

United States
Environmental Protection
Agency

Research and Development



Municipal Environmental Research
Laboratory
Cincinnati OH 45268

EPA-600/8-80-023
April 1980

Carbon Adsorption Isotherms for Toxic Organics

US EPA RECORDS CENTER REGION 5



515318



RESEARCH REPORTING SERIES

Research reports of the Office of Research and Development, U.S. Environmental Protection Agency, have been grouped into nine series. These nine broad categories were established to facilitate further development and application of environmental technology. Elimination of traditional grouping was consciously planned to foster technology transfer and a maximum interface in related fields. The nine series are:

1. Environmental Health Effects Research
2. Environmental Protection Technology
3. Ecological Research
4. Environmental Monitoring
5. Socioeconomic Environmental Studies
6. Scientific and Technical Assessment Reports (STAR)
7. Interagency Energy-Environment Research and Development
8. "Special" Reports
9. Miscellaneous Reports

This report has been assigned to the "SPECIAL" REPORTS series. This series is reserved for reports targeted to meet the technical information needs of specific user groups. The series includes problem-oriented reports, research application reports, and executive summary documents. Examples include state-of-the-art analyses, technology assessments, design manuals, user manuals, and reports on the results of major research and development efforts.

EPA-600/8-80-023
April 1980

CARBON ADSORPTION ISOTHERMS FOR TOXIC ORGANICS

by

Richard A. Dobbs
Jesse M. Cohen
Wastewater Research Division
Municipal Environmental Research Laboratory
Cincinnati, Ohio 45268

MUNICIPAL ENVIRONMENTAL RESEARCH LABORATORY
OFFICE OF RESEARCH AND DEVELOPMENT
U.S. ENVIRONMENTAL PROTECTION AGENCY
CINCINNATI, OHIO 45268

DISCLAIMER

This report has been reviewed by the Municipal Environmental Research Laboratory, U.S. Environmental Protection Agency, and approved for publication. Mention of trade names or commercial products does not constitute endorsement or recommendation for use.

FOREWORD

The Environmental Protection Agency was created because of increasing public and government concern about the dangers of pollution to the health and welfare of the American people. Noxious air, foul water, and spoiled land are tragic testimony to the deterioration of our natural environment. The complexity of that environment and the interplay between its components require a concentrated and integrated attack on the problem.

Research and development is that necessary first step in problem solution, and it involves defining the problem, measuring its impact, and searching for solutions. The Municipal Environmental Research Laboratory develops new and improved technology and systems for the prevention, treatment, and management of wastewater and solid and hazardous waste pollutant discharges from municipal and community sources, for the preservation and treatment of public drinking water supplies, and to minimize the adverse economic, social, health and aesthetic effects of pollution. This publication is one of the products of that research; a most vital communications link between the researcher and the user community.

This laboratory has had a continuing interest in the adsorption of organic compounds on activated carbon. During the past several years adsorption data have been determined for compounds for which little or no data are available in the literature.

The recent interest in toxic substances and their treatability by carbon has created a need for this kind of information. To meet this demand data from this laboratory have been collected under one cover. A second purpose of this report is to encourage some uniformity in the testing protocol and handling of data so that adsorbability data can be compared among compounds.

Francis T. Mayo
Director
Municipal Environmental Research
Laboratory

ABSTRACT

This research program was initiated with the overall objective of determining the capability of activated carbon to sorb priority pollutants and other hazardous organic compounds from aqueous solution.

An experimental protocol for measuring the activated carbon adsorption isotherm was developed and applied to a wide range of organic compounds. Methods for treatment of the isotherm data and a standard format for presentation of results are presented. In the early phase of the study selection of compounds for testing in the experimental program presented a formidable task. Initial selections were based on the following criteria: (1) annual quantity produced, (2) critical concentration required to produce an adverse environmental effect, (3) probability of occurrence in water or wastewater, (4) persistence in the water environment, and (5) solubility. During the course of the study the Occupational Safety and Health Administration's (OSHA) list of regulated carcinogens and the U.S. Environmental Protection Agency's Consent Decree list of priority pollutants were developed. These compounds were added to those previously selected for the experimental phase of the study.

This report covers a period from August 8, 1972, to March 31, 1980.

CONTENTS

Foreword	iii
Abstract	iv
Alphabetical List of Compounds	vi
Figures and Tables	viii
Acknowledgement	ix
1. Introduction	1
2. Conclusions	3
3. Recommendations	4
4. Materials and Methods	5
Selection and Source of Compounds	5
Adsorbent	5
Analytical Methods	5
5. Experimental Procedures	7
Preparation of Carbon Slurry	7
Preparation of Test Solutions	7
Validation of Experimental Protocol	8
6. Results and Discussion	11
Treatment of Isotherm Data	11
Presentation of Data	12
Summary of Data	14
7. Isotherms for Individual Compounds	19
References	306
Bibliography	308
Appendices	309
A. Activated Carbon Adsorption Isotherm Protocol	309
B. Published Solubilities of Selected Compounds	315

ALPHABETICAL LIST OF COMPOUNDS

<u>Compound</u>	<u>Page No.</u>	<u>Compound</u>	<u>Page No.</u>
Acenaphthene	20	Chlordane	90
Acenaphthylene	22	Chloroethane	92
Acetone cyanohydrin	24	bis(2-Chloroethoxy)methane	94
Acetophenone	26	bis(2-Chloroethyl)ether	96
2-Acetylaminofluorene	28	2-Chloroethyl vinyl ether	98
Acridine orange	30	Chloroform	100
Acridine yellow	32	bis(2-Chloroisopropyl)ether	102
Acrolein	34	Parachlorometa cresol	104
Acrylonitrile	36	2-Chloronaphthalene	106
Adenine	38	1-Chloro-2-nitrobenzene	108
Adipic acid	46	2-Chlorophenol	110
Aldrin	42	4-Chlorophenyl phenyl ether	112
4-Aminobiphenyl	44	5-Chlorouracil	114
Anethole	46	Choline chloride	116
o-Anisidine	48	Cyclohexanone	118
Anthracene	50	Cyclohexylamine	120
Benzene	52	Cytosine	122
Benzidine dihydrochloride	54	DDE	124
Benzoic acid	56	DDT	126
3,4-Benzofluoranthene	58	Dibenzo(a,h)anthracene	128
Benzo(k)fluoranthene	60	Dibromochloromethane	130
Benzo(ghi)perylene	62	1,2-Dibromo-3-chloropropane	132
Benzo(a)pyrene	64	1,2-Dichlorobenzene	134
Benzothiazole	66	1,3-Dichlorobenzene	136
alpha-BHC	68	1,4-Dichlorobenzene	138
Beta-BHC	70	3,3-Dichlorobenzidine	140
gamma-BHC (lindane)	72	Dichlorobromomethane	142
Bromoform	74	1,1-Dichloroethane	144
4-Bromophenyl phenyl ether	76	1,2-Dichloroethane	146
5-Bromouracil	78	1,2-trans-Dichloroethene	148
Butylamine	80	1,1-Dichloroethylene	150
Butylbenzyl phthalate	82	2,4-Dichlorophenol	152
N-Butyl phthalate	84	1,2-Dichloropropane	154
Carbon tetrachloride	86	1,2-Dichloropropene	156
Chlorobenzene	88	Dieldrin	158

ALPHABETICAL LIST OF COMPOUNDS (continued)

<u>Compound</u>	<u>Page No.</u>	<u>Compound</u>	<u>Page No.</u>
Diethylene glycol	160	4,4'-Methylene-bis-(2-chloroaniline)	234
Diethyl phthalate	162	Morpholine	236
4-Dimethylaminoazo-benzene	164	Naphthalene	238
N-Dimethylnitrosamine	166	alpha-Naphthol	240
2,4-Dimethylphenol	168	beta-Naphthol	242
Dimethyl phenyl carbinol	170	alpha-Naphthylamine	244
Dimethyl phthalate	172	beta-Naphthylamine	246
4,6-Dinitro-o-cresol	174	p-Nitroaniline	248
2,4-Dinitrophenol	176	Nitrobenzene	250
2,4-Dinitrotoluene	178	4-Nitrobiphenyl	252
2,6-Dinitrotoluene	180	2-Nitrophenol	254
Diphenylamine	182	4-Nitrophenol	256
1,1-Diphenylhydrazine	184	N-Nitrosodiphenylamine	258
1,2-Diphenylhydrazine	186	N-Nitrosodi-n-propylamine	260
alpha-Endosulfan	188	p-Nonylphenol	262
beta-Endosulfan	190	PCB-1221	264
Endosulfan sulfate	192	PCB-1232	266
Endrin	194	Pentachlorophenol	268
Ethanol	196	Phenanthrene	270
Ethylbenzene	198	Phenol	272
Ethylenediamine	200	Phenylmercuric acetate	274
Ethylenediamine tetra-acetic acid	202	Styrene	276
bis(2-Ethylhexyl)phthalate	204	1,1,2,2-Tetrachloroethane	278
Fluoranthene	206	Tetrachloroethene	280
Fluorene	208	1,2,3,4-Tetrahydronaphthalene	282
5-Fluorouracil	210	Thymine	284
Guanine	212	Toluene	286
Heptachlor	214	1,2,4-Trichlorobenzene	288
Heptachlor epoxide	216	1,1,1-Trichloroethane	290
Hexachlorobenzene	218	1,1,2-Trichloroethane	292
Hexachlorobutadiene	220	Trichloroethene	294
Hexachlorocyclopentadiene	222	Trichlorofluoromethane	296
Hexachloroethane	224	2,4,6-Trichlorophenol	298
Hexamethylenediamine	226	Triethanolamine	300
Hydroquinone	228	Uracil	302
Isophorone	230	p-Xylene	304
Methylene chloride	232		

FIGURES AND TABLES

<u>Figure</u>		<u>Page</u>
1	Percent of equilibrium capacity attained as a function of time	10
<u>Table</u>		
1	Effect of Ethanol on Adsorption Capacity of 2-Chlorophenol .	8
2	Reproducibility of Experimental Protocol	9
3	Summary of Carbon Adsorption Capacities	15

ACKNOWLEDGEMENTS

The authors gratefully acknowledge the laboratory and editorial assistance of Michael Jelus. Others who assisted in the laboratory phase include Richard J. Middendorf, Mary Anne Leugers, Richard A. Fiutem, Elmer D. Lipp, and Amy Knipschild.

Carcinogenic compounds specified in the text were investigated by Illinois Institute of Technology Research Institute under Contract No. CI-68-03-2559 and 68-03-2834. Edward G. Fochtman served as Principal Investigator for both contracts.

SECTION 1

INTRODUCTION

A vast number of synthetic organic chemicals are being produced by industry, some of which are introduced into the environment. A measure of the immensity of the problem can be obtained from the American Chemical Society's Chemical Abstract Service whose registry of chemicals lists 4,039,907 distinct entities as of November, 1977. New compounds are being added to the registry at an average rate of about 6,000 per week (1). Of these, Chemical Abstract Service lists some 33,000 chemicals that are thought to be in common use, excluding pesticides, pharmaceuticals, and food additives. Thus, a large number of synthetic organic chemicals are being introduced into the environment. By 1976 some 1,260 organic chemicals were reported found or suspected in fresh water (2) and the list is expanding rapidly as analytical techniques are refined and surveys are conducted on streams, industrial, and municipal wastewaters and potable waters.

The presence of synthetic organic compounds in the environment can have severe adverse effects. These effects include toxicity, carcinogenicity, mutagenicity, or teratogenicity in man and animals, toxicity to aquatic life, and degradation of the quality of water for human consumption. Hence, there is a need to develop control technology capable of removing hazardous organics from water to prevent further dispersion into the environment. Adsorption on powdered or granular activated carbon is being increasingly considered as a method for removal of organic compounds.

While studies on the adsorption of specific organic compounds on activated carbon are extremely limited when the vast number of chemical entities are considered, a substantial number of investigations have been reported. A summary of some of the literature is described below. Linner and Gortner (3) studied a series of 31 organic acids. More recent studies have investigated the adsorption of organic compounds of environmental concern. Morris and Weber (4,5) reported data on the adsorption of phenol, sodium salts of sulfonated organics and pesticides. Adsorption of aromatic acids has been reported by Ward and Getzen (6). Carbon loading values of 300 mg/g of carbon at a residual concentration of 1 mg/l have been reported for the herbicide 2,4-dichlorophenoxyacetic acid (7). Dedrick and Beckman (8) found approximately 20% less adsorption capacity for the same compound. Weber and Gould (9) and DiGiano and Weber (10) investigated the adsorption of organic pesticides including related phenols. Freundlich parameters have been reported for the carbamate insecticides Sevin (1-naphthyl-N-methylcarbamate) and Baygon (2-isopropoxy-N-methylcarbamate) (11). Bernardin and Froelich (12) measured the adsorption of aldrin, dieldrin, endrin, DDT, DDD, DDE, Toxaphene and PCB on activated carbon and were able to achieve residuals of less than

1 ug/l for each compound in the treated water. Lawrence and Tosine (13) studied the adsorption of polychlorinated biphenyls from aqueous solution and sewage. The effect of molecular structure on the adsorption of substituted benzene compounds was determined by Al-Bahrani and Martin (14). Argaman (15) compared the adsorption of dichloroethane on three different activated carbons. Singer and Yen (16) studied the adsorption of phenol, methylphenol, ethylphenol, dimethylphenol and isopropylphenol on a petroleum-base carbon. Murin and Snoeyink (17) studied the adsorption of 2,4-dichlorophenol and 2,4,6-trichlorophenol at different pH values and determined the effect of humic substances on the adsorption capacity. Removal of methoxy-chlor from potable water was investigated by Steiner and Singley (18). Adsorption of benzene, toluene, o-xylene and ethylbenzene was investigated by El-Dib and Badawy (19). Peel and Benedek (20) emphasized the kinetic factors in a study on the adsorption of phenol and o-chlorophenol. Fochtman and Dobbs (21) measured the adsorption isotherms for naphthalene, 1,1'-diphenylhydrazine, beta-naphthylamine, 4,4'-methylene bis(2-chloroaniline), benzidine, dimethylnitrosamine, and 3,3'-dichlorobenzidine and described general procedures for handling chemical carcinogens in the research laboratory.

Although the literature contains data on adsorption of specific compounds, the experimental techniques and methods of reporting the data are so varied, that it is difficult to compare adsorbability among compounds. As a result, a major objective of the present study was to standardize the experimental procedure as well as the method of reporting results. Under these conditions, information on adsorption can be compared on a common basis. A second objective was to provide carbon adsorption data for selected compounds of environmental concern. The approach chosen to describe adsorption was batch equilibrium carbon adsorption isotherms with the results plotted according to the Freundlich adsorption equation.

SECTION 2

CONCLUSIONS

The results of experimental studies on the adsorption of priority pollutants and other hazardous organic compounds have shown that activated carbon treatment can effectively remove many of these substances from aqueous solution. Pesticides, polynuclear aromatic hydrocarbons, phthalates, phenolics, and substituted benzenes are readily adsorbed by activated carbon. Certain low molecular weight compounds with high polarity are not amenable to activated carbon treatment. Compounds in this category include low molecular weight amines, nitrosamines, glycols, and certain ethers.

The experimental protocol developed for the isotherm testing provides a simple reproducible procedure for estimating the capacity of activated carbon for adsorption of specific compounds from aqueous solution. The data summary containing the Freundlich parameters and the calculated carbon requirements for granular and powdered carbon treatment simplifies the evaluation of treatability by carbon adsorption.

SECTION 3

RECOMMENDATIONS

Activated carbon adsorption isotherm testing of specific organic compounds should be continued in order to develop a broader base of information for assessing the potential of the process for control of toxic or hazardous compounds. Studies should be directed toward correlation of laboratory isotherm capacity with column loading in treatment operations. Kinetic factors for both granular and powdered carbon treatment need to be investigated. Correlation of adsorption capacities with fundamental molecular properties should be attempted in order to develop the capability to estimate treatability of compounds for which isotherm data are lacking.

Isotherm data for a variety of different activated carbons should be developed using a standard protocol for selected compounds in order to compare adsorption capacities with carbon properties.

SECTION 4

MATERIALS AND METHODS

SELECTION AND SOURCE OF COMPOUNDS

Compounds selected for the present investigation were taken from the following: (1) U.S. Environmental Protection Agency Effluent Guidelines Division list of priority pollutants, (2) Occupational Safety and Health Administration's list of regulated carcinogens, and (3) a list of special interest compounds chosen by the authors.

The organic compounds were used as received from the suppliers: Aldrich Chemical Company, Eastman Organic Chemicals, Chem Service, Inc., and the U.S. Environmental Protection Agency's Health Effects Research Laboratory. Carcinogenic compounds were obtained from National Cancer Institute's Chemical Repository at IIT Research Institute. In general, the compounds assayed greater than 95% and were used without correction for purity.

ADSORBENT

Filtrasorb 300 granular activated carbon, a product of Calgon Corporation, was used as the adsorbent. The granular carbon was pulverized in a ball mill and then screened for classification. Only that portion which passed a 200 mesh (0.0736 mm) screen but was retained by a 400 mesh (0.0381 mm) screen was used for isotherm tests. The carbon was repeatedly milled and screened so that practically all of the original carbon was retained as a powdered sample. After classification the powdered carbon was oven-dried overnight at 105°C, cooled in a desiccator and stored there until needed for experimental purposes. A slurry of the pulverized and screened carbon was prepared in distilled water at an appropriate concentration and the thoroughly wetted carbon suspension was used in the isotherm tests.

ANALYTICAL METHODS

A variety of analytical procedures were used to analyze samples for initial and residual concentration of test compound.

Chlorinated volatile compounds were analyzed by purge and trap gas chromatography as described by Bellar and Lichtenberg (22). A Tenax GC trap was used in conjunction with a 0.2% Carbowax 1500 on 60/80 mesh Carbo pack C column. Samples were analyzed using a Tracor Model 222 Gas Chromatograph equipped with a Tracor 310 Hall Electrolytic Detector.

Aromatic and substituted aromatic compounds were generally determined by U-V spectroscopy. A Beckman Model 25 Spectrophotometer equipped with automatic sampler was used to obtain a scan of each test compound in aqueous solution and for the fixed wavelength quantitative measurements.

Solvent extraction - gas chromatography was used for compounds with limited solubility which were not measurable by U-V spectroscopy or purge and trap gas chromatography. The method involved solvent extraction of the aqueous sample with Freon, methylene chloride, or hexane followed by sodium sulfate drying, concentration of the extract in a Kuderna-Danish apparatus, and gas chromatography as reported by Austern, et al., (23). Extracts were analyzed using a Varian Model 3700 gas chromatograph equipped with flame ionization and electron capture detectors.

Polynuclear aromatic hydrocarbons with limited solubility were analyzed by fluorescence spectroscopy. An American Instrument Company Aminco-Bowman Spectrophotofluorometer Model J48960 equipped with Xenon lamp was used for fluorescence measurements. Excitation and emission wavelengths used for analytical purposes are presented on the appropriate data forms.

Several low molecular weight compounds were analyzed with a Beckman Total Organic Carbon Analyzer Model 915B. Samples were acidified and purged for total organic carbon analysis or injected directly for a total carbon measurement. The latter was the method of choice for volatile organics which could not be purged without significant loss of compound.

A more complete description of recommended test procedures for the analysis of priority pollutants has recently been published by the Environmental Monitoring and Support Laboratory of the U.S. Environmental Protection Agency (24).

SECTION 5

EXPERIMENTAL PROCEDURES

A general description of the carbon adsorption isotherm procedure used in the present study is presented in Appendix A. Slight modifications were required for certain compounds. These will be described at the appropriate place in the text.

PREPARATION OF CARBON SLURRY

All isotherm tests were conducted using a thoroughly wetted carbon slurry. The initial slurry was prepared by weighing 50.00 grams of pulverized and screened carbon and diluting to 1.0 liter with distilled water. Other working standard slurries were prepared by serial dilution of the original stock. Desired carbon doses were achieved by using dispensing pipettes of differing volumes. The initial slurry and all serial dilutions were stored in the dark until needed for isotherm testing.

PREPARATION OF TEST SOLUTIONS

Standard solutions of the compounds were prepared in distilled water or mineralized distilled water by several methods. Aqueous solutions of the volatile compounds were prepared by injecting an ethanolic standard solution into the bottle containing distilled water. The bottle was completely filled and capped to minimize loss of compound.

Polynuclear aromatic hydrocarbon stock standard solutions were prepared by injecting a methylene chloride solution of the compound into distilled water and stirring for one to three days to ensure dissolution. Analysis of the resulting solution for methylene chloride at the end of the mixing period indicated complete loss of the solvent. Dissolution of the polynuclear aromatic hydrocarbons was carried out in the dark to avoid photochemical decomposition. Some of the more insoluble polynuclear aromatic compounds were treated by a modified protocol. Standard solutions were prepared using coated-glass beads as described by May and Wasik (25). Each isotherm point corresponding to a single carbon dose required a separate standard solution often at a different initial concentration. Since the initial concentration varied for the series of carbon doses, a modified data reporting form was developed for these cases.

All pesticides and polychlorinated biphenyls were added to the distilled water as an acetone standard solution. Use of an organic solvent facilitates the dissolution of the organic compound in aqueous solution. Minimum quantities of acetone were used and no effect on the isotherm was

expected from the small concentrations of solvent because of the very low adsorbability of acetone and the concurrently high adsorption of the pesticides.

Several compounds were weighed and added directly to the distilled water to prepare aqueous solutions. These were mostly solids which were readily soluble in water. Simple aromatic compounds were added as alcoholic solutions.

VALIDATION OF EXPERIMENTAL PROTOCOL

Several aspects of the general isotherm protocol needed to be evaluated in order to validate the proposed procedures. These included: (1) the effect of ethanol on the measured adsorption capacity of a compound, (2) rate of adsorption of compounds to determine whether or not the proposed two-hour contact time was adequate and, (3) reproducibility of the total procedure.

The maximum concentration of ethanol used in the preparation of the aqueous test solutions was 0.008 % w/w (78.9 mg/l). In most cases ethanol concentrations were 0.002 % w/w (15.6 mg/l) or less. Two tests were performed to determine the effect of added ethanol. In the first test an isotherm was obtained using ethanol in aqueous solution as the test compound. The second test determined the effect of the presence of ethanol on the adsorption capacity of 2-chlorophenol. Results are summarized in Table 1.

TABLE 1. EFFECT OF ETHANOL ON ADSORPTION CAPACITY OF 2-CHLOROPHENOL

<u>Wt.% Ethanol* Added</u>	<u>Adsorption Capacity^(a) (mg/g)</u>	<u>1/n (slope)</u>
0	61	0.38
0.001	56	0.38
0.010	57	0.39
0.100	58	0.33

*Sp. gr. 0.789

(a) Adsorption capacities are calculated at a residual concentration of 1 mg/l in equilibrium with activated carbon at neutral pH.

The rate of adsorption was investigated using three compounds selected to represent acidic, basic, and neutral compounds with weak, moderate, and strong adsorption capacities. The compounds selected were 2-chlorophenol, diphenylamine and 2-chloronaphthalene. Each compound was tested at a concentration of 2.0 mg/l at one carbon dosage. Carbon dosages were selected to remove most of the compound but still leave sufficient residual concentration for analysis by U-V spectroscopy. The resulting data on the

approach to equilibrium are presented in Figure 1.

Reproducibility of the experimental isotherm protocol was determined by repetitive measurement of the adsorption capacity for 2-chlorophenol at neutral pH. The results of seven independent isotherm measurements are given in Table 2.

TABLE 2. REPRODUCIBILITY OF EXPERIMENTAL PROTOCOL

<u>Isotherm No.</u>	<u>Adsorption Capacity*, mg/g</u>
1	62.0
2	63.3
3	52.1
4	52.1
5	53.9
6	56.9
7	<u>60.1</u>
Average	57.1
Standard deviation	4.7

*Calculated for an equilibrium concentration of 1.0 mg/l of 2-chlorophenol.

Successful demonstration of the basic protocol was followed by an extensive program to obtain isotherms for the compounds selected. Isotherms were obtained on all of the desired compounds, with some exceptions. Those excluded were (a) compounds which were gases at room temperature, (b) substances not readily available or not available at reasonable cost, (c) compounds which exhibited some form of instability in aqueous solution. In cases where a series of similar or related compounds were listed, enough members of that class were included in the isotherm study to provide a basis for estimating the adsorbability of members not actually tested. For example, not all PCBs and polynuclear aromatic compounds were tested. However, those that were measured indicate that all of the class are adsorbable. The results are presented on standardized data forms developed to facilitate comparison of adsorption data.

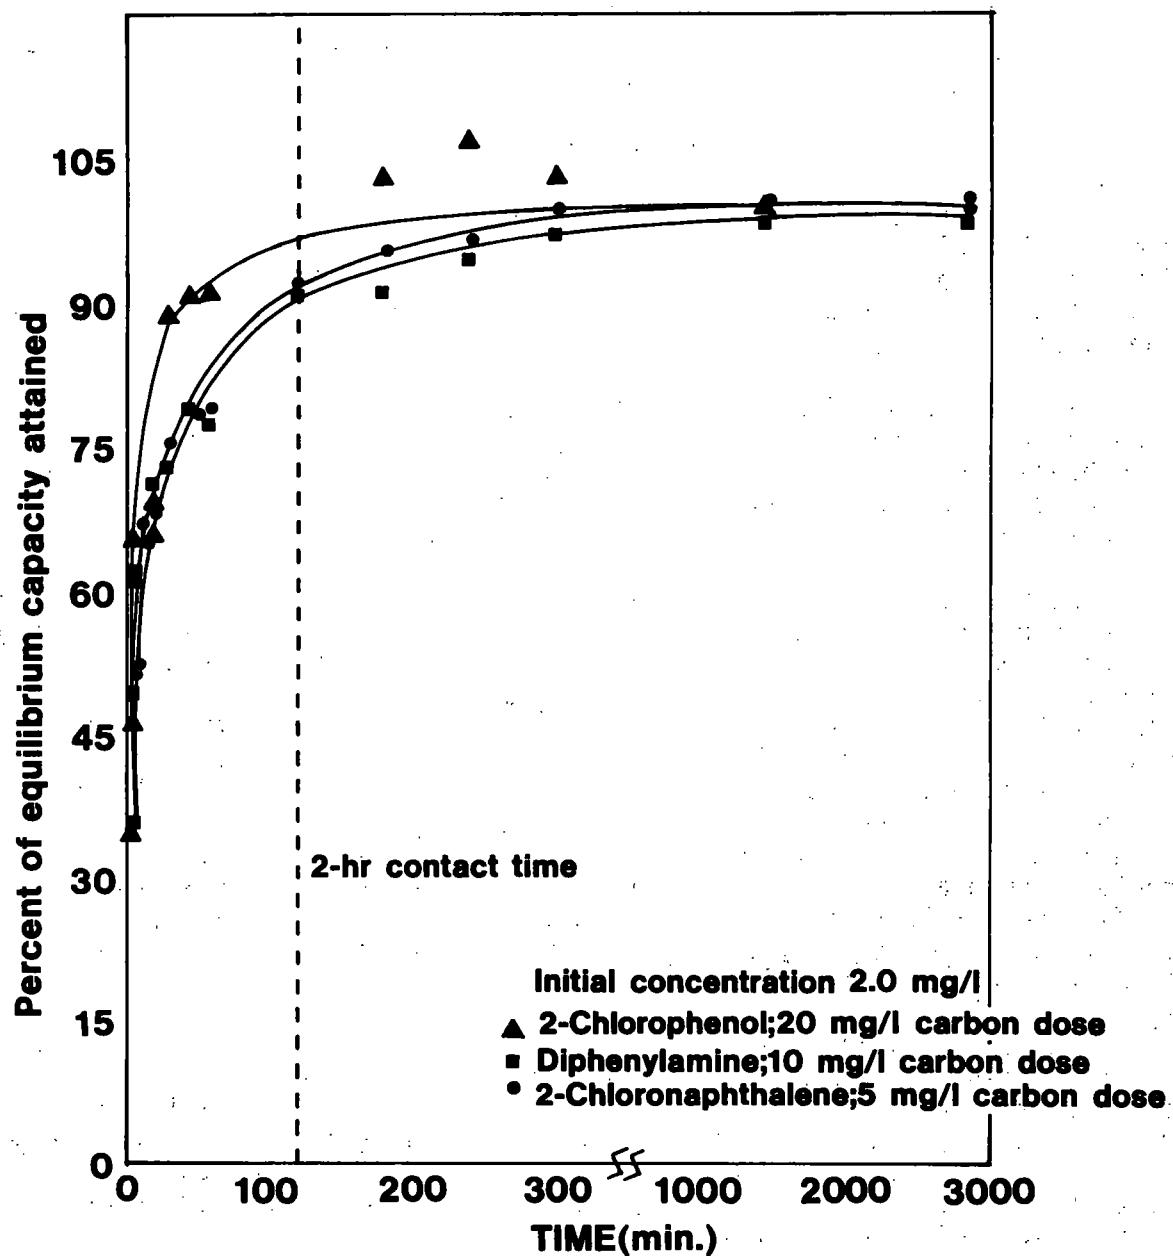


Figure 1. Percent of equilibrium capacity attained as a function of time.

SECTION 6

RESULTS AND DISCUSSION

An attempt to measure an isotherm for ethanol at an initial concentration of 67 mg/l showed less than a 10% reduction in residual concentration for a carbon dose of almost 10 g/l. Therefore, it was concluded that ethanol was not adsorbed and would not compete for adsorption capacity with the test compounds.

Although adsorption from an organic solvent has been reported to be much lower than that obtained from aqueous solution (26) the concentrations of ethanol used in the present study did not alter the adsorption capacity of 2-chlorophenol even when ten times the maximum concentration used in the experimental study was tested as shown in Table 1.

The two-hour contact time specified in the adsorption protocol appears to be adequate for purposes of comparing adsorption characteristics of different compounds. Percent of equilibrium values for the two-hour contact time for 2-chlorophenol, diphenylamine and 2-chloronaphthalene were 92%, 91% and 92%, respectively, as illustrated in Figure 1. In these calculations, equilibrium was considered to be attained after 3,000 minutes, since no further adsorption occurred between 2,000 minutes and 3,000 minutes of contact time. A four-hour contact time would result in slightly greater capacities and may be preferred for some applications. However, other factors, such as purity of the reagents, photochemical effects, variations in different lots of carbon, and method of chemical analysis may all contribute to the measured adsorption capacity in a more significant manner than the additional contact time.

The reproducibility of the total isotherm protocol has been demonstrated to be $\pm 8.2\%$. The adsorption capacity for 2-chlorophenol (57.1 ± 4.7 mg/g) at an equilibrium concentration of 1.0 mg/l illustrates the reproducibility that can be expected. Results from another laboratory have been reported on several compounds included in the present study using the protocol presented in Appendix A (27). Results between laboratories were reproducible with deviations less than $\pm 10\%$.

TREATMENT OF ISOTHERM DATA

The carbon adsorption data were plotted according to the Freundlich equation. While the equation is empirical it is nonetheless widely used and has been found to describe adequately the adsorption process in dilute solution. The Freundlich equation has the form:

$$X/M = KC_f^{1/n}$$

where:

$X = C_0 - C_f$ is the amount of compound adsorbed from a given volume of solution,

M = the weight of activated carbon

C_0 = the amount of compound in the untreated solution,

C_f = the amount of compound remaining in the treated water,

K and $1/n$ are empirical constants characteristic of the compound and carbon used in the test. Graphically, K is the X/M intercept of the isotherm plot at $C_f = 1$ and $1/n$ is the slope of the line when the equation is plotted on logarithmic paper. The intercept is an indicator of adsorption capacity and the slope of adsorption intensity. The concentration of adsorbate on the adsorbent in equilibrium with a concentration C_f is expressed by X/M . In this study X/M was expressed as mg compound adsorbed per gram of carbon.

Data were fitted to the logarithmic form of the above equation, which has the form:

$$\log X/M = \log K + 1/n \log C_f \quad (2)$$

PRESENTATION OF DATA

The experimental data for each of the compounds tested are summarized on standardized data forms. Carbon dosages used in the isotherm procedure are shown on the left hand column along with the initial C_0 , and residual concentrations after treatment with pulverized activated carbon. Data are expressed in mg/l. These values were then used to calculate the amount of compound removed ($C_0 - C_f$) and the carbon loading, X/M expressed as mg/g. The data were plotted according to equation(2) on logarithmic paper. Linear least squares regression analysis was used to locate the isotherm line. Some of the compounds were tested at differing pH's. When pH affected adsorption, individual lines were drawn to show the effect of pH. If pH had no observable effect on adsorption, all of the data points were plotted and represented by a single line.

On the first page of the data form for each compound, the molecular structure, formula and molecular weight are given. The equation of the regression line was used to calculate the values for the intercept, K , and the slope $1/n$. The K value represents the carbon loading, X/M , in mg compound/gram of carbon at an equilibrium concentration of 1.0 mg/l of compound. K values were summarized at this concentration for comparison purposes even though 1.0 mg/l exceeded the solubility of several of the compounds tested. Thus, some K values for the extremely insoluble compounds represent a substantial extrapolation of the data by as much as two or three orders of

magnitude. Available information on the solubility of test compounds is presented in Appendix B. Also shown on the data form is the correlation coefficient, r , for the linear regression analysis.

As the Freundlich equation indicates, the loading on the carbon, X/M , is a function of the equilibrium concentration of organic compound after carbon treatment. This effect is shown in the next table on the data sheet. The adsorption capacity in mg/gram for varying equilibrium concentrations of organic compound ranging from 0.001 to 1.0 mg/l, were calculated from the equation of the regression line.

The Freundlich equation can be rearranged to calculate the carbon dose required to reduce any initial concentration of compound to some predetermined residual concentration. If, for the term X , use is made of its equivalent, $C_0 - C_f$, in which C_0 equals the initial concentration of organic compound and C_f the residual concentration, the equation can now be written as follows:

$$\frac{C_0 - C_f}{M} = KC_f^{1/n} \quad (3)$$

Equation 3 can be solved directly for the carbon dose required or the equation can be rearranged to the logarithmic form:

$$\log (C_0 - C_f) - \log M = \log K + 1/n \log C_f \quad (4)$$

Equation 3 is linear when M (carbon dose) is plotted against C_0 initial concentration on ordinary coordinate paper. These calculations were made for a range of initial and final concentrations. The resulting carbon doses are tabulated in mg/l for neutral pH in the bottom table of the data sheet (solution of equations 3 and 4 gives M = grams/liter if C_0 and C_f are in mg/l and K is in mg/g). For compounds which were essentially non-adsorbable, the calculated carbon dosages were considered too high to be practical and are shown in the table as greater than 100,000 mg/l carbon.

The tabulated carbon doses represent removals obtainable in a single-stage contactor. More efficient use of carbon can be realized by multiple stages of contacting. The carbon dose values are, however, useful for comparative purposes and to ascertain whether use of carbon is feasible for removal of a compound.

Data are provided to calculate the carbon dose to reduce any initial concentration of a compound to any desired final concentration. For example, consider the following for benzidine. To calculate the carbon required to reduce a benzidine concentration from 10 mg/l to 0.1 mg/l in neutral solution, equation 4 is used. Values for the constants are taken from the first page of the data sheets for benzidine. Thus,

$$\log (10 - 0.1) - \log M = \log 220 + 0.37 \log 0.1$$

$$M = 0.100 \text{ g/l or } 100 \text{ mg/l}$$

The tabulated carbon doses are also useful to illustrate the benefit of more than one stage of treatment. Consider again the case of benzidine. To reduce an initial concentration of 10 mg/l to 0.1 mg/l in a single stage requires 100 mg/l of activated carbon. If removal is accomplished in two stages; i.e., 10 mg/l to 1.0 mg/l in the first stage followed by 1.0 mg/l to 0.1 mg/l in a second stage, the carbon dose is $40 \text{ mg/l} + 9.4 \text{ mg/l} = 49.4 \text{ mg/l}$ of carbon or about one-half the dose required in a single stage process.

The ultimate number of stages in a carbon adsorption system is achieved in column operation. Carbon requirements for column adsorption systems can be estimated from the Freundlich equation. To estimate the granular carbon requirements for column operation obtain the adsorption capacity from the isotherm plot for the concentration of compound to be treated. This capacity designated $(X/M)_{C_0}$ is the ultimate capacity of the carbon for the adsorbate at that concentration (C_0). This capacity represents the ultimate loading for a single component solution that can be attained during granular carbon column treatment, if the column is operated until the adsorbate concentration in the effluent is equal to the influent. Granular carbon requirement (G_C) can be calculated from the following equation:

$$G_C = \frac{C_0}{(X/M)_{C_0}} \quad (5)$$

If C_0 is in mg/l and X/M is in mg/g carbon requirements will be in g/l. Multiplication by 1,000 gives mg/l and multiplication of that product by 8.337 gives pounds per million gallons to be treated. For example, consider the case of granular carbon treatment of a solution containing 1 mg/l of benzidine ($C_0 = 1.0 \text{ mg/l}$; $X/M = 220 \text{ mg/g}$). Solution of equation 5 yields:

$$G_C = \frac{1}{220} = 0.0045 \text{ g/l or } 4.5 \text{ mg/l}$$

SUMMARY OF DATA

A summary of the adsorption capacities for all of the compounds tested (at neutral pH) are shown in Table 3. The values are arranged in descending order. The constant, K, expressed as mg compound/gram of carbon, corresponds to the capacity, X/M , when the equilibrium concentration of compound is 1.0 mg/l.

Activated carbon exhibits a broad range of effectiveness in adsorbing organic compounds. Low molecular weight compounds with polar characteristics are not well adsorbed, if at all. Pesticides, polychlorinated biphenyls, polynuclear aromatic hydrocarbons, phthalates, aromatic, and substituted aromatic compounds were strongly adsorbed on activated carbon. Treatability of water and wastewater for removal of organics can be evaluated using the isotherm procedure.

TABLE 3. SUMMARY OF CARBON ADSORPTION CAPACITIES

Compound	Adsorption(a) Capacity, mg/g	Compound	Adsorption(a) Capacity, mg/g
bis(2-Ethylhexyl) phthalate	11,300	Phenanthrene	215
Butylbenzyl phthalate	1,520	Dimethylphenylcarbinol*	210
Heptachlor	1,220	4-Aminobiphenyl	200
Heptachlor epoxide	1,038	beta-Naphthol*	200
Endosulfan sulfate	686	alpha-Endosulfan	194
Endrin	666	Acenaphthene	190
Fluoranthene	664	4,4' Methylene-bis-(2-chloroaniline)	190
Aldrin	651	Benzo(k)fluoranthene	181
PCB-1232	630	Acridine orange*	180
beta-Endosulfan	615	alpha-Naphthol	180
Dieldrin	606	4,6-Dinitro-o-cresol	169
Hexachlorobenzene	450	alpha-Naphthylamine	160
Anthracene	376	2,4-Dichlorophenol	157
4-Nitrobiphenyl	370	1,2,4-Trichlorobenzene	157
Fluorene	330	2,4,6-Trichlorophenol	155
DDT	322	beta-Naphthylamine	150
2-Acetylaminofluorene	318	Pentachlorophenol	150
alpha-BHC	303	2,4-Dinitrotoluene	146
Anethole*	300	2,6-Dinitrotoluene	145
3,3-Dichlorobenzidine	300	4-Bromophenyl phenyl ether	144
2-Chloronaphthalene	280	p-Nitroaniline*	140
Phenylmercuric Acetate	270	1,1-Diphenylhydrazine	135
Hexachlorobutadiene	258	Naphthalene	132
gamma-BHC (lindane)	256	1-Chloro-2-nitrobenzene	130
p-Nonylphenol	250	1,2-Dichlorobenzene	129
4-Dimethylaminoazobenzene	249	p-Chlorometacresol	124
Chlordane	245	1,4-Dichlorobenzene	121
PCB-1221	242	Benzothiazole*	120
DDE	232	Diphenylamine	120
Acridine yellow*	230	Guanine*	120
Benzidine dihydrochloride	220	Styrene	120
beta-BHC	220	1,3-Dichlorobenzene	118
N-Butylphthalate	220	Acenaphthylene	115
N-Nitrosodiphenylamine	220	4-Chlorophenyl phenyl ether	111
		Diethyl phthalate	110

TABLE 3. SUMMARY OF CARBON ADSORPTION CAPACITIES (cont.)

<u>Compound</u>	<u>Adsorption^(a) Capacity, mg/g</u>	<u>Compound</u>	<u>Adsorption^(a) Capacity, mg/g</u>
2-Nitrophenol	99	Bromoform	20
Dimethyl phthalate	97	Carbon tetrachloride	11
Hexachloroethane	97	bis(2-Chloroethoxy) methane	11
Chlorobenzene	91	Uracil*	11
p-Xylene	85	Benzo(ghi)perylene	11
2,4-Dimethylphenol	78	1,1,2,2-Tetrachloroethane	11
4-Nitrophenol	76	1,2-Dichloropropene	8.2
Acetophenone	74	Dichlorobromomethane	7.9
1,2,3,4-Tetrahydro- naphthalene	74	Cyclohexanone*	6.2
Adenine*	71	1,2-Dichloropropane	5.9
Dibenzo(a,h)anthracene	69	1,1,2-Trichloroethane	5.8
Nitrobenzene	68	Trichlorofluoromethane	5.6
3,4-Benzofluoranthene	57	5-Fluorouracil*	5.5
1,2-Dibromo-3-chloro- propane	53	1,1-Dichloroethylene	4.9
		Dibromochloromethane	4.8
Ethylbenzene	53	2-Chloroethyl vinyl ether	3.9
2-Chlorophenol	51	1,2-Dichloroethane	3.6
Tetrachloroethene	51	1,2-trans-Dichloroethene	3.1
o-Anisidine*	50	Chloroform	2.6
5-Bromouracil	44	1,1,1-Trichloroethane	2.5
Benzo(a)pyrene	34		
2,4-Dinitrophenol	33	1,1-Dichloroethane	1.8
Isophorone	32	Acrylonitrile	1.4
Trichloroethene	28	Methylene chloride	1.3
Thymine*	27	Acrolein	1.2
Toluene	26	Cytosine*	1.1
5-Chlorouracil*	25		
N-Nitrosodi-n-propylamine	24	Benzene	1.0
bis(2-Chloroisopropyl) ether	24	Ethylenediaminetetra- acetic acid	0.86
Phenol	21	Benzoic acid	0.76
		Chloroethane	0.59
		N-Dimethylnitros- amine	6.8 x 10 ⁻⁵

TABLE 3. SUMMARY OF CARBON ADSORPTION CAPACITIES (cont.)

NOT ADSORBED

Acetone cyanohydrin	Adipic acid
Butylamine	Choline chloride
Cyclohexylamine	Diethylene glycol
Ethanol	Hexamethylenediamine
Hydroquinone	Morpholine
	Triethanolamine

*Compounds prepared in "mineralized" distilled water containing the following composition:


<u>Ion</u>	<u>Conc., mg/l</u>	<u>Ion</u>	<u>Conc., mg/l</u>
Na ⁺	92	PO ₄ ⁼	10
K ⁺	12.6	SO ₄ ⁼	100
Ca ⁺⁺	100	Cl ⁻	177
Mg ⁺⁺	25.3	Alkalinity	200

- (a) Adsorption capacities are calculated for an equilibrium concentration of 1.0 mg/l at neutral pH.

SECTION 7
ISOTHERMS FOR INDIVIDUAL COMPOUNDS

COMPOUND: Acenaphthene

STRUCTURE:



FORMULA: $C_{12}H_{10}$ **MOL. WT.** 154.21

FREUNDLICH PARAMETERS	pH		
	5.3		
K.	190		
1/n	0.36		
Corr. Coef. r	0.82		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	190		
0.1	84		
0.01	37.0		
0.001	16		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

GRANULAR CARBON COLUMN

C_o , mg/l	0.1	0.01	0.001
1.0	10	30	60
0.1		2.4	6.1
0.01			0.6


C_o , mg/l	
1.0	5.2
0.1	1.2
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 226 nm.

REMARKS:


COMPOUND: Acenaphthene

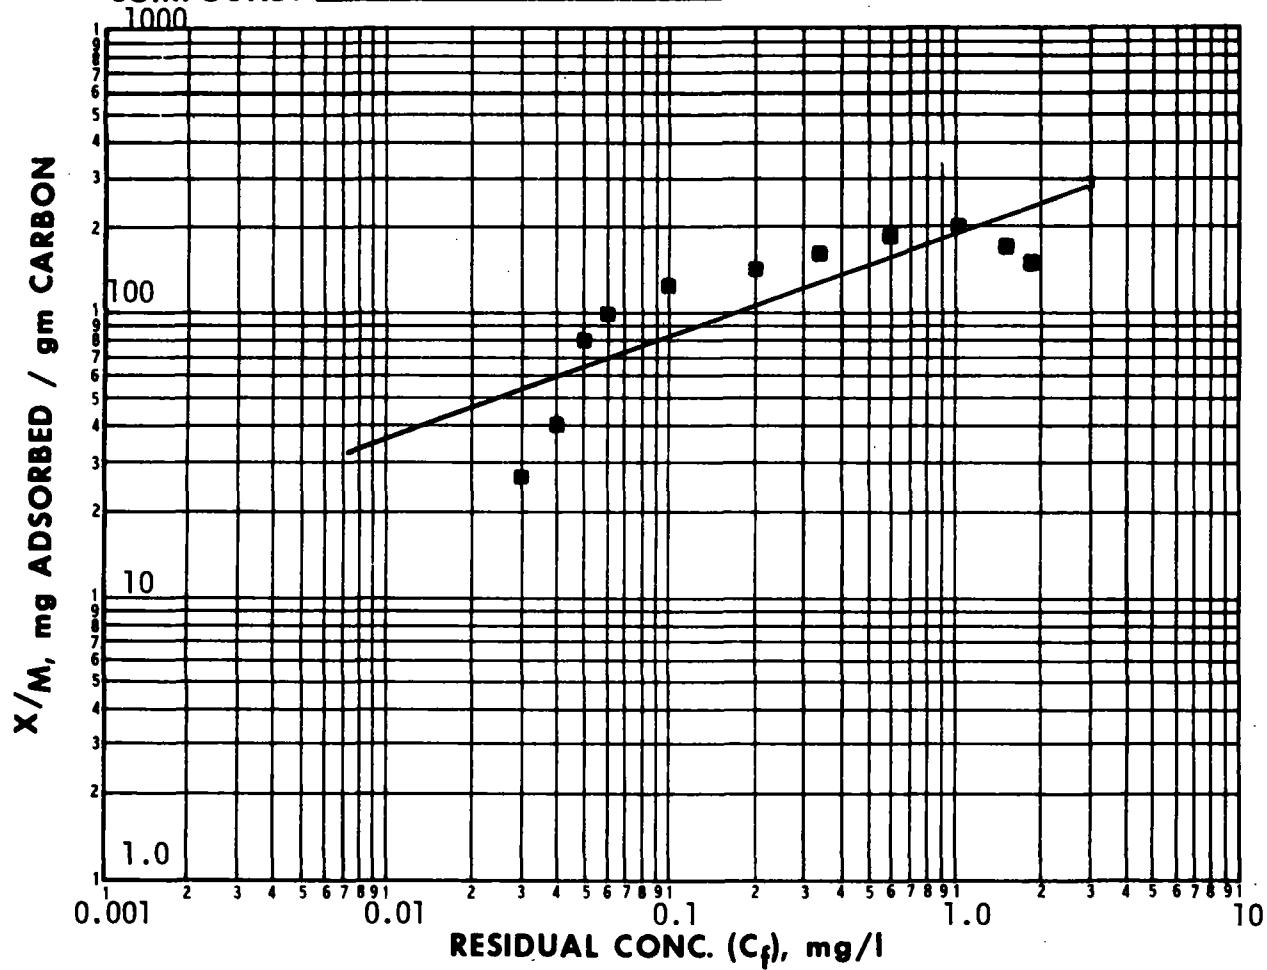

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\blacksquare \text{ pH} =$			$\blacksquare \text{ pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	2.04								
1.0	1.88	0.16	160						
2.5	1.60	0.44	176						
5.0	1.04	1.00	200						
7.5	0.60	1.44	192						
10	0.33	1.71	171						
12.5	0.20	1.84	147						
15	0.10	1.94	129						
20	0.06	1.98	99						
25	0.05	1.99	80						
50	0.04	2.00	40						
75	0.03	2.01	27						

COMPOUND: Acenaphthylene

STRUCTURE:



FORMULA: $C_{12}H_8$

MOL. WT. 152.21

FREUNDLICH PARAMETERS	pH		
	5.3		
K	115		
1/n	0.37		
Corr. Coef. r	0.90		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	115		
0.1	49		
0.01	21		
0.001	9.0		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	18	47	110
0.1		4.3	11
0.01			1.0

GRANULAR CARBON COLUMN


C_o , mg/l	
1.0	8.7
0.1	2.0
0.01	0.5

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.


REMARKS:

COMPOUND: Acenaphthylene

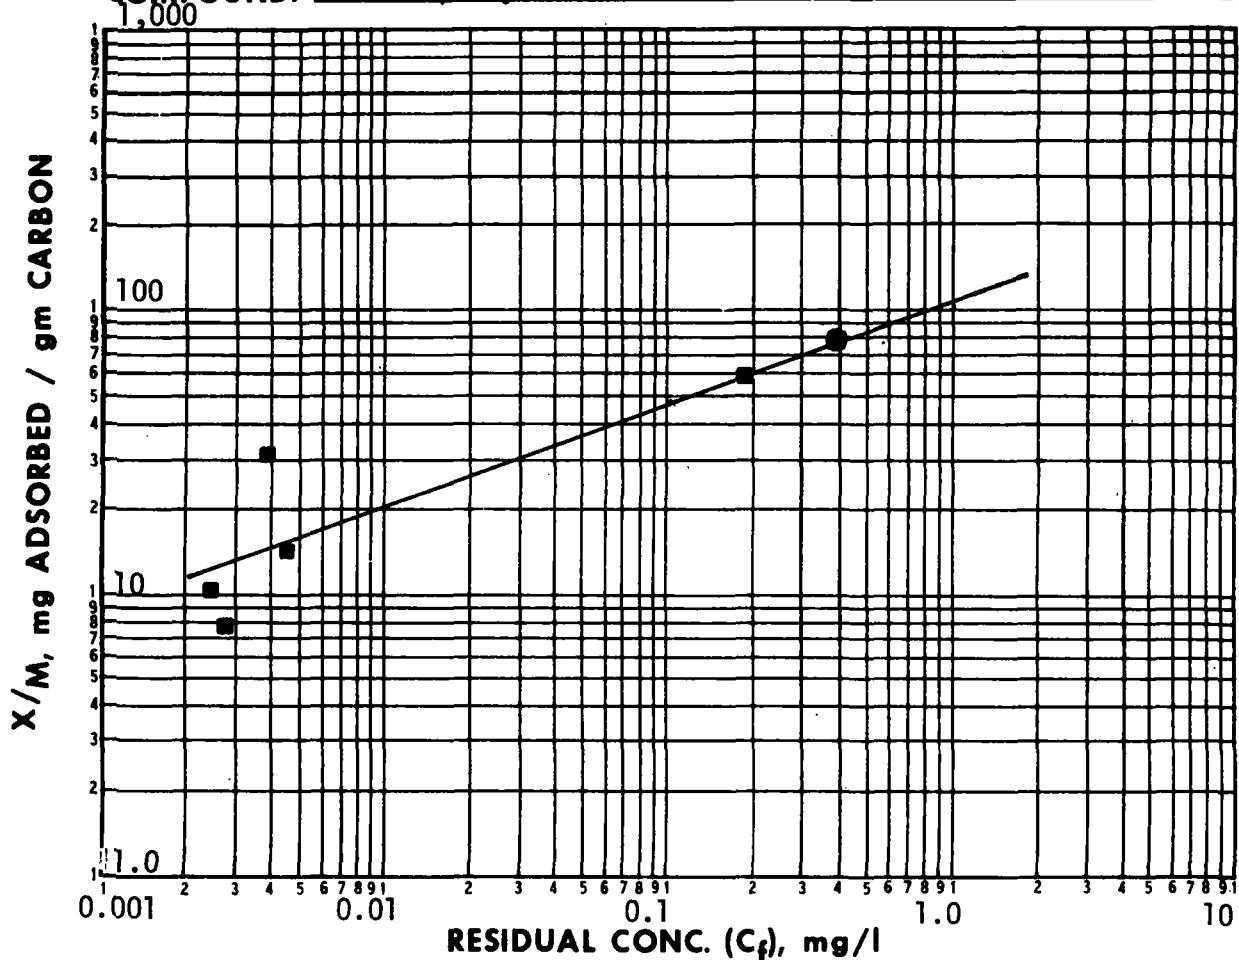

COMPOUND: Acetone cyanohydrin

STRUCTURE:

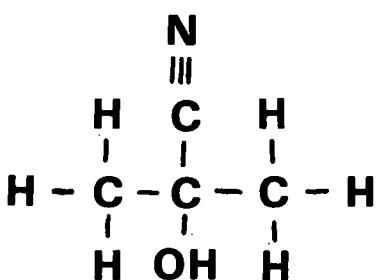

FORMULA: $\text{C}_4\text{H}_7\text{NO}$

MOL. WT. 85.11

FREUNDLICH PARAMETERS	pH		
K			
1/n			
Corr. Coef. r			
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l


C_o , mg/l				C_o , mg/l	

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS: Not adsorbed


COMPOUND: Acetone cyanohydrin

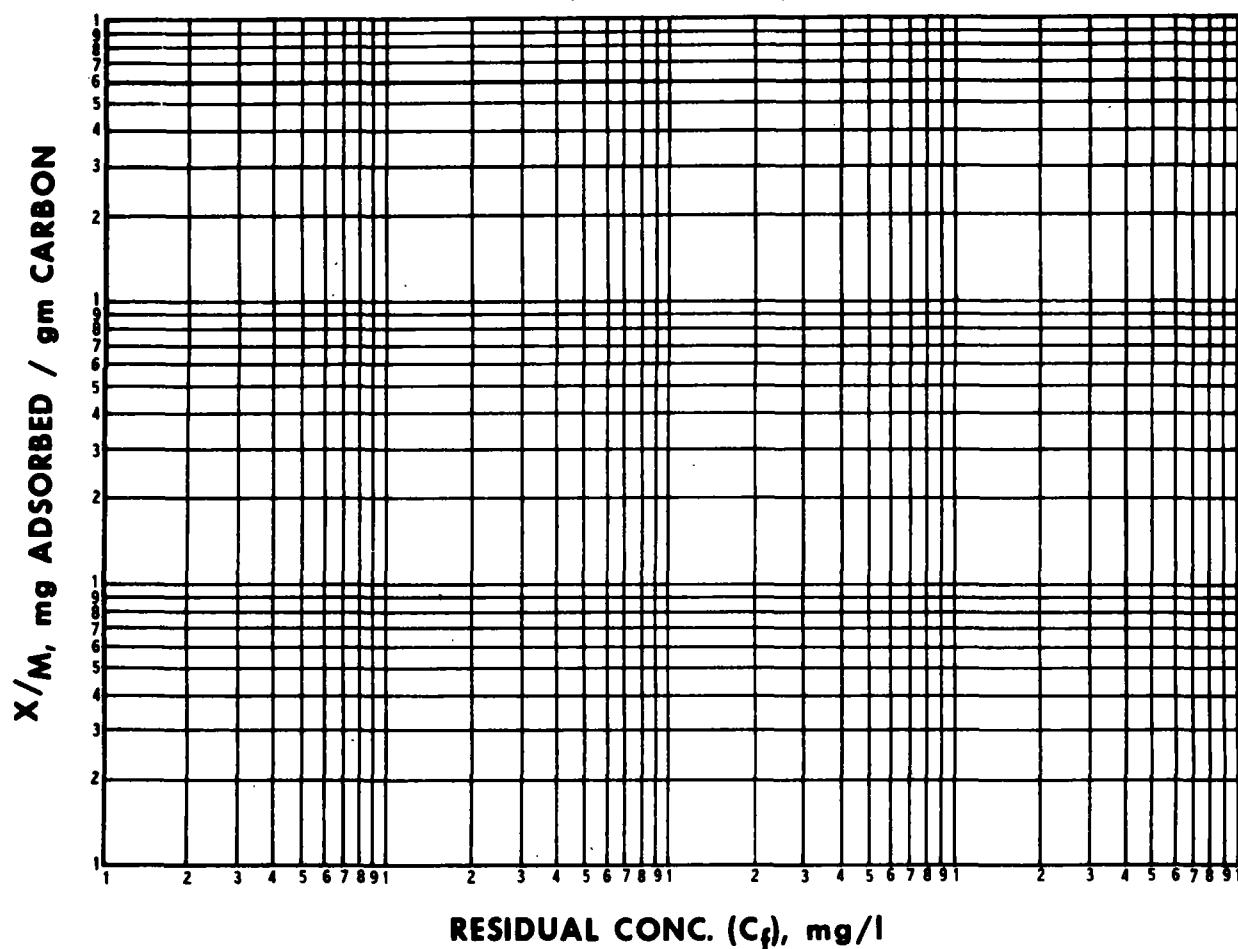

CARBON DOSE mg/l	pH= 3.01			pH= 7.03			pH= 8.97		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	11.4			10.2			11.8		
5	11.0			9.4			10.2		
10	17.2			9.2			10.0		
25	13.4			10.2			8.6		
50	16.2			14.4			9.0		
100	20.5			12.6			8.6		
150	13.0			9.8			8.8		
200	10.6			9.0			9.4		

COMPOUND: Acetophenone

STRUCTURE:



C₈H₈O

FORMULA: _____ **MOL. WT.** 120.14

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	74		
1/n	0.44		
Corr. Coef. r	0.97		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	200		
1.0	74		
0.1	27		
0.01	9.8		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	34	100	230
0.1		9.2	28
0.01			2.5


C ₀ , mg/l	
1.0	14
0.1	3.7
0.01	1.0

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 244 nm

REMARKS:


COMPOUND: Acetophenone

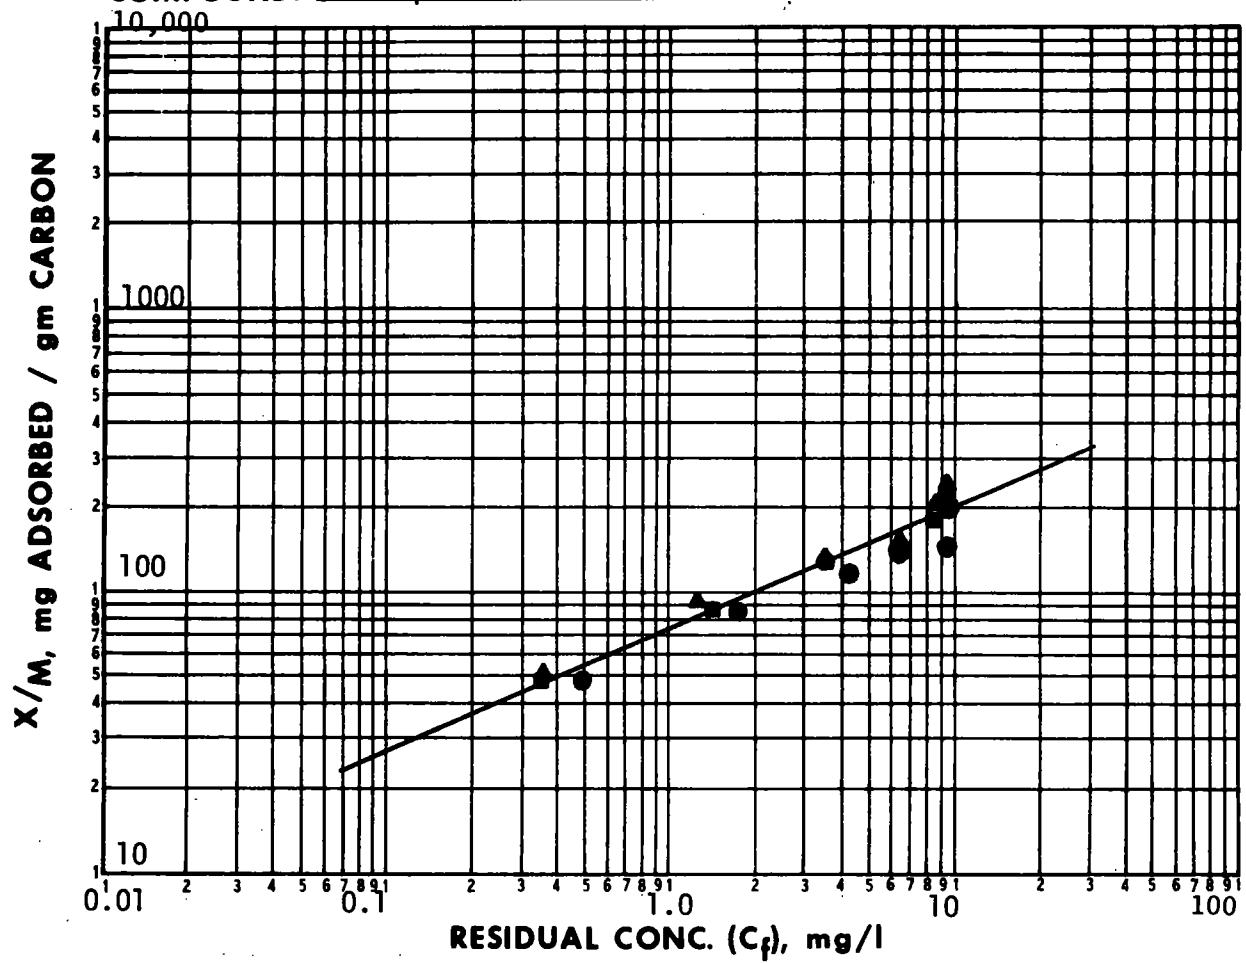

CARBON DOSE mg/l	$\bullet \text{ pH} = 3.0$			$\blacksquare \text{ pH} = 7.0$			$\blacktriangle \text{ pH} = 9.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	10.30			10.20			10.50		
2.5	9.80	0.50	200						
5	9.50	0.80	160	9.10	1.10	220	9.25	1.25	250
10				8.35	1.85	185	8.45	2.05	205
25	6.58	3.72	149	6.33	3.87	154	6.30	4.20	168
50	4.15	6.15	123	3.65	6.55	131	3.48	7.02	140
100	1.82	8.48	85	1.52	8.68	87	1.30	9.20	92
200	0.50	9.80	49	0.36	9.84	49	0.36	10.14	51

COMPOUND: 2-Acetylaminofluorene

STRUCTURE:

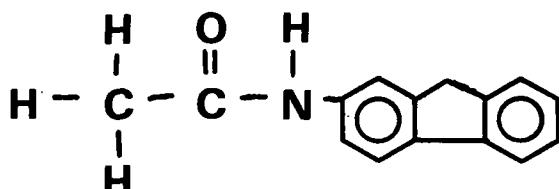

FORMULA: C₁₅H₁₃NO

MOL. WT. 222.28

FREUNDLICH PARAMETERS	pH		
	7.1		
K	318		
1/n	0.12		
Corr. Coef. r	0.94		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	318		
0.1	240		
0.01	180		
0.001	140		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	3.7	5.4	7.2
0.1		0.5	0.7
0.01			0.06


C ₀ , mg/l	
1.0	3.1
0.1	0.42
0.01	0.06

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 270 nm

REMARKS: OSHA regulated carcinogen


COMPOUND: 2-Acetylaminofluorene

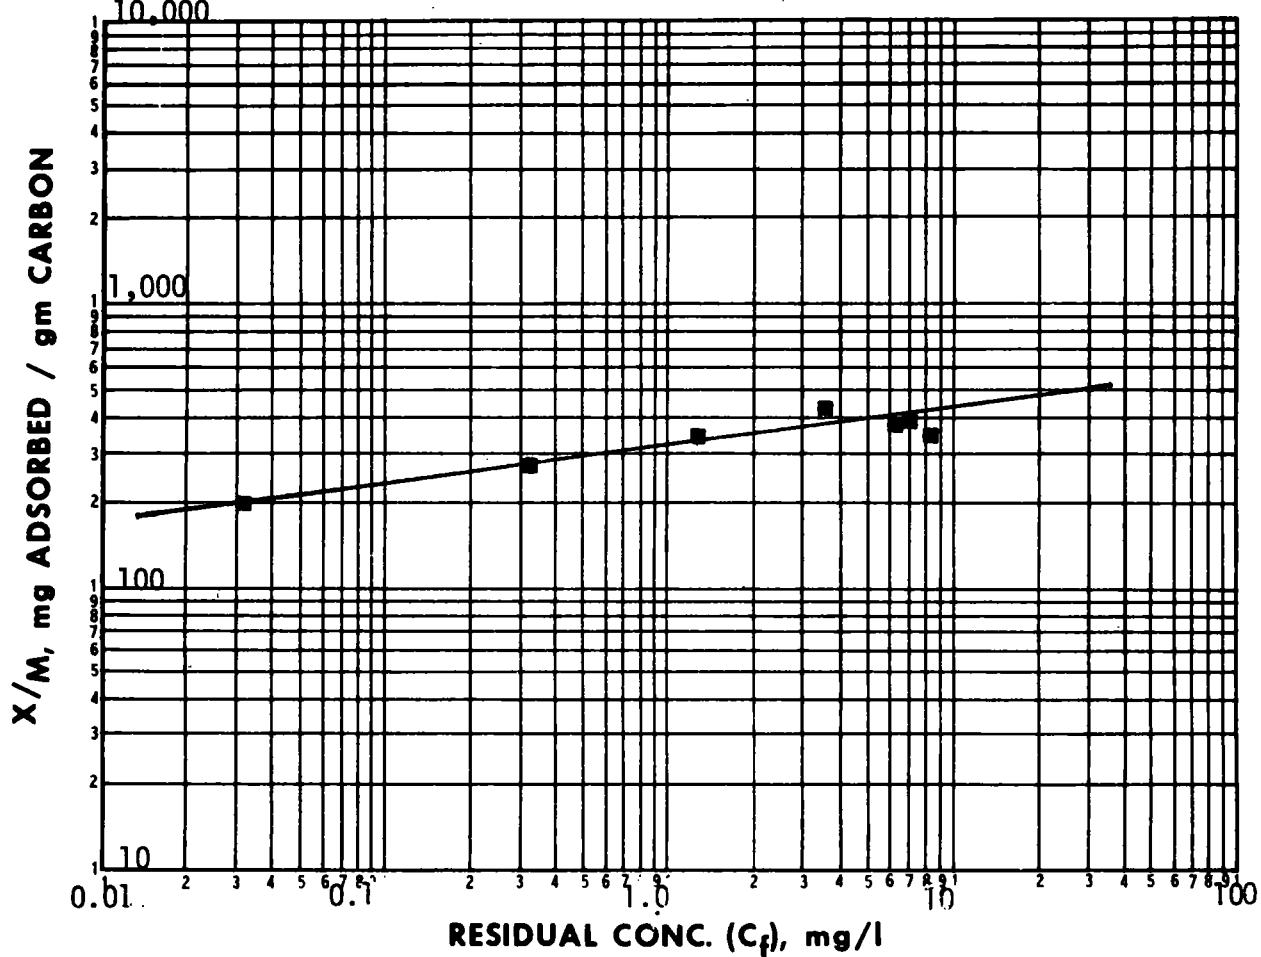

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 7.1$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	10.02								
5	8.20	1.82	364						
7.5	7.05	2.97	396						
10	6.20	3.82	382						
15	3.55	6.47	431						
25	1.28	8.74	350						
35	0.32	9.70	277						
50	0.032	9.99	200						

COMPOUND: Acridine orange

STRUCTURE:

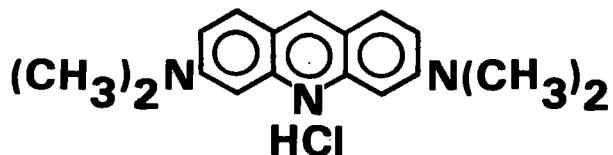

FORMULA: $\text{C}_{17}\text{H}_{19}\text{N}_3 \cdot \text{HCl}$ **MOL. WT.** 301.82

FREUNDLICH PARAMETERS	pH	
	pH 3 and 7 pooled	9.0
K	180	210
1/n	0.29	0.38
Corr. Coef. r	0.97	0.99
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm	
10	350	500
1.0	180	210
0.1	91	88
0.01	46	37

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	9.9	21	42
0.1		1.9	4.2
0.01			0.38


C_o , mg/l	
1.0	5.6
0.1	1.1
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Visible Spectroscopy 492 nm

REMARKS:


COMPOUND: Acridine orange

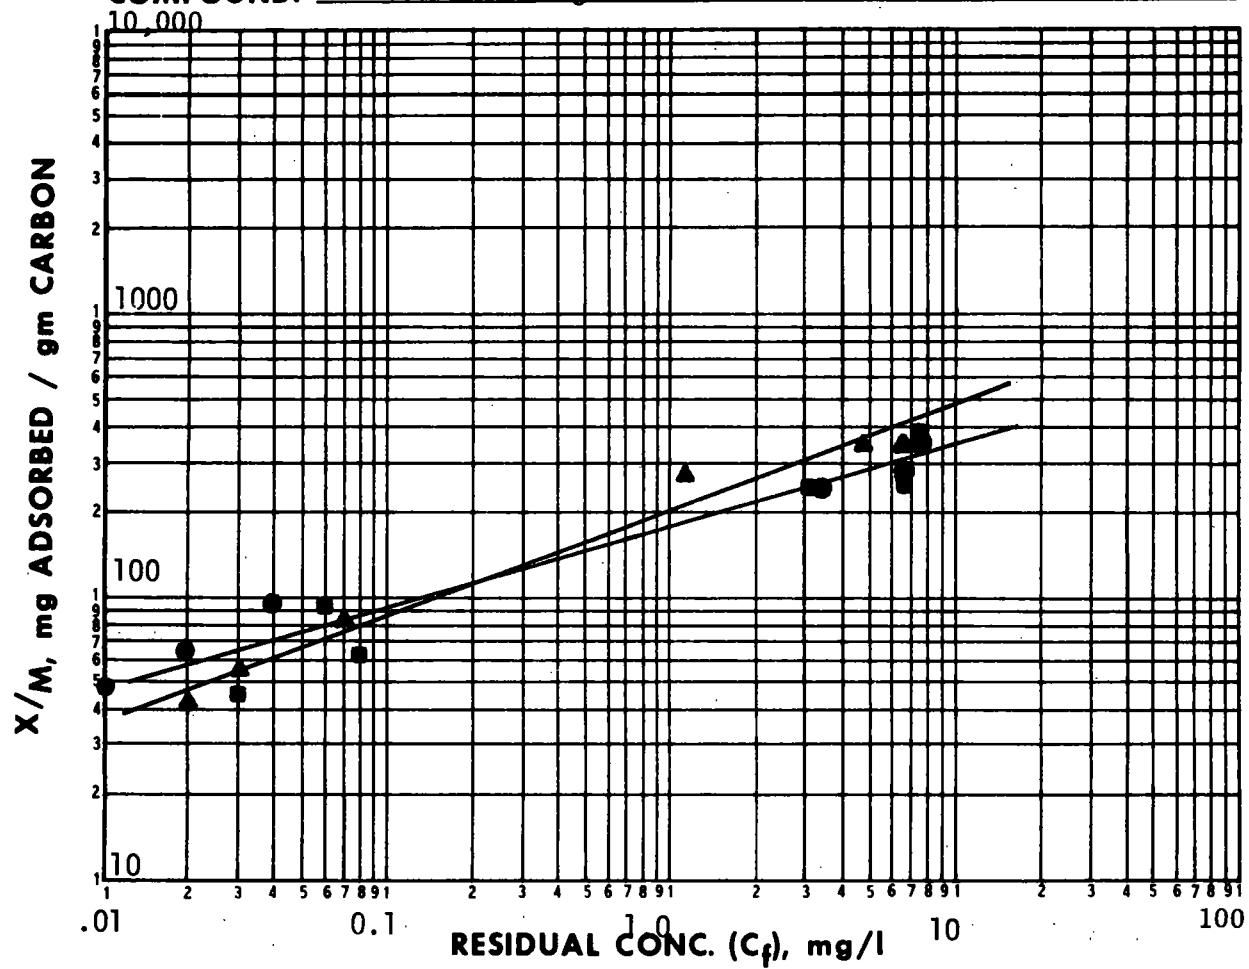

CARBON DOSE mg/l	● pH= 3.0			■ pH= 7.0			▲ pH= 9.0		
	C_f	C_o-C_f=X	X/M	C_f	C_o-C_f=X	X/M	C_f	C_o-C_f=X	X/M
0	9.59			9.29			8.36		
5	7.78	1.81	362	7.35	1.94	388	6.56	1.80	360
10	6.71	2.88	288	6.74	2.55	255	4.74	3.62	362
25	3.38	6.21	248	3.14	6.15	246	1.22	7.14	286
100	0.04	9.55	96	0.06	9.23	92	0.07	8.29	83
150	0.02	9.57	64	0.08	9.21	61	0.03	8.33	56
200	0.01	9.58	48	0.03	9.26	46	0.02	8.34	42

COMPOUND: Acridine yellow

STRUCTURE:

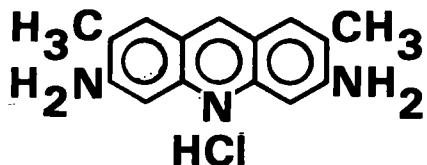

FORMULA: $\text{C}_{15}\text{H}_{15}\text{N}_3 \cdot \text{HCl}$

MOL. WT. 273.77

FREUNDLICH PARAMETERS	pH	
	3.0	pH 7 and 9 pooled
K	210	230
1/n	0.14	0.12
Corr. Coef. r	0.72	0.88
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm	
10	290	300
1.0	210	230
0.1	150	180
0.01	110	135

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

GRANULAR CARBON COLUMN

C_0 , mg/l	0.1	0.01	0.001
1.0	5.1	7.4	9.9
0.1		0.67	0.98
0.01			0.09


C_0 , mg/l
1.0
0.1
0.01

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 264 nm

REMARKS:


COMPOUND: Acridine yellow

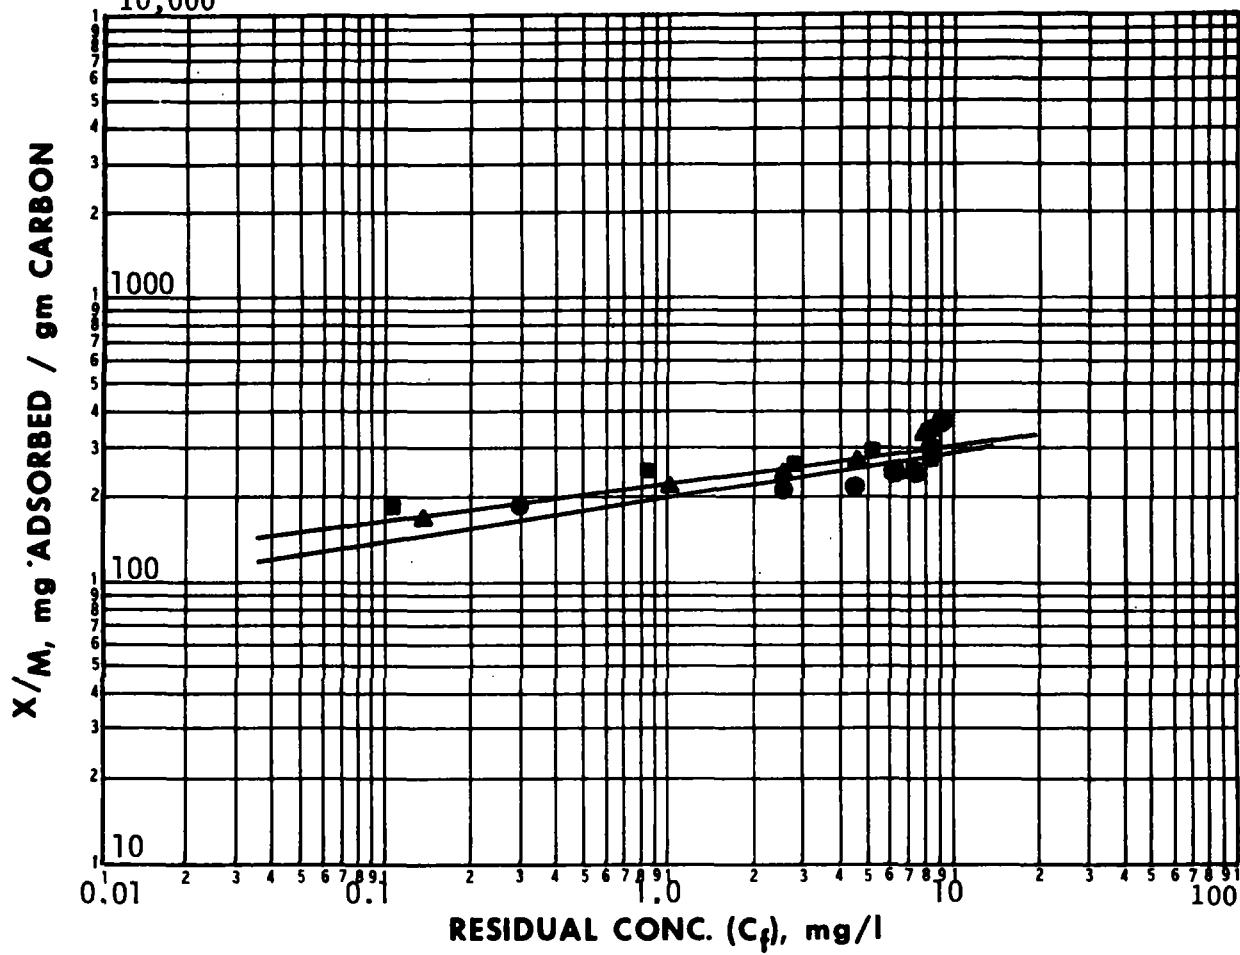

CARBON DOSE mg/l	● pH = 3.0			■ pH = 7.0			▲ pH = 9.0		
	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0	10.01			9.54			8.82		
2.5	9.06	0.95	380	8.67	0.87	348	7.97	0.85	340
5	8.51	1.50	300	8.17	1.37	274			
10	7.49	2.52	252	7.08	2.46	246	6.25	2.57	257
15	6.16	3.85	257	5.06	4.48	299	4.61	4.21	281
25	4.55	5.46	218	2.84	6.70	268	2.60	6.22	249
35	2.72	7.29	208	0.83	8.71	248	1.01	7.81	223
50	0.30	9.71	194	0.11	9.43	188	0.14	8.68	173

COMPOUND: Acrolein

STRUCTURE:



FORMULA: C₃H₄O

MOL. WT. 56.06

FREUNDLICH PARAMETERS	pH		
	5.2		
K	1.2		
1/n	0.65		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	5.2		
1.0	1.2		
0.1	0.26		
0.01	0.06		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l


C ₀ , mg/l	0.1	0.01	0.001
1.0	3,500	17,000	76,800
0.1		1,500	7,600
0.01			690

C ₀ , mg/l	
1.0	860
0.1	380
0.01	170

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Carbon


REMARKS:

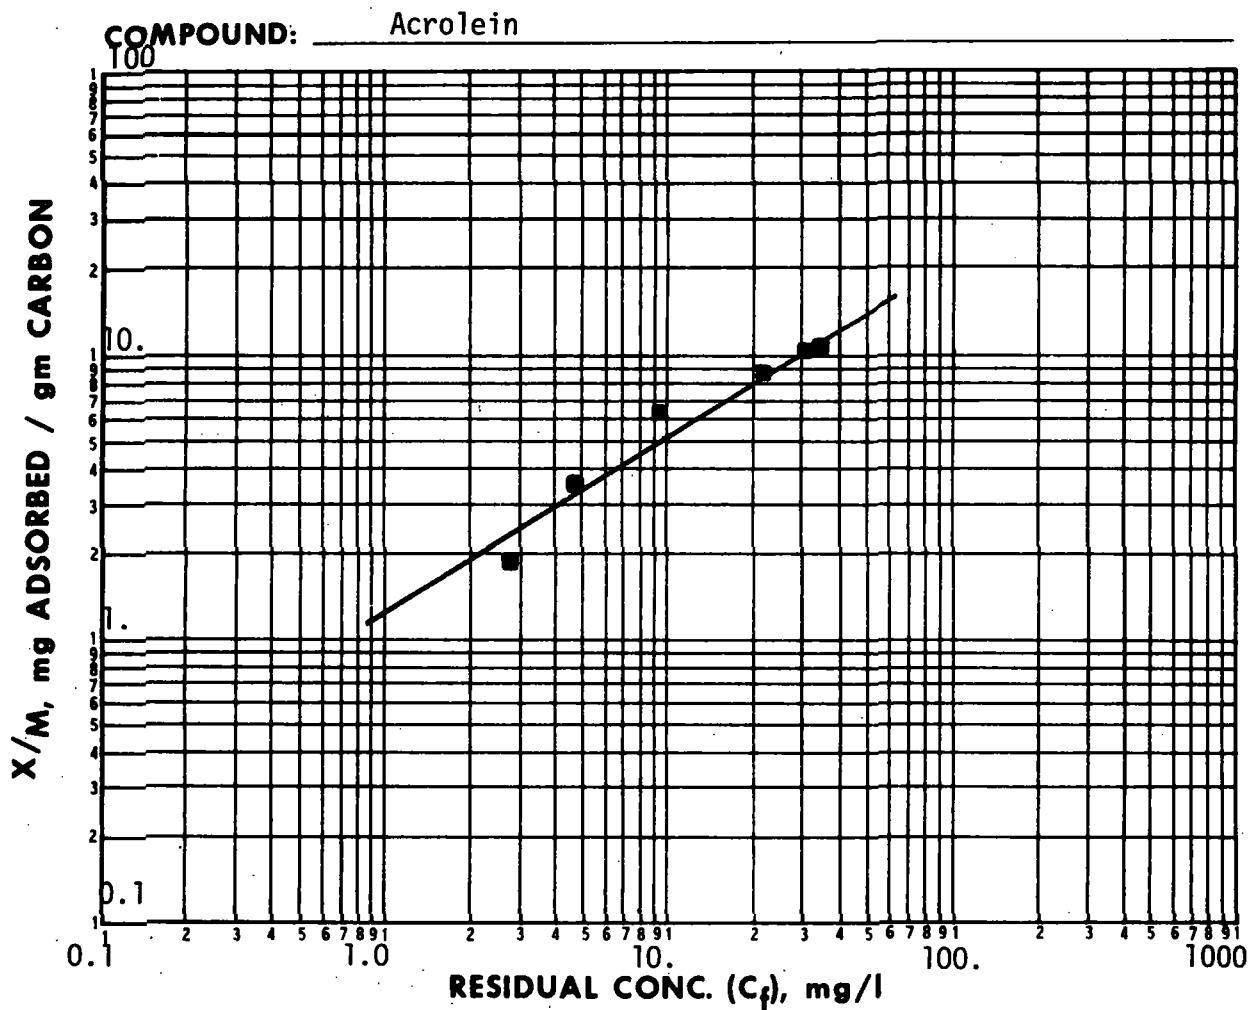

CARBON DOSE mg/l	$\bullet \text{ pH} = 5.2$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	40.33								
500	34.98	5.35	10.70						
1,000	30.30	10.03	10.03						
2,000	22.41	17.92	8.96						
5,000	9.58	30.75	6.15						
10,000	4.77	35.56	3.56						
20,000	2.76	37.57	1.88						

COMPOUND: Acrylonitrile

STRUCTURE:



FORMULA: $\text{C}_3\text{H}_3\text{N}$

MOL. WT. 53.06

FREUNDLICH PARAMETERS	pH		
	5.8		
K	1.4		
1/n	0.51		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1	1.4		
0.1	0.42		
0.01	0.13		
0.001	0.04		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	2,200	7,700	25,000
0.1		700	2,500
0.01			230

GRANULAR CARBON COLUMN


C_o , mg/l	
1.0	710
0.1	240
0.01	80

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Carbon

REMARKS:


COMPOUND: Acrylonitrile

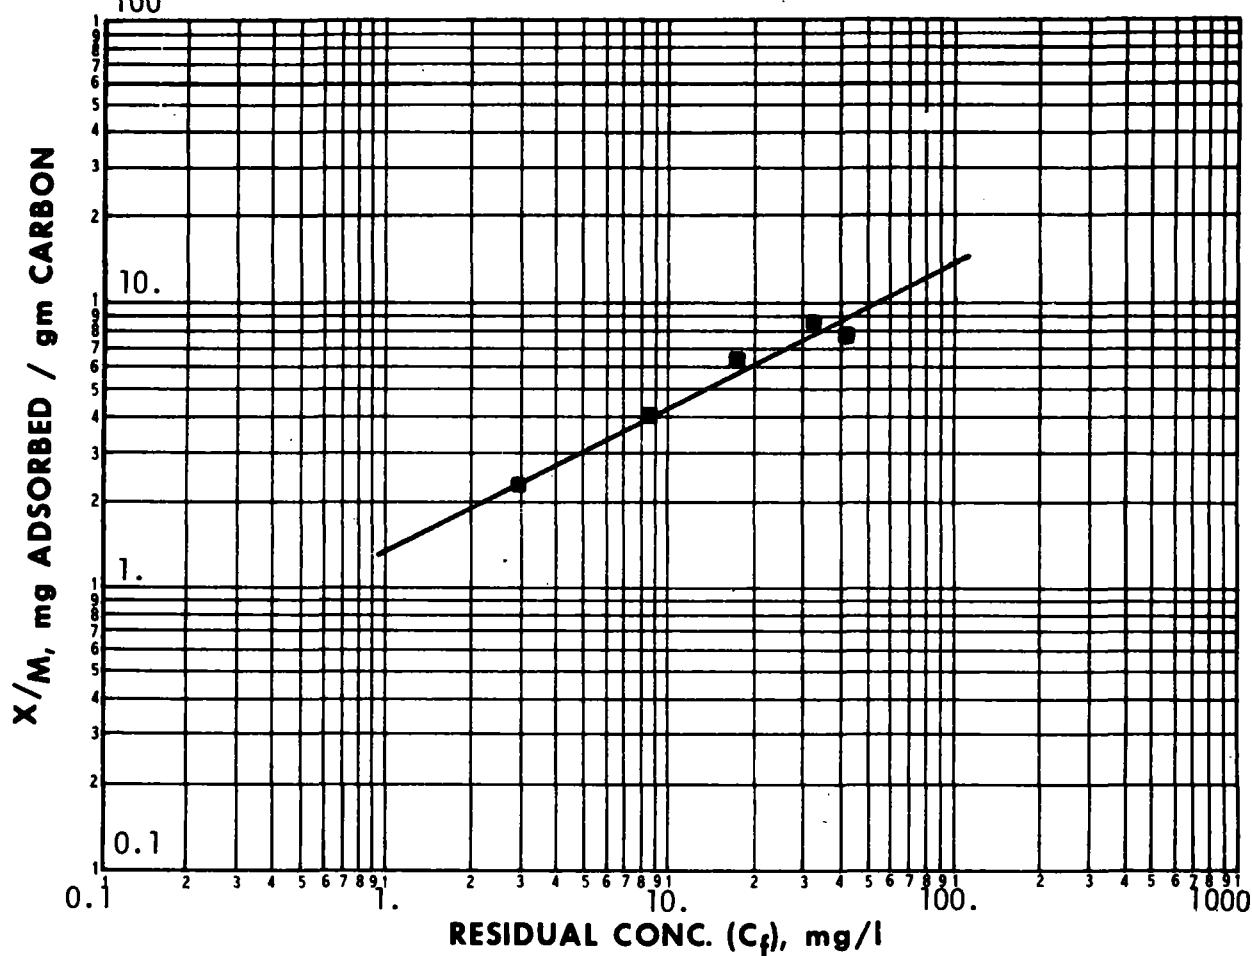

CARBON DOSE mg/l	$\bullet \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	48.70								
1,000	40.85	7.85	7.85						
2,000	31.77	16.93	8.47						
5,000	17.86	30.84	6.17						
10,000	8.68	40.02	4.00						
20,000	2.98	45.72	2.29						

COMPOUND: Adenine

STRUCTURE:



FORMULA: C₅H₅N₅ **MOL. WT.** 135.13

FREUNDLICH PARAMETERS	pH	
	3.0	pH 7 and 9 pooled
K	38	71
1/n	0.38	0.38
Corr. Coef. r	0.97	0.96
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm	
10	91	170
1.0	38	71
0.1	16	30
0.01	6.5	12

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C _o , mg/l	0.1	0.01	0.001
1.0	30	80	190
0.1		7.3	19
0.01			1.7


C _o , mg/l	
1.0	14
0.1	3.4
0.01	0.8

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 261 nm

REMARKS:


COMPOUND: Adenine

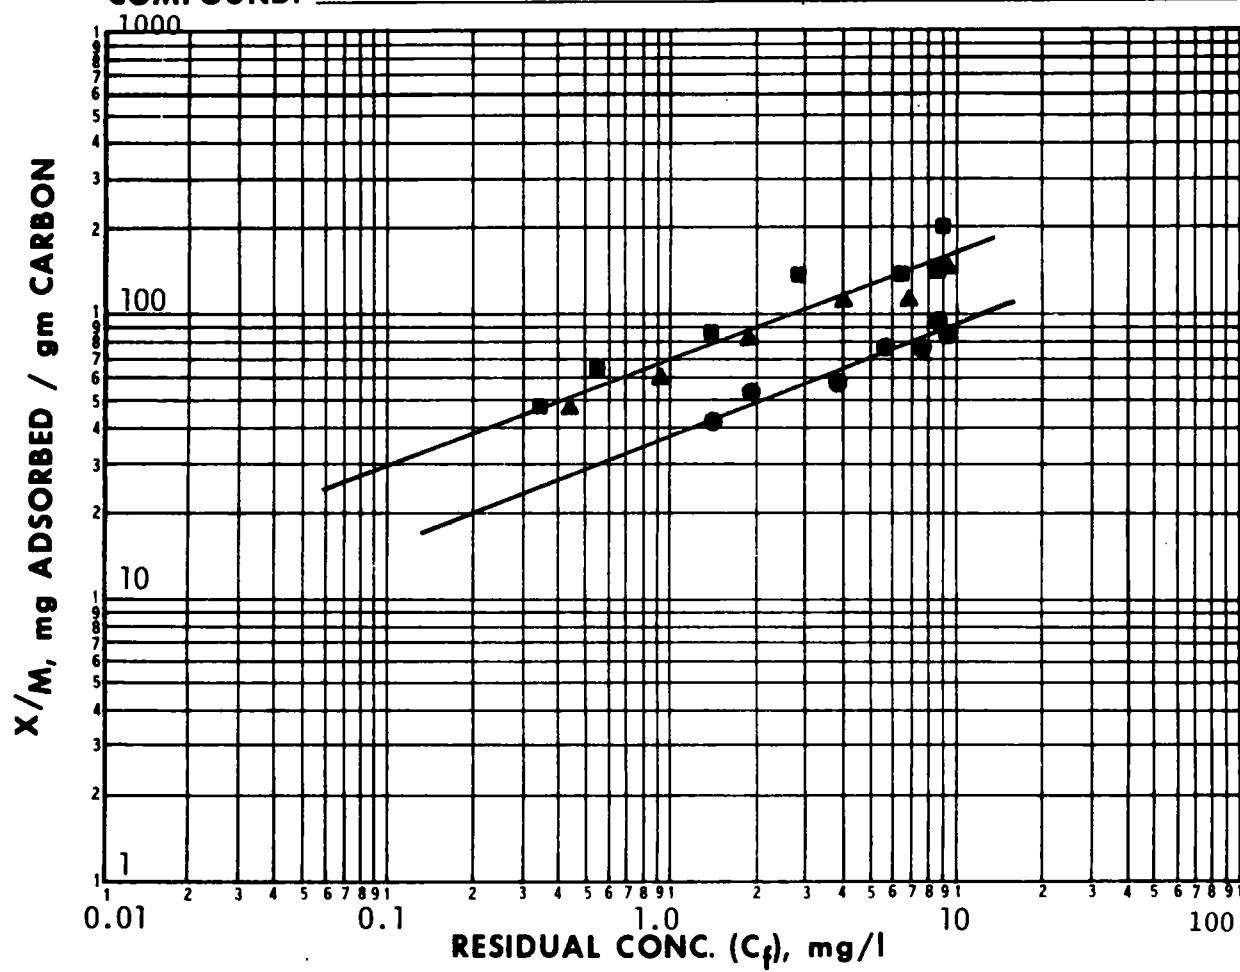

CARBON DOSE mg/l	● pH = 3.0			■ pH = 7.0			▲ pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	9.88			10.00			9.94		
5	9.45	0.43	86	9.00	1.00	200	9.14	0.80	160
10	8.94	0.94	94	8.42	1.58	158	8.42	1.52	152
25	7.92	1.96	78	6.41	3.59	144	6.91	3.03	121
50	5.93	3.95	79	2.91	7.09	142	4.00	5.94	119
100	3.98	5.90	59	1.42	8.58	86	1.89	8.05	81
150	1.97	7.91	53	0.55	9.45	63	0.91	9.03	60
200	1.50	8.38	42	0.34	9.66	48	0.43	9.51	48

COMPOUND: Adipic acid

STRUCTURE:



FORMULA: $\text{C}_6\text{H}_{10}\text{O}_4$

MOL. WT. 146.14

FREUNDLICH PARAMETERS	pH		
	3.0		
K	20		
1/n	0.47		
Corr. Coef. r	0.60		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	59		
1.0	20		
0.1	6.9		
0.01	2.4		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	130	430	1300
0.1		39	130
0.01			12


C_o , mg/l	
1.0	50
0.1	15
0.01	4.2

(a) Carbon doses in mg/l at pH. 3

ANALYTICAL METHOD: Total Organic Carbon

REMARKS:


COMPOUND: Adipic Acid

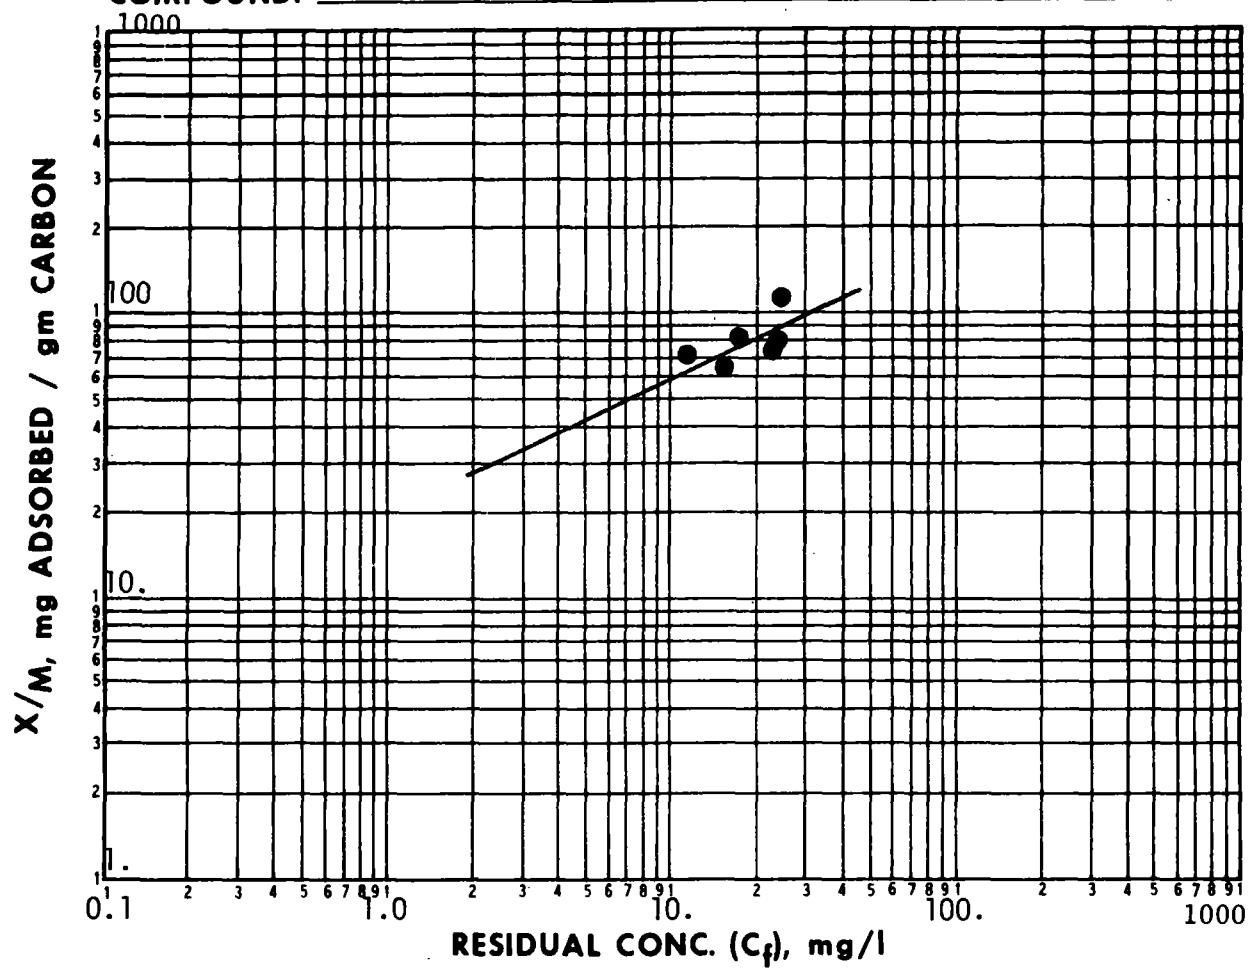

CARBON DOSE mg/l	pH = 3.0			pH = 7.00			pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	26.4			26.4			26		
10	25.2	1.20	120	27.2			24		
25	24.4	2.00	80	25.2			25.6		
50	22.7	3.70	74	24.0			24.8		
100	18.3	8.10	81	25.2			24.4		
150	16.7	9.70	64.7	21.6			24.4		
200	12.2	14.2	71	23.6			22.8		

COMPOUND: Aldrin

STRUCTURE:

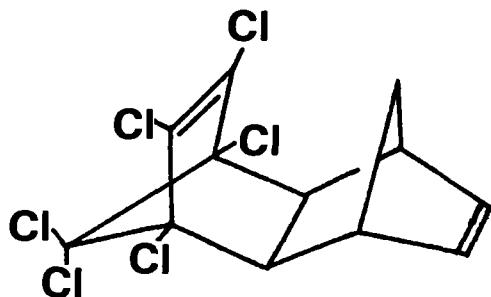

FORMULA: $C_{12}H_8Cl_6$ MOL. WT. 365.0

FREUNDLICH PARAMETERS	pH		
	5.3		
K	651		
1/n	0.92		
Corr. Coef. r	0.97		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	651		
0.1	79		
0.01	9.5		
0.001	1.2		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

C_f , mg/l

GRANULAR CARBON COLUMN


C_o , mg/l	0.1	0.01	0.001
1.0	11	110	880
0.1		9.7	88
0.01			8.0

C_o , mg/l	
1.0	1.5
0.1	1.3
0.01	1.1

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent extraction - G.C.


REMARKS:

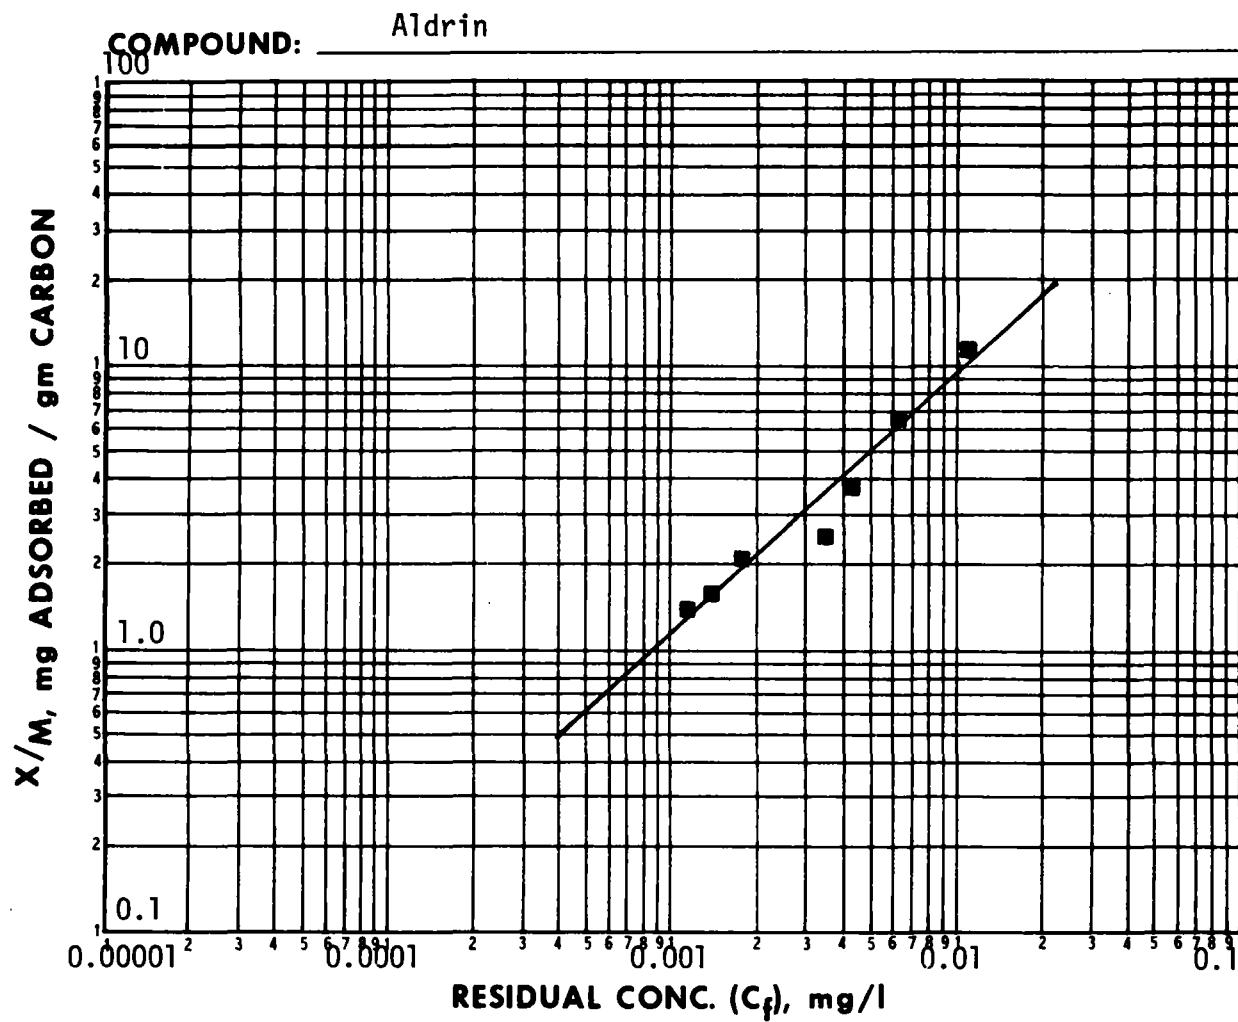

CARBON DOSE mg/l	$\bullet \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.023								
1.0	0.011	0.012	12.0						
2.5	0.0061	0.0169	6.76						
5	0.0042	0.0188	3.76						
7.5	0.0035	0.0195	2.60						
10	0.0018	0.0212	2.12						
12.5	0.0014	0.0216	1.73						
15	0.0012	0.0218	1.45						

COMPOUND: 4-Aminobiphenyl

STRUCTURE:



FORMULA: $\text{C}_{12}\text{H}_{11}\text{N}$ **MOL. WT.** 169.12

FREUNDLICH PARAMETERS	pH		
	7.2		
K	200		
1/n	0.26		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	360		
1.0	200		
0.1	110		
0.01	61		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON **GRANULAR CARBON COLUMN**
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	8.2	16	30
0.1		1.5	3.0
0.01			0.3


C_o , mg/l	
1.0	5.1
0.1	1.0
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 273 nm

REMARKS: OSHA regulated carcinogen


COMPOUND: 4-Aminobiphenyl

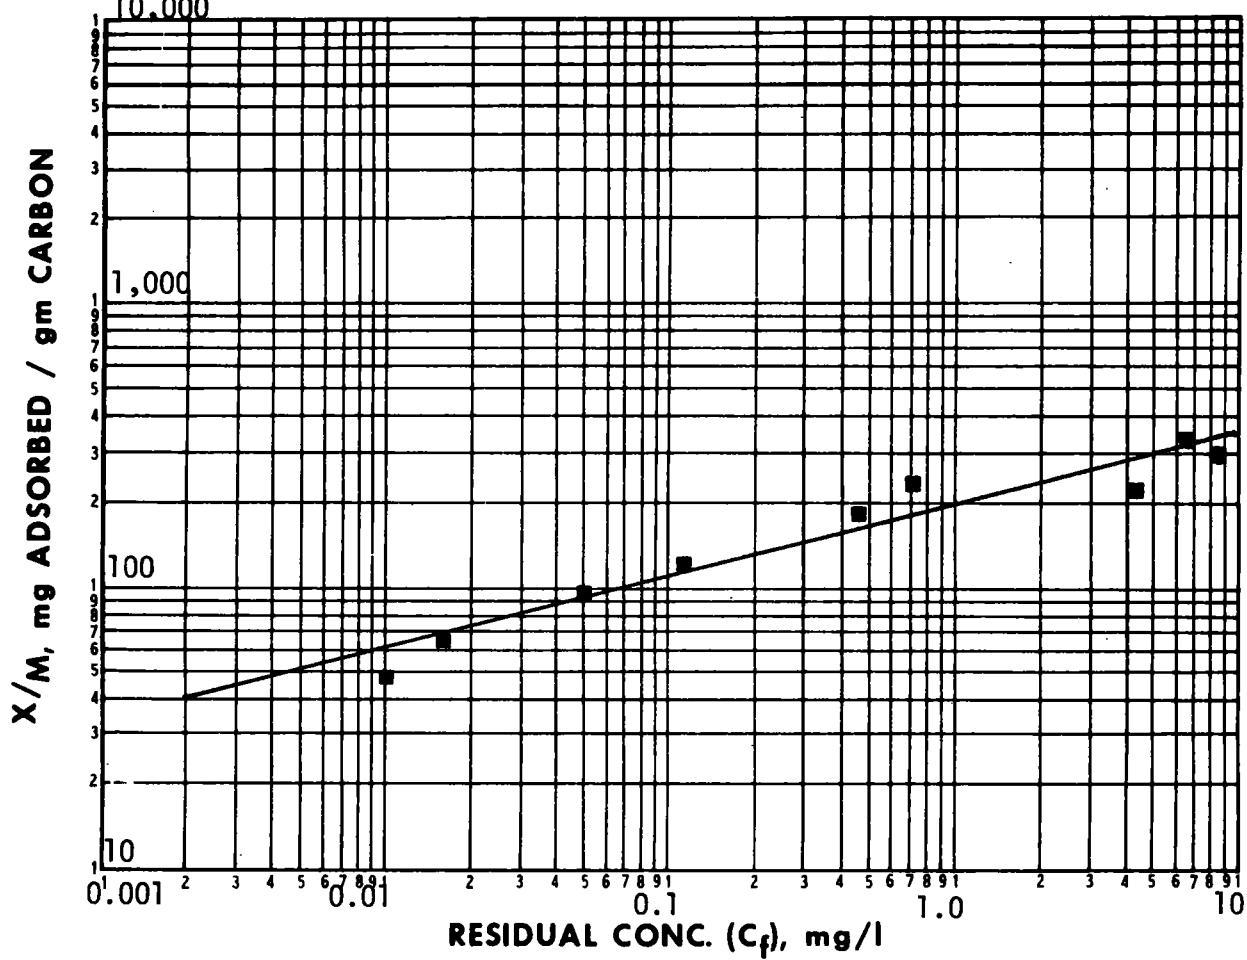

	■ pH = 7.2			pH =			pH =		
CARBON DOSE mg/l	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0	9.80								
5	8.30	1.50	300						
10	6.50	3.30	330						
25	4.20	5.60	224						
37.5	0.70	9.10	243						
50	0.46	9.34	187						
75	0.115	9.69	129						
100	0.05	9.75	98						
150	0.017	9.783	65						
200	0.010	9.79	49						

COMPOUND: Anethole

STRUCTURE:

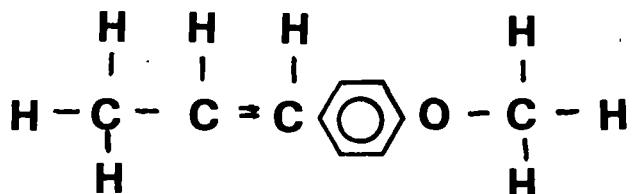

FORMULA: $C_{10}H_{12}O$ MOL. WT. 148

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	300		
1/n	0.42		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	780		
1.0	300		
0.1	110		
0.01	43		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	8.0	23	61
0.1		2.1	6.1
0.01			0.55

GRANULAR CARBON COLUMN


C_o , mg/l	
1.0	3.4
0.1	0.9
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 256 nm

REMARKS:


COMPOUND: Anethole

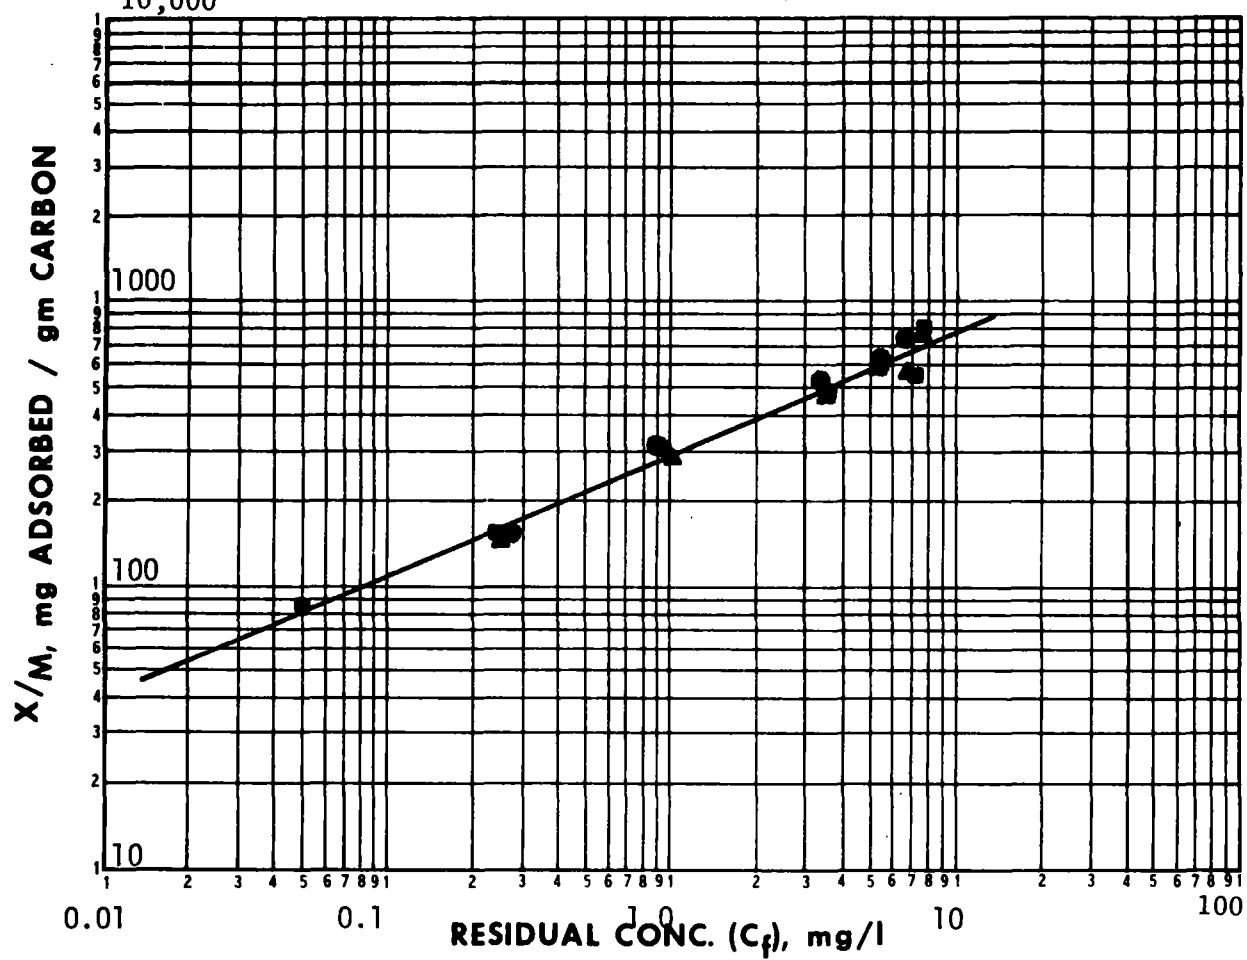

CARBON DOSE mg/l	$\bullet \text{pH} = 3.0$			$\blacksquare \text{pH} = 7.0$			$\blacktriangle \text{pH} = 9.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	8.60			8.55			8.23		
1.0				7.75	0.80	800	7.45	0.78	780
2.5	6.78	1.82	728	7.17	1.38	552	6.78	1.45	580
5.0	5.47	3.13	626	5.55	3.00	600	5.25	2.98	596
10	3.37	5.23	523	3.70	4.85	485	3.50	4.73	473
25	0.90	7.70	308	0.95	7.60	304	1.03	7.20	288
50	0.28	8.32	166	0.23	8.32	166	0.25	7.98	160
100				0.05	8.50	85			

COMPOUND: O-Anisidine

STRUCTURE:



FORMULA: C₇H₉NO MOL. WT. 123.15

FREUNDLICH PARAMETERS	pH	
	3.0	pH 7 and 9 pooled
K	20	50
1/n	0.41	0.34
Corr. Coef. r	0.99	0.99
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm	
10	52	110
1.0	20	50
0.1	7.8	23
0.01	3.0	10

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

C_f, mg/l

C _o , mg/l	0.1	0.01	0.001
1.0	39	95	210
0.1		8.6	21
0.01			1.9

GRANULAR CARBON COLUMN


C _o , mg/l	
1.0	20
0.1	4.4
0.01	1.0

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 232 nm

REMARKS:

COMPOUND: 0-Anisidine

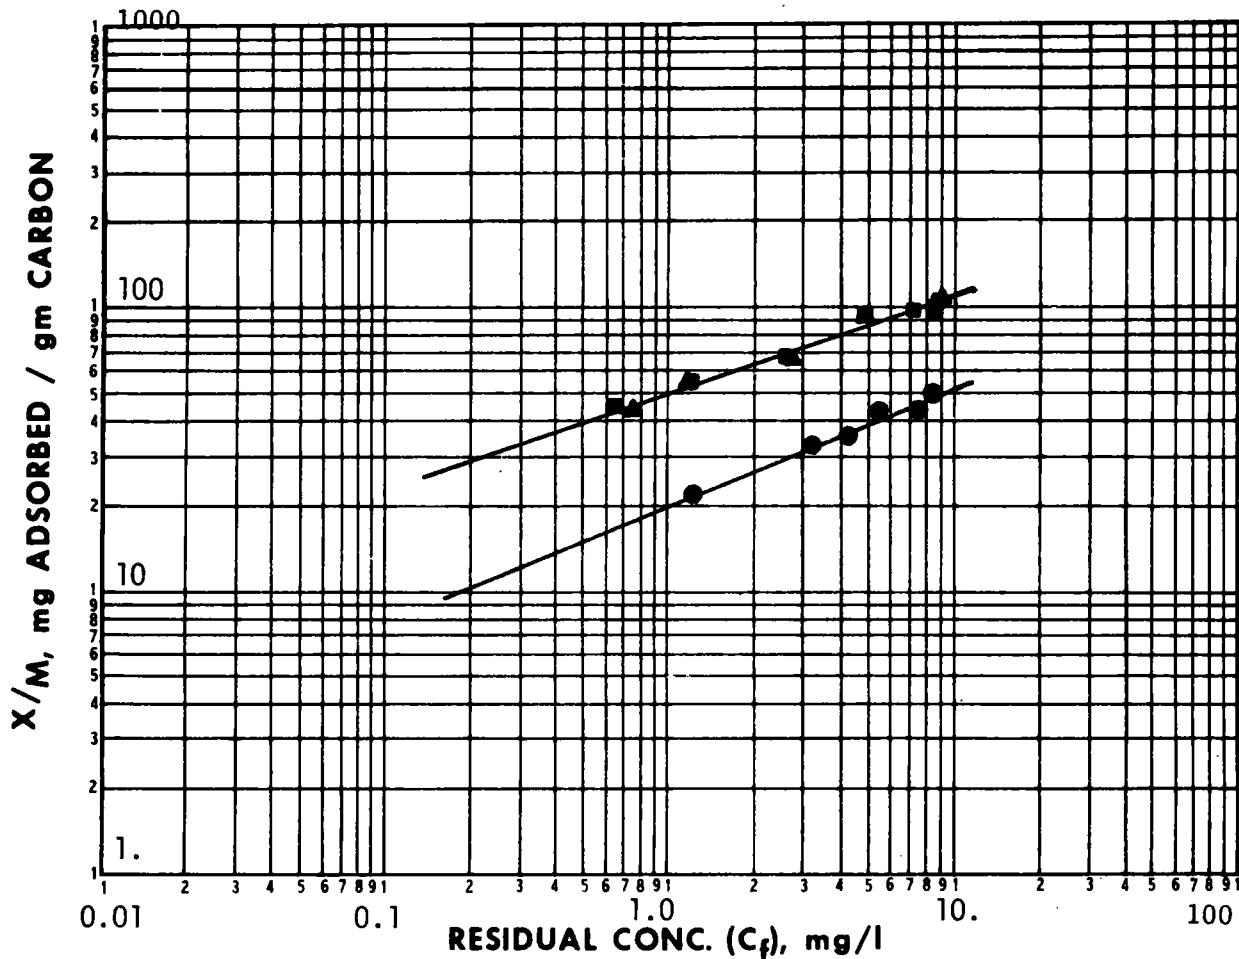

		$\bullet \text{ pH} = 3.0$			$\blacksquare \text{ pH} = 7.0$			$\blacktriangle \text{ pH} = 9.0$		
CARBON DOSE mg/l		C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M
pH 7										
pH 3										
pH 9										
0	0	9.85			9.60			9.55		
10	5							9.00	0.55	110
25	10	8.60	1.25	50	8.65	0.95	95	8.50	1.05	105
50	25	7.70	2.15	43	7.15	2.45	98			
100	50	5.55	4.30	43	4.92	4.68	93	4.85	4.70	94
150	100	4.25	5.60	37	2.68	2.92	69	2.75	6.80	68
200	150	3.23	6.62	33	1.32	8.28	55	1.25	8.30	55
400	200	1.30	8.55	22	0.65	8.95	45	0.75	8.80	44

COMPOUND: Anthracene

STRUCTURE:



FORMULA: $C_{14}H_{10}$ MOL. WT. 178.24

FREUNDLICH PARAMETERS	pH		
	5.3		
K	376		
1/n	0.70		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	376		
0.1	75		
0.01	15		
0.001	2.9		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	12	67	340
0.1		6.1	34
0.01			3.1


C_o , mg/l	
1.0	2.7
0.1	1.3
0.01	0.7

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS:

COMPOUND: Anthracene

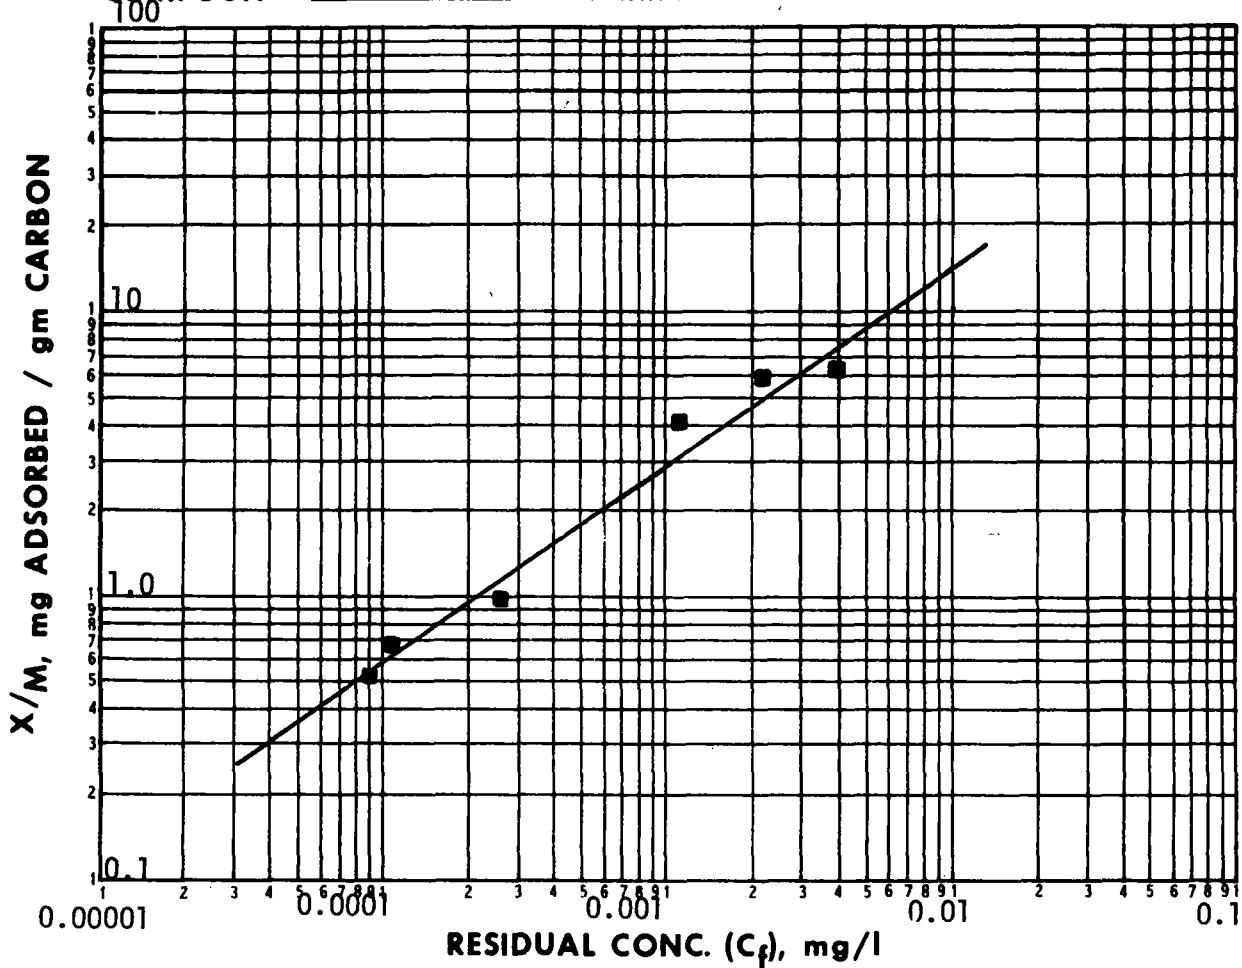

CARBON DOSE mg/l	$\bullet \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.00521								
0.2	0.00397	0.00124	6.20						
0.5	0.00222	0.00299	5.98						
1	0.00118	0.00403	4.03						
5	0.00027	0.00494	0.988						
7.5	0.00011	0.00510	0.680						
10	0.00009	0.00512	0.512						

COMPOUND: Benzene

STRUCTURE:



FORMULA: C₆H₆ **MOL. WT.** 78.12

FREUNDLICH PARAMETERS	PH		
	5.3		
K	1.0		
1/n	1.6		
Corr. Coef. r	0.97		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10.0	40		
1.0	1.0		
0.1	0.03		
0.01	0.0007		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l


C _o , mg/l	0.1	0.01	0.001
1.0	35,000	>100,000	>100,000
0.1		>100,000	>100,000
0.01			>100,000

C _o , mg/l	
1.0	980
0.1	4,000
0.01	14,000

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 254.6 nm.


REMARKS:

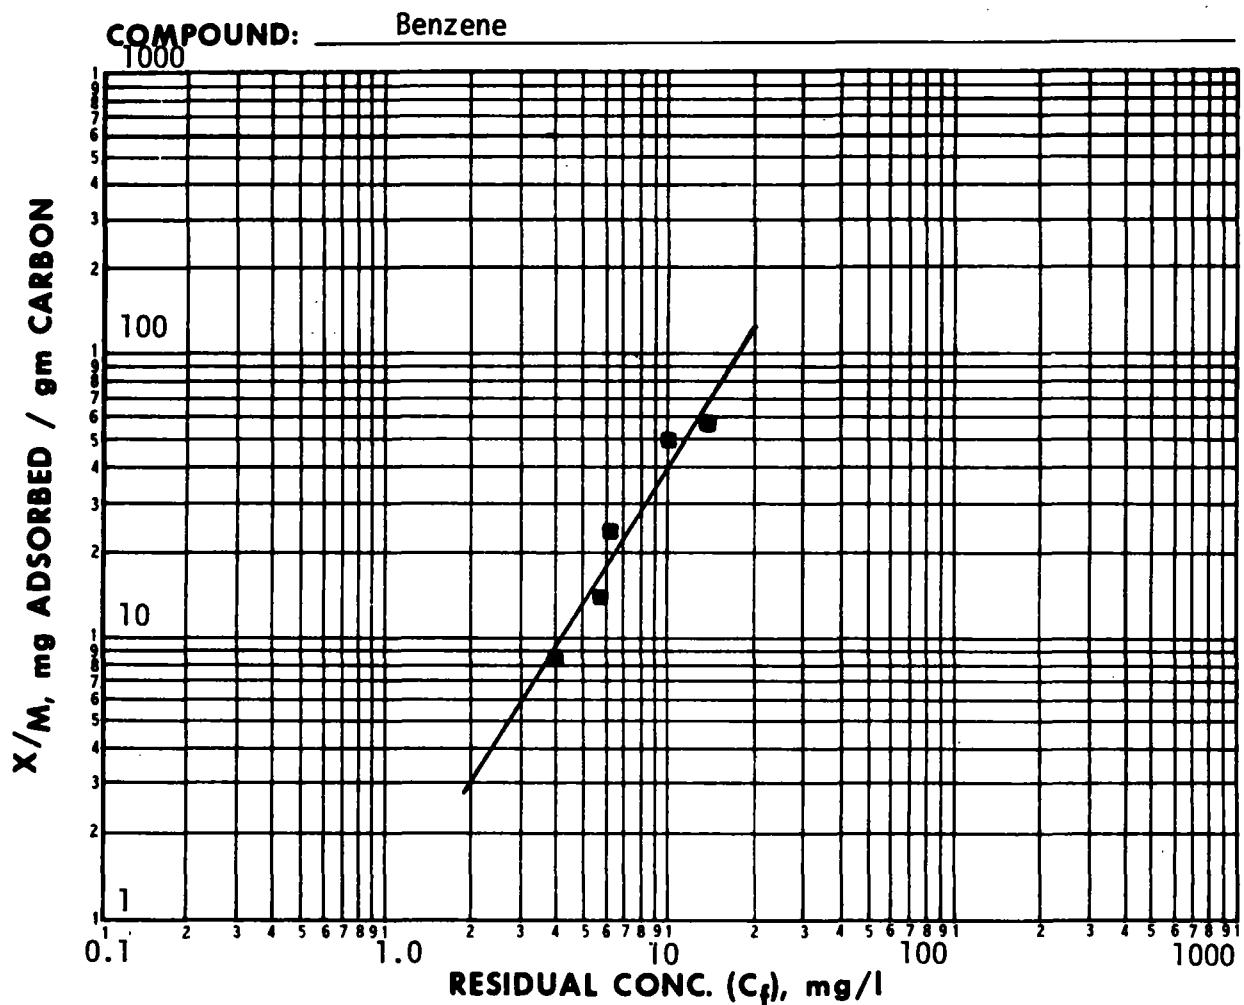

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	19.8								
96	14.2	5.6	58.3						
191	10.3	9.5	49.7						
573	6.2	13.6	23.7						
951	5.8	14.0	14.7						
1910	4.0	15.8	8.3						

COMPOUND: Benzidine dihydrochloride

STRUCTURE:



FORMULA: $\text{C}_{12}\text{H}_{12}\text{N}_2 \cdot 2\text{HCl}$ **MOL. WT.** 257.16

FREUNDLICH PARAMETERS	pH	
	3.0	pH 7 and 9 pooled
K	110	220
1/n	0.35	0.37
Corr. Coef. r	0.97	0.97
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm	
10	250	520
1.0	110	220
0.1	51	97
0.01	23	42

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l


C_o , mg/l	0.1	0.01	0.001	C_o , mg/l	
1.0	9.4	24	58	1.0	4.5
0.1		2.2	5.7	0.1	1.0
0.01			0.52	0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 277 nm

REMARKS: OSHA regulated carcinogen.


COMPOUND: Benzidine dihydrochloride

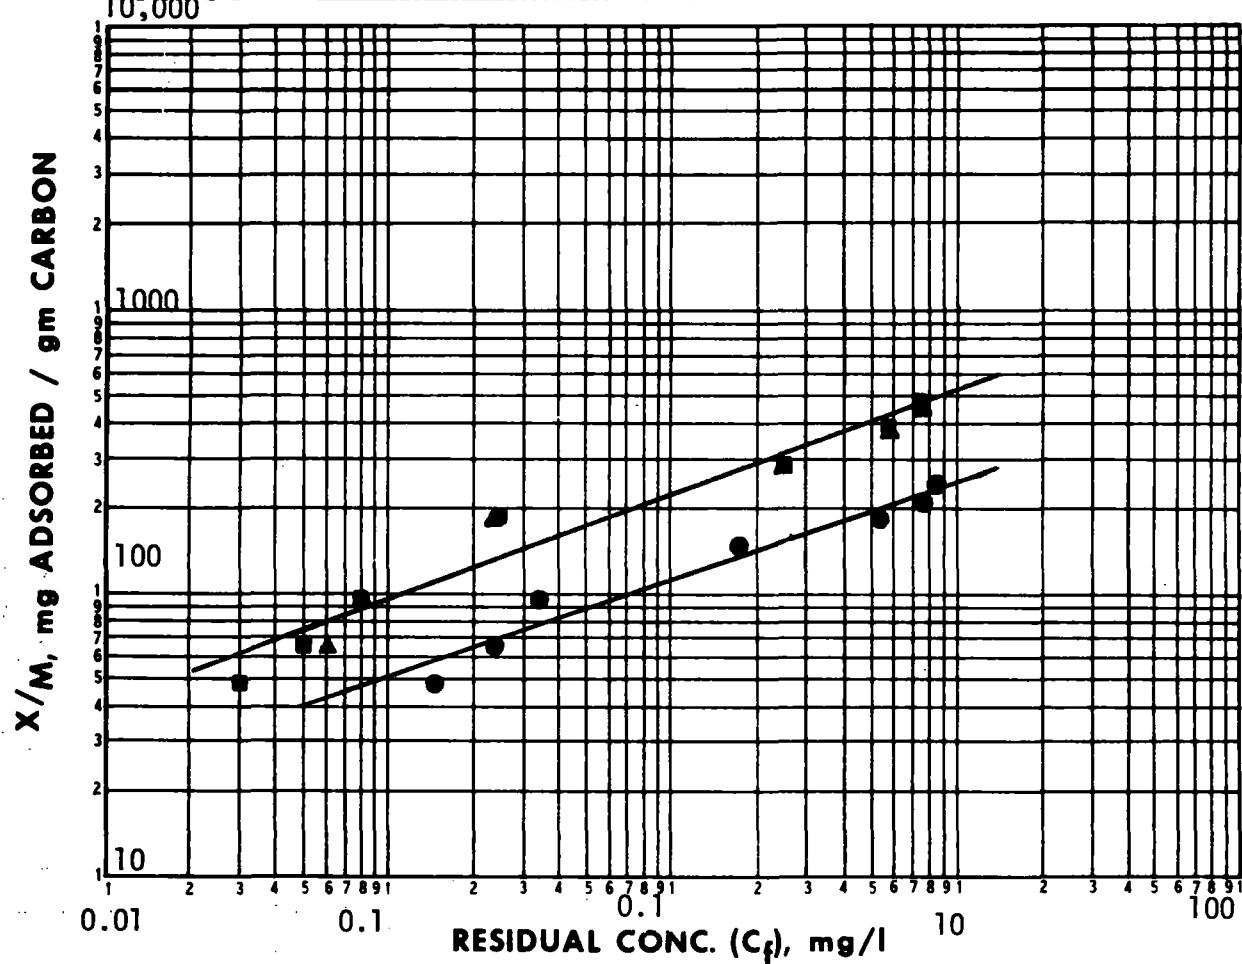

CARBON DOSE mg/l	pH = 3.0			pH = 7.0			pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	9.99			9.78			9.78		
5	8.73	1.26	252	7.33	2.45	490	7.46	2.32	464
10	7.92	2.07	207	5.83	3.95	395	5.90	3.88	388
25	5.36	4.63	185	2.56	7.22	289	2.54	7.24	290
50	1.80	8.19	164	0.25	9.53	191	0.23	9.55	191
100	0.34	9.65	97	0.08	9.70	97	0.08	9.70	97
150	0.23	9.76	65	0.05	9.73	65	0.06	9.72	65
200	0.16	9.83	49	0.03	9.75	49			

COMPOUND: Benzoic acid

STRUCTURE:



FORMULA: C₇H₆O₂ **MOL. WT.** 122.12

FREUNDLICH PARAMETERS	pH		
	3.0	7.0	9.0
K	51	0.76	0.0008
1/n	0.42	1.8	4.3
Corr. Coef. r	0.99	0.91	0.86
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	130	54	21
1.0	51	0.76	0.0008
0.1	19	0.01	-
0.01	7.3	0.0002	-

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l


C ₀ , mg/l	0.1	0.01	0.001
1.0	85,000	> 100,000	> 100,000
0.1		> 100,000	> 100,000
0.01			> 100,000

C ₀ , mg/l	
1.0	1,300
0.1	9,300
0.01	67,000

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 223 nm


REMARKS:

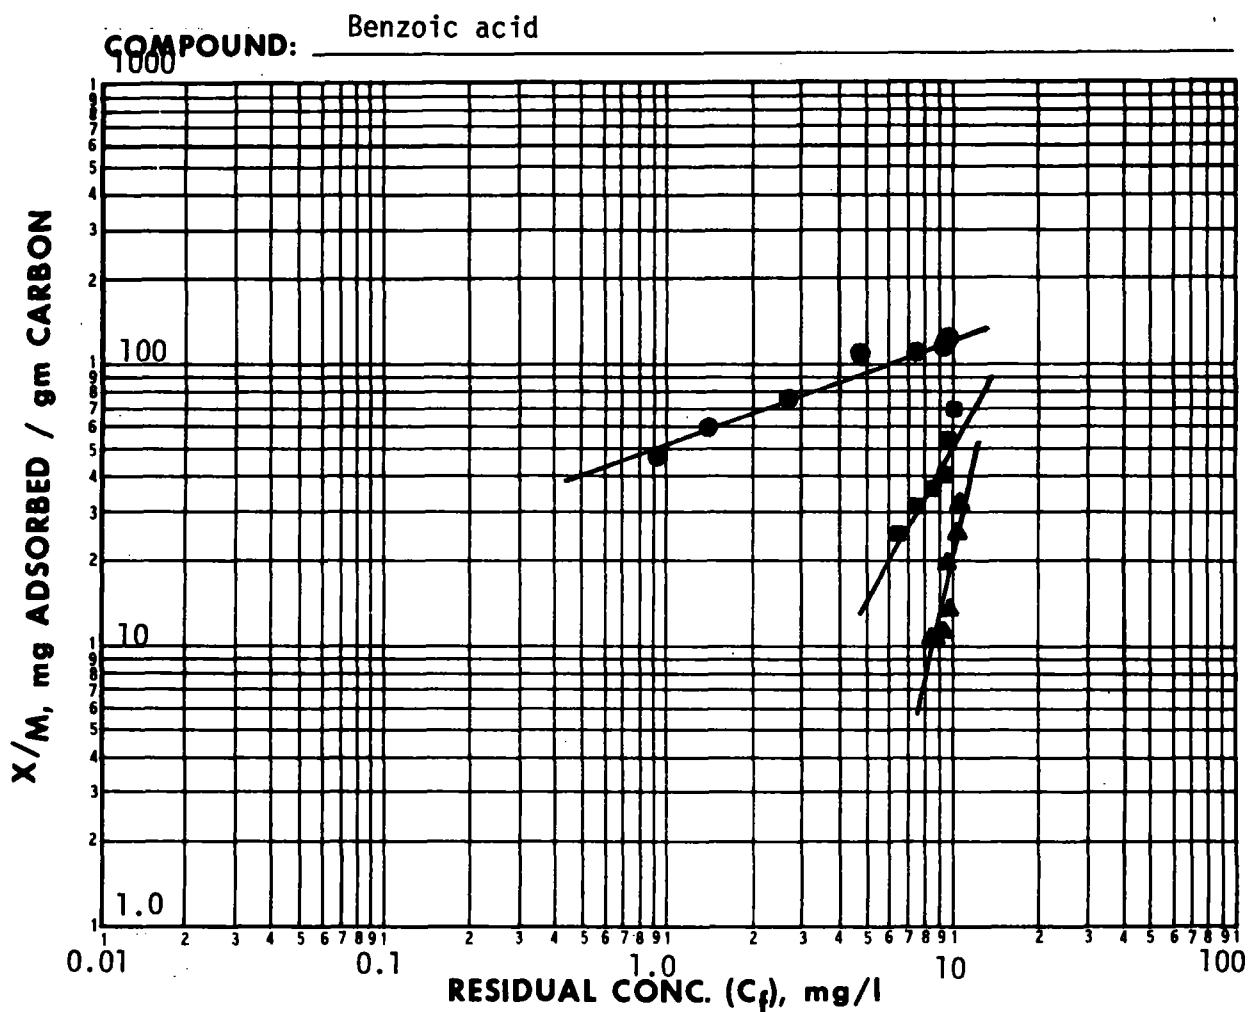

CARBON DOSE mg/l	\bullet pH = 3.0			\blacksquare pH = 7.0			\blacktriangle pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	10.45			10.45			10.46		
5	9.79	0.66	132	10.10	0.35	70	10.30	0.16	32
10	9.19	1.26	126	9.92	0.52	53	10.19	0.27	27
25	7.58	2.87	115	9.46	0.99	40	9.95	0.51	20
50	4.85	5.60	112	8.60	1.85	37	9.78	0.68	14
100	2.78	7.67	77	7.36	3.09	31	9.20	1.26	12
150	1.47	8.98	60	6.51	3.94	26	8.83	1.63	11
200	0.92	9.53	48				8.17	2.29	11

COMPOUND: 3,4-Benzofluoranthene (Benzo(b)fluoranthene)

STRUCTURE:



FORMULA: C₂₀H₁₂ **MOL. WT.** 252.32

FREUNDLICH PARAMETERS	pH		
	7.0		
K	57.0		
1/n	0.37		
Corr. Coef. r	0.94		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	57		
0.1	24		
0.01	10		
0.001	4.3		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C _o , mg/l	0.1	0.01	0.001
1.0	37	95	230
0.1		8.7	22
0.01			2.0


C _o , mg/l	
1.0	18
0.1	4.2
0.01	1.0

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Fluorescence: excitation 298 nm; emission 440 nm.

REMARKS: Modified protocol used for isotherm due to limited solubility.


COMPOUND: 3,4-Benzofluoranthene (Benzo(b)fluoranthene)

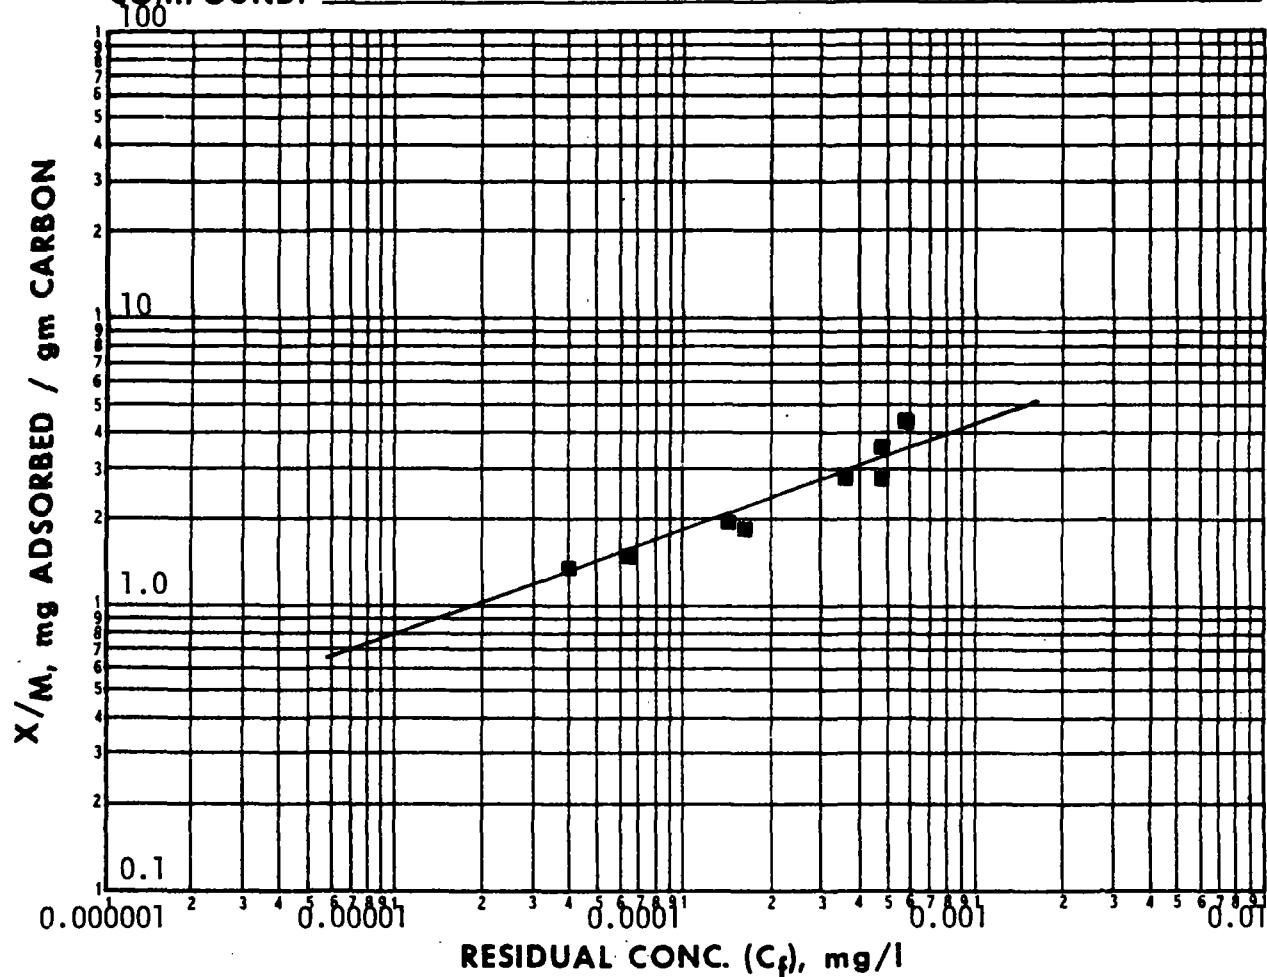

CARBON DOSE mg/l	$C_0 \times 10^3$	$C_f \times 10^3$	$C_0 - C_f = X$	X/M
0.14	1.20	0.583	0.000617	4.41
0.14	1.00	0.483	0.000517	3.69
0.29	1.18	0.372	0.000808	2.79
0.29	1.29	0.483	0.000807	2.78
0.43	1.00	0.150	0.000850	1.98
0.43	1.00	0.172	0.000828	1.92
0.72	1.20	0.064	0.001136	1.58
0.81	1.21	0.040	0.001170	1.44

COMPOUND: Benzo(k)fluoranthene

STRUCTURE:



FORMULA: C₂₀H₁₂ **MOL. WT.** 252.32

FREUNDLICH PARAMETERS	pH		
	7.1		
K	181		
1/n	0.57		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	180		
0.1	48		
0.01	13		
0.001	3.5		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l


C ₀ , mg/l	0.1	0.01	0.001
1.0	18	76	280
0.1		6.7	28
0.01			2.6

C ₀ , mg/l	
1.0	5.5
0.1	2.1
0.01	0.8

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Fluorescence; excitation 302 nm; emission 415 nm.


REMARKS: Modified protocol used for isotherm due to limited solubility.

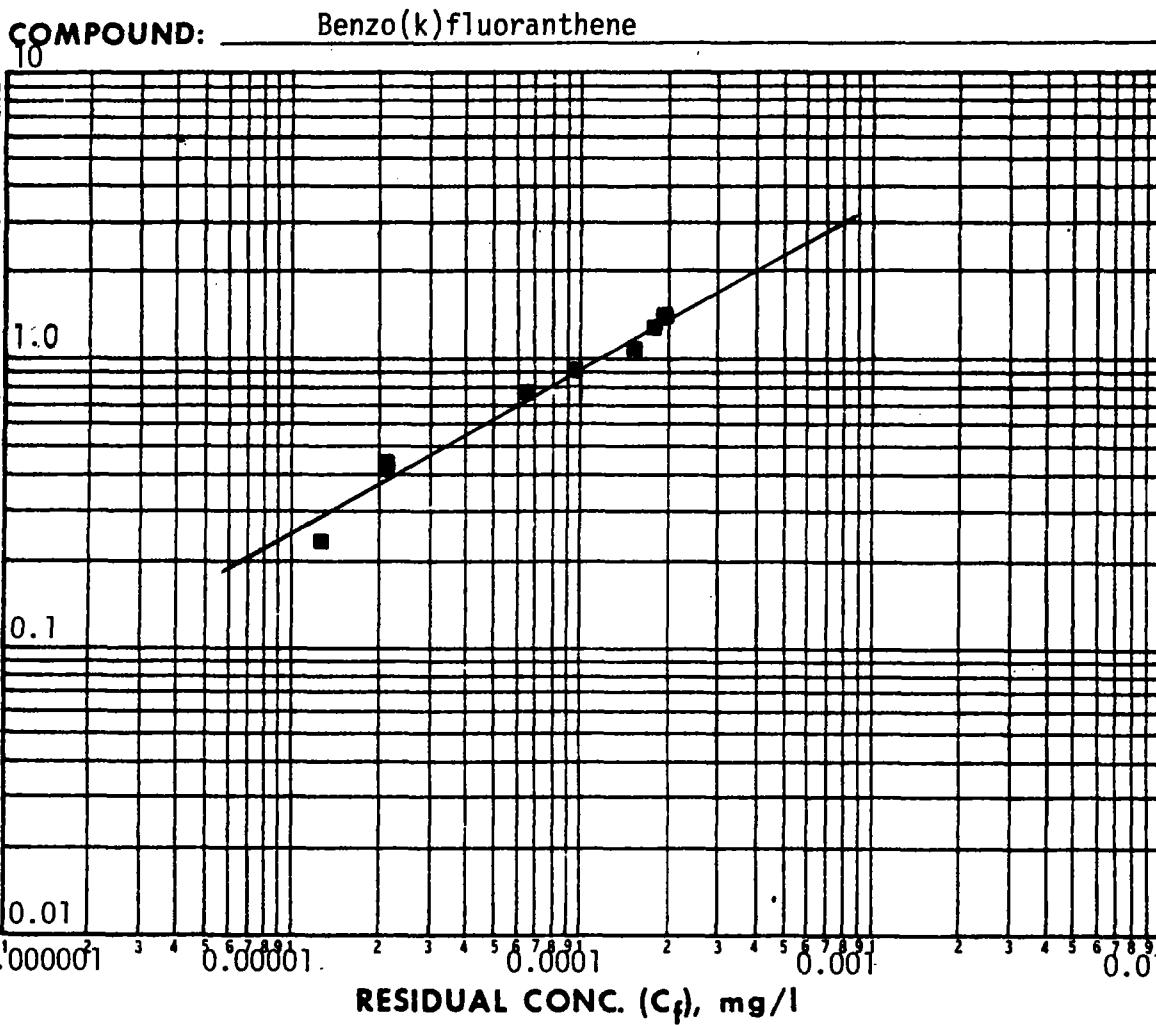

CARBON DOSE mg/l	$C_o \times 10^3$	$C_f \times 10^3$	$C_o - C_f = X$	X/M
0.14	0.397	0.194	0.000203	1.45
0.15	0.377	0.182	0.000195	1.30
0.28	0.471	0.164	0.000307	1.10
0.29	0.358	0.095	0.000263	0.91
0.42	0.391	0.065	0.000326	0.78
0.74	0.349	0.021	0.000328	0.44
0.75	0.337	0.021	0.000316	0.42
1.49	0.365	0.013	0.000352	0.24

COMPOUND: Benzo(ghi)perylene

STRUCTURE:



FORMULA: C₂₂H₁₂

MOL. WT. 276.34

FREUNDLICH PARAMETERS	pH		
	7.0		
K	10.7		
1/n	0.37		
Corr. Coef. r	0.92		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	10.7		
0.1	4.6		
0.01	2.0		
0.001	0.85		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	200	510	1200
0.1		46	120
0.01			11

GRANULAR CARBON COLUMN


C ₀ , mg/l	
1.0	93
0.1	22
0.01	5.0

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Fluorescence: excitation 293 nm; emission 418 nm.

REMARKS: Modified protocol used for isotherm due to limited solubility


COMPOUND: Benzo(ghi)perylene

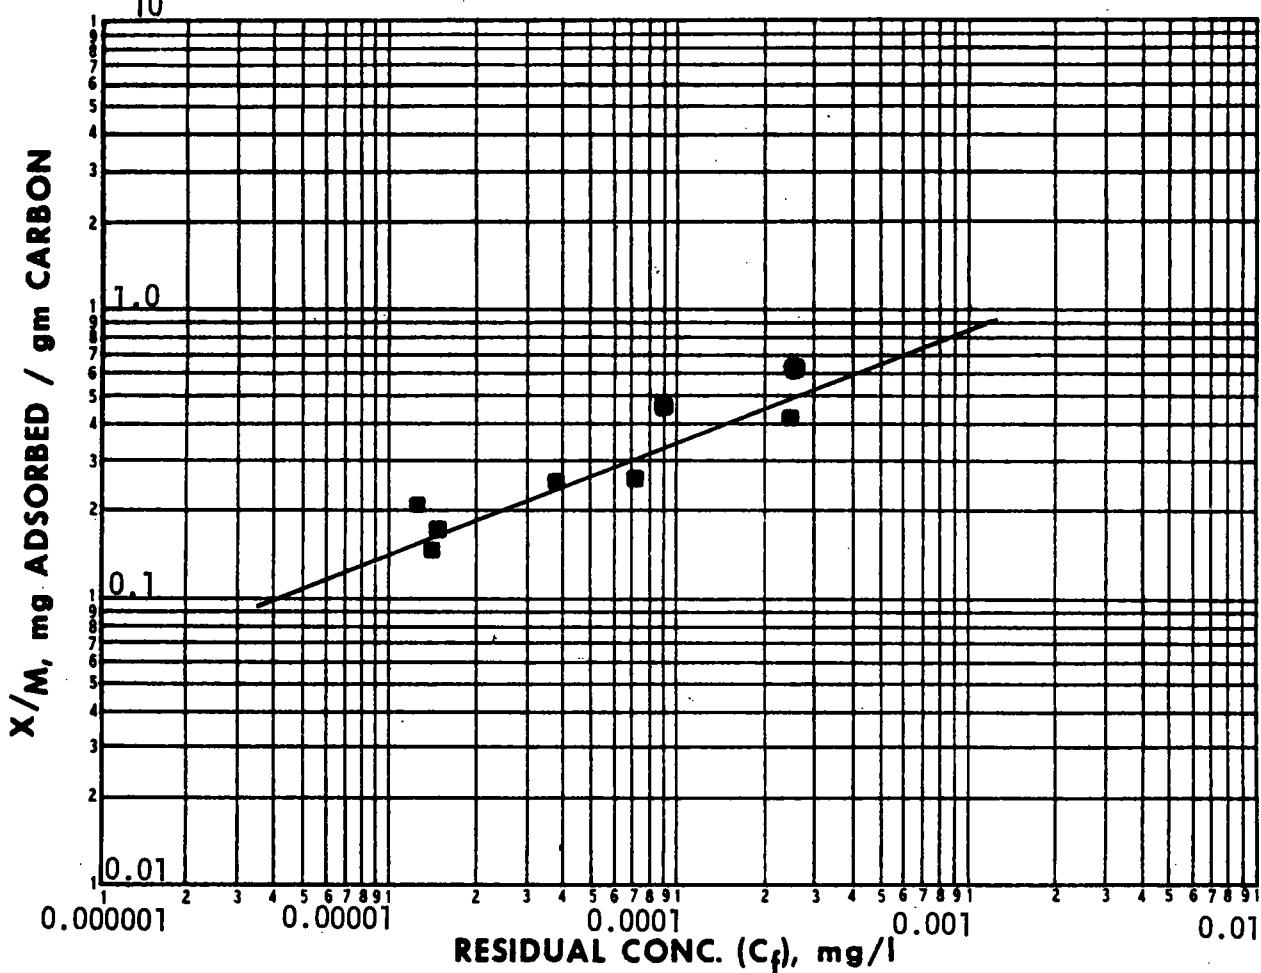

CARBON DOSE mg/l	C_o^*	C_f^*	$C_o - C_f = X^*$	X/M
0.141	0.353	0.267	0.086	0.610
0.143	0.157	0.090	0.067	0.469
0.146	0.306	0.246	0.060	0.411
0.156	0.113	0.071	0.042	0.269
0.308	0.120	0.039	0.081	0.263
0.303	0.076	0.013	0.063	0.208
0.448	0.096	0.016	0.080	0.179
0.454	0.087	0.015	0.072	0.158
$* \times 10^3$				

COMPOUND: Benzo(a)pyrene

STRUCTURE:



FORMULA: C₂₀H₁₂

MOL. WT. 252.30

FREUNDLICH PARAMETERS	pH		
	7.1		
K	33.6		
1/n	0.44		
Corr. Coef. r	0.90		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	34		
0.1	12		
0.01	4.5		
0.001	1.6		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	74	220	621
0.1		20	62
0.01			5.6

GRANULAR CARBON COLUMN


C ₀ , mg/l	
1.0	29
0.1	8.3
0.01	2.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Fluorescence: excitation 298 nm; emission 405 nm.

REMARKS: Modified protocol used for isotherm due to limited solubility.

COMPOUND: Benzo(a)pyrene

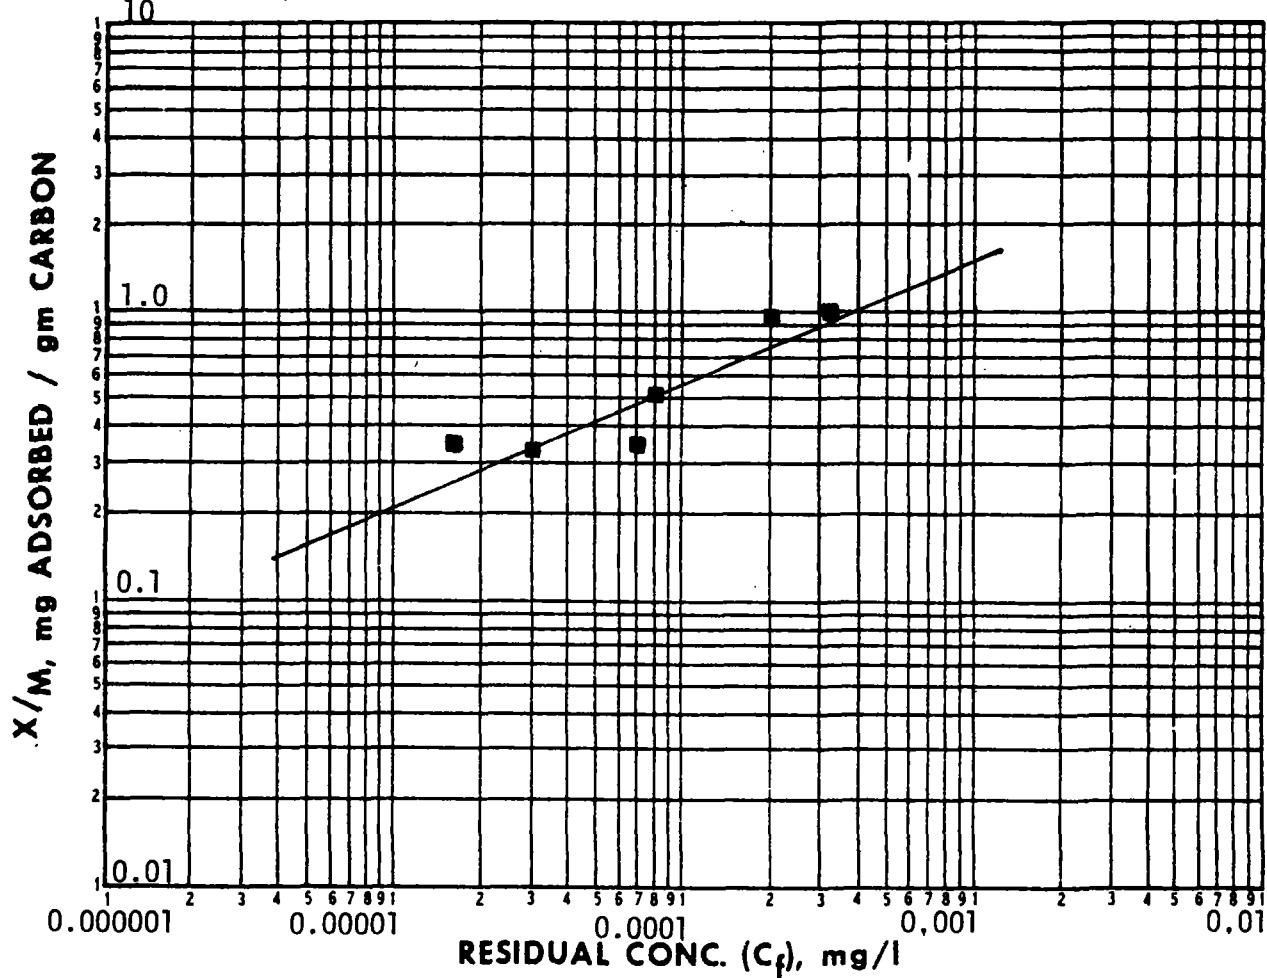

CARBON DOSE mg/l	$C_o \times 10^3$	$C_f \times 10^3$	$C_o - C_f = X$	X/M
1.2	1.60	0.32	0.00128	1.067
1.2	1.38	0.20	0.00118	0.983
3.9	1.40	0.017	0.00138	0.354
3.9	2.05	0.080	0.00197	0.505
4.0	1.47	0.070	0.00140	0.350
4.0	1.35	0.030	0.00132	0.330

COMPOUND: Benzothiazole

STRUCTURE:



FORMULA: C₇H₅NS **MOL. WT.** 135.19

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	120		
1/n	0.27		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	230		
1.0	120		
0.1	65		
0.01	35		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	14	28	52
0.1		2.5	5.2
0.01			0.47


C ₀ , mg/l	
1.0	8.2
0.1	1.5
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 251 nm

REMARKS:


COMPOUND: Benzothiazole

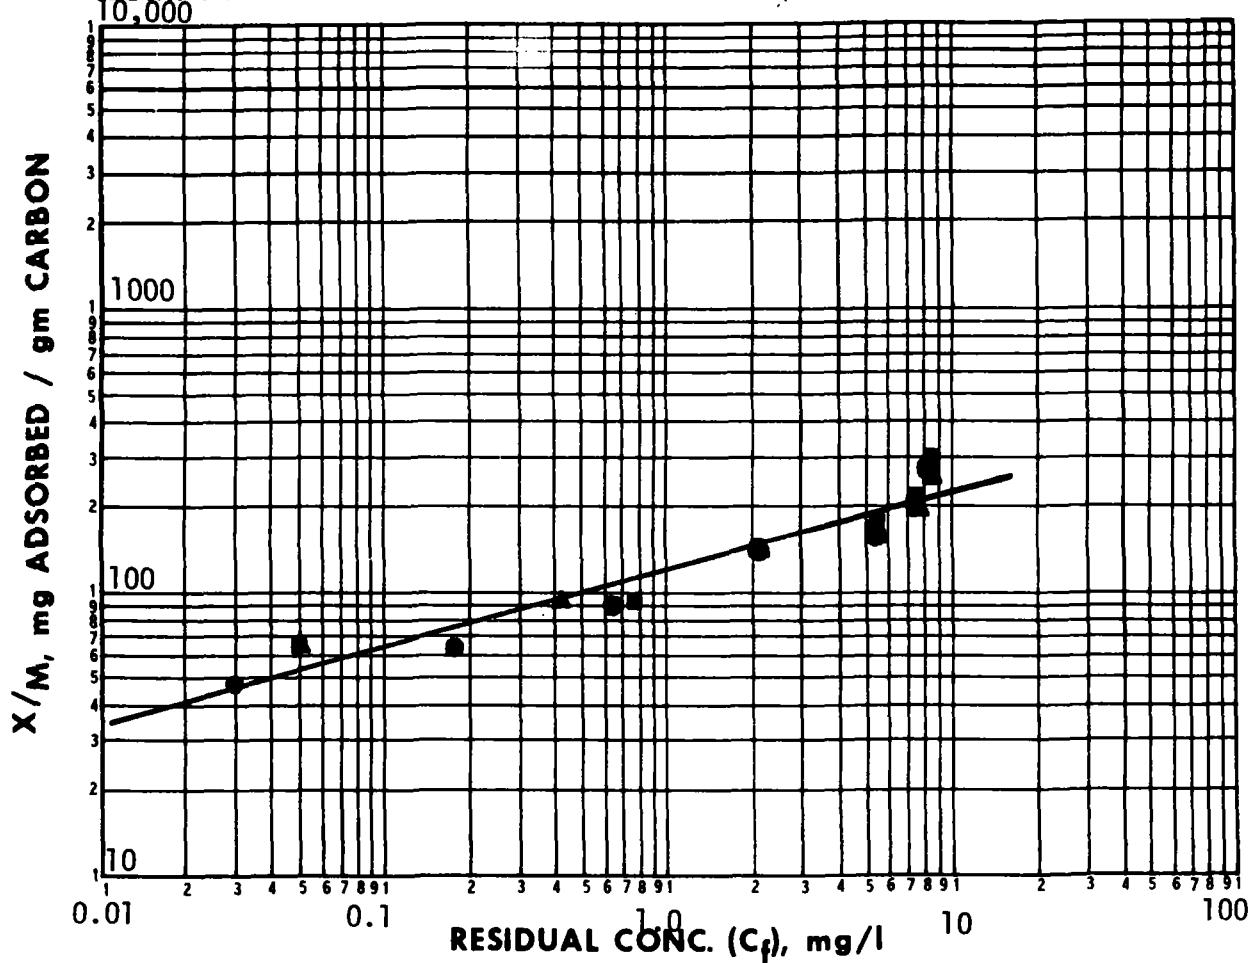

CARBON DOSE mg/l	$\bullet \text{ pH} = 3.0$			$\blacksquare \text{ pH} = 7.0$			$\blacktriangle \text{ pH} = 9.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.61			9.85			9.73		
5	8.23	1.38	276	8.35	1.50	300	8.40	1.33	266
10	7.60	2.01	201	7.68	2.17	217	7.75	1.98	198
25	5.42	4.19	168	5.35	4.50	180	5.52	4.21	168
50	2.12	7.49	150	2.17	7.68	154	2.12	7.61	152
100	0.65	8.96	90	0.77	9.08	91	0.41	9.32	93
150	0.18	9.43	63	0.05	9.80	65	0.05	9.68	65
200	0.03	9.58	48						

COMPOUND: α -BHC

STRUCTURE:

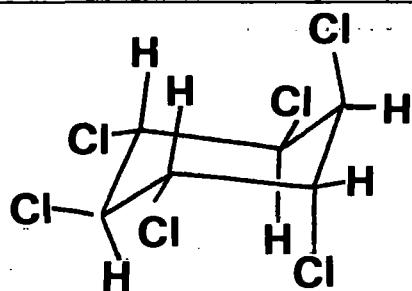FORMULA: $C_6H_6Cl_6$ MOL. WT. 290.83

FREUNDLICH PARAMETERS	pH		
	5.4		
K	303		
1/n	0.43		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	303		
0.1	112		
0.01	41		
0.001	15		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l


C_o , mg/l	0.1	0.01	0.001
1.0	8.0	24	64
0.1		2.2	6.4
0.01			0.6

C_o , mg/l	
1.0	3.3
0.1	0.9
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.


REMARKS: Isotherm measured using a mixture containing 71% alpha isomer and 29% beta isomer.

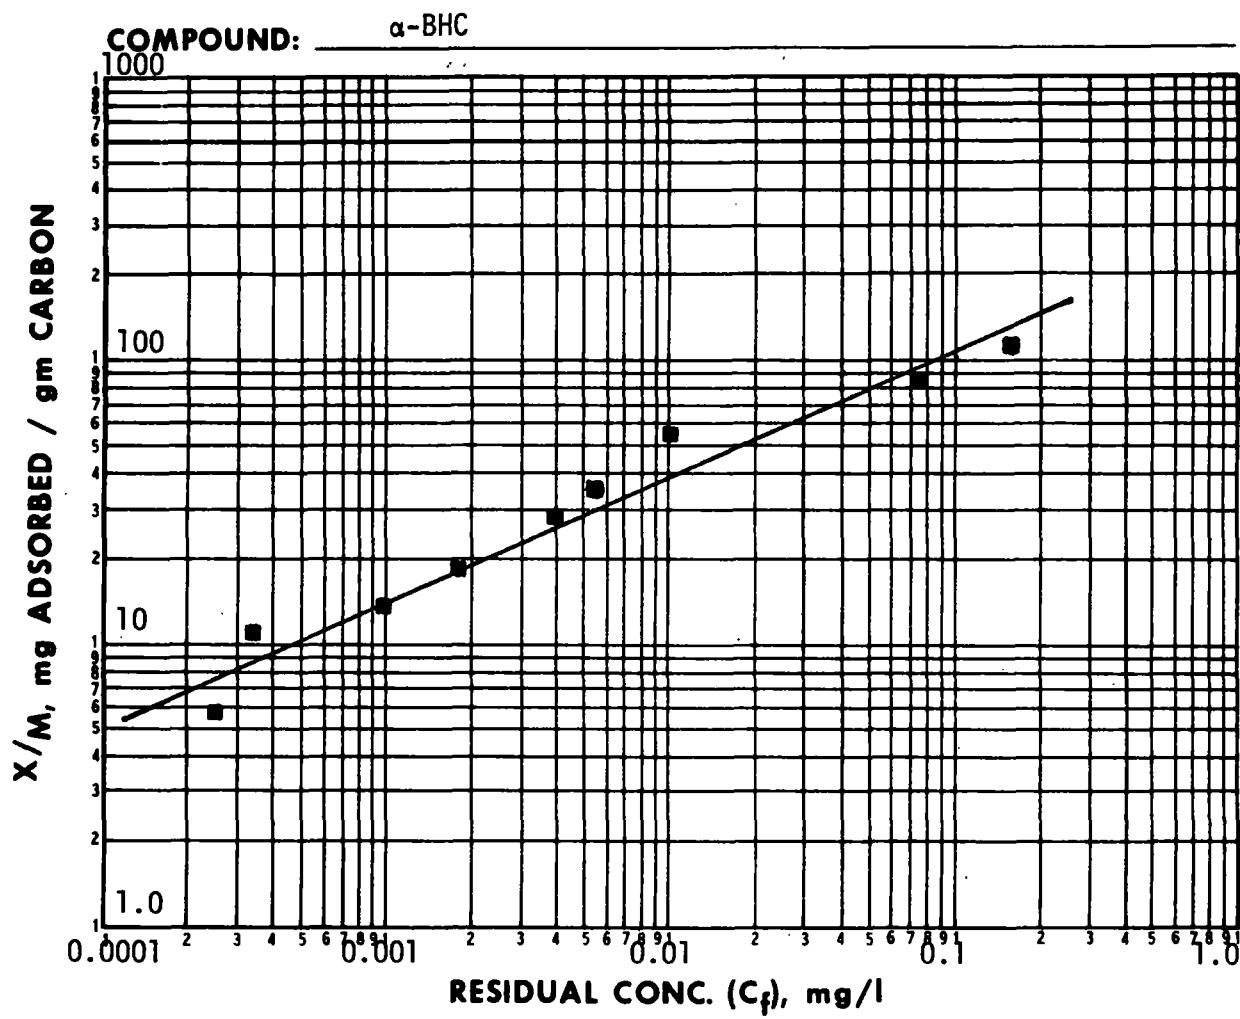

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.4$			$\text{pH} =$			$\text{pH} =$		
	$\blacksquare \text{ pH} = 5.4$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
	$\times 10^3$								
0	289								
1.0	167	0.122	122						
2.5	75.3	0.214	85.5						
5.0	10.1	0.279	55.8						
7.5	5.28	0.284	37.8						
10	3.97	0.285	28.5						
15	1.83	0.287	19.1						
20	0.99	0.288	14.4						
25	0.33	0.288	11.5						
50	0.25	0.288	5.8						

COMPOUND: β -BHC

STRUCTURE:

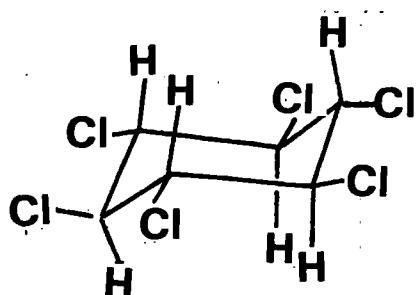FORMULA: $C_6H_6Cl_6$ MOL. WT. 290.83

FREUNDLICH PARAMETERS	pH		
	5.4		
K	220		
1/n	0.49		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	220		
0.1	71		
0.01	23		
0.001	7.5		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

 C_f , mg/l


C_o , mg/l	0.1	0.01	0.001
1.0	13	43	130
0.1		3.9	13
0.01			1.2

C_o , mg/l	
1.0	4.5
0.1	1.4
0.01	0.4

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G. C.


REMARKS: Isotherm measured using a mixture containing 29% beta isomer and 71% alpha isomer.

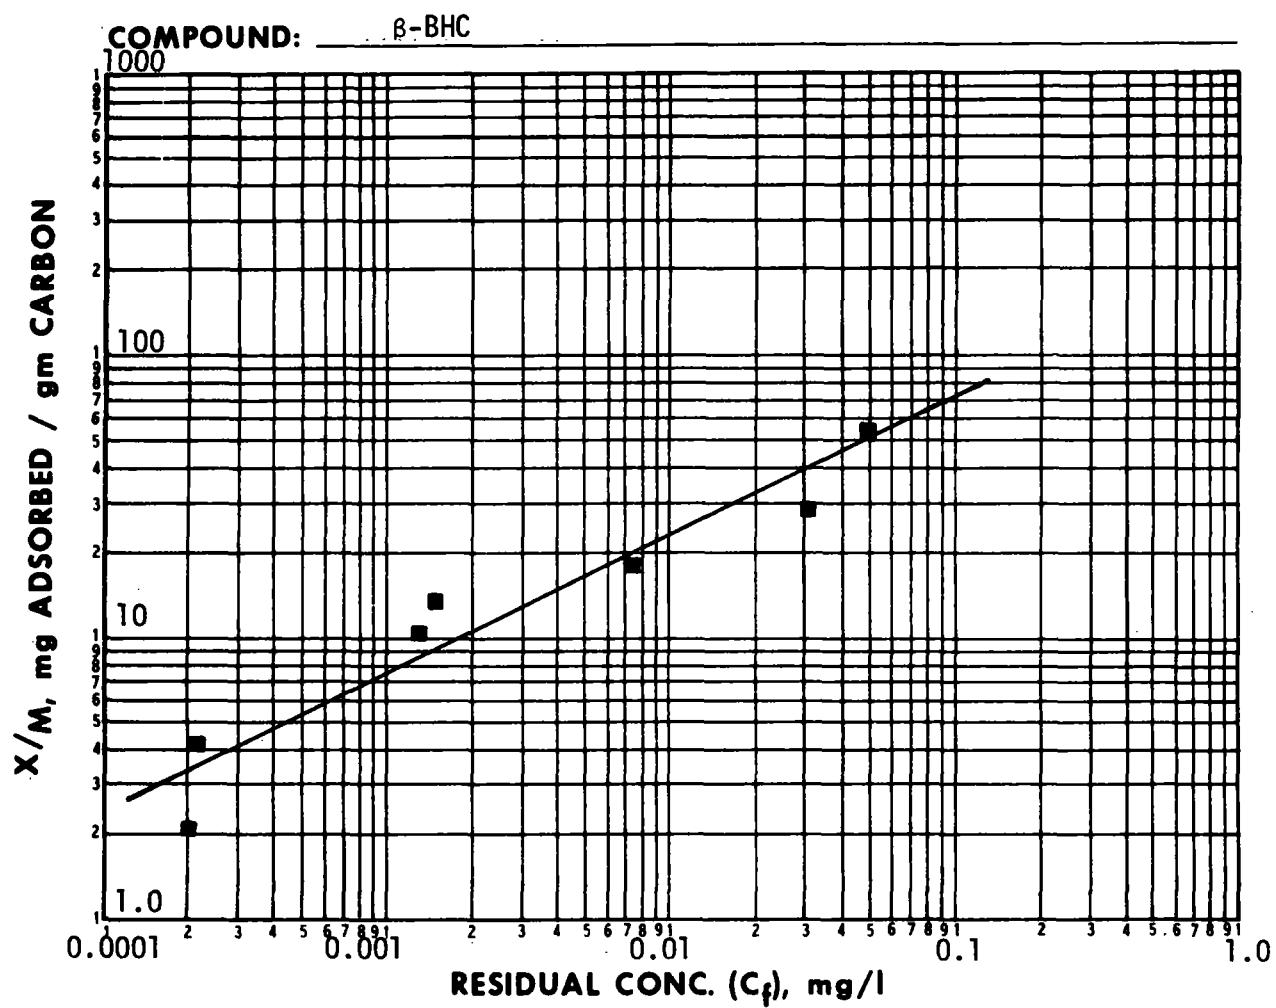

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.4$			$\blacksquare \text{ pH} =$			$\blacksquare \text{ pH} =$				
	C_f $\times 10^3$	$C_o - C_f = X$		X/M	C_f	$C_o - C_f = X$		X/M	C_f	$C_o - C_f = X$	
		C_o	C_f			$C_o - C_f$	X			$C_o - C_f$	X/M
0	104										
1.0	49.6	0.0544	54.4								
2.5	30.4	0.0736	29.4								
5.0	7.27	0.0967	19.3								
7.5	1.56	0.1024	13.7								
10	1.31	0.1027	10.3								
25	0.22	0.1038	4.15								
50	0.20	0.1038	2.08								

COMPOUND: γ -BHC (Lindane)

STRUCTURE:

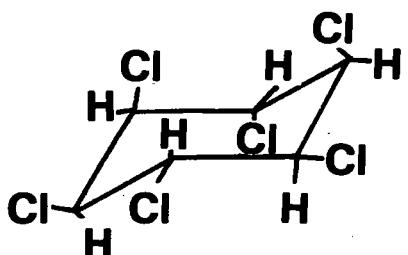

FORMULA: $C_6H_6Cl_6$ MOL. WT. 290.83

FREUNDLICH PARAMETERS	pH		
	5.3		
K	256		
1/n	0.49		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	256		
0.1	83		
0.01	27		
0.001	8.8		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	11	40	115
0.1		3.4	11
0.01			1.0


C_o , mg/l	
1.0	3.9
0.1	1.2
0.01	0.4

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent extraction - G. C.


REMARKS:

COMPOUND: γ -BHC (Lindane)

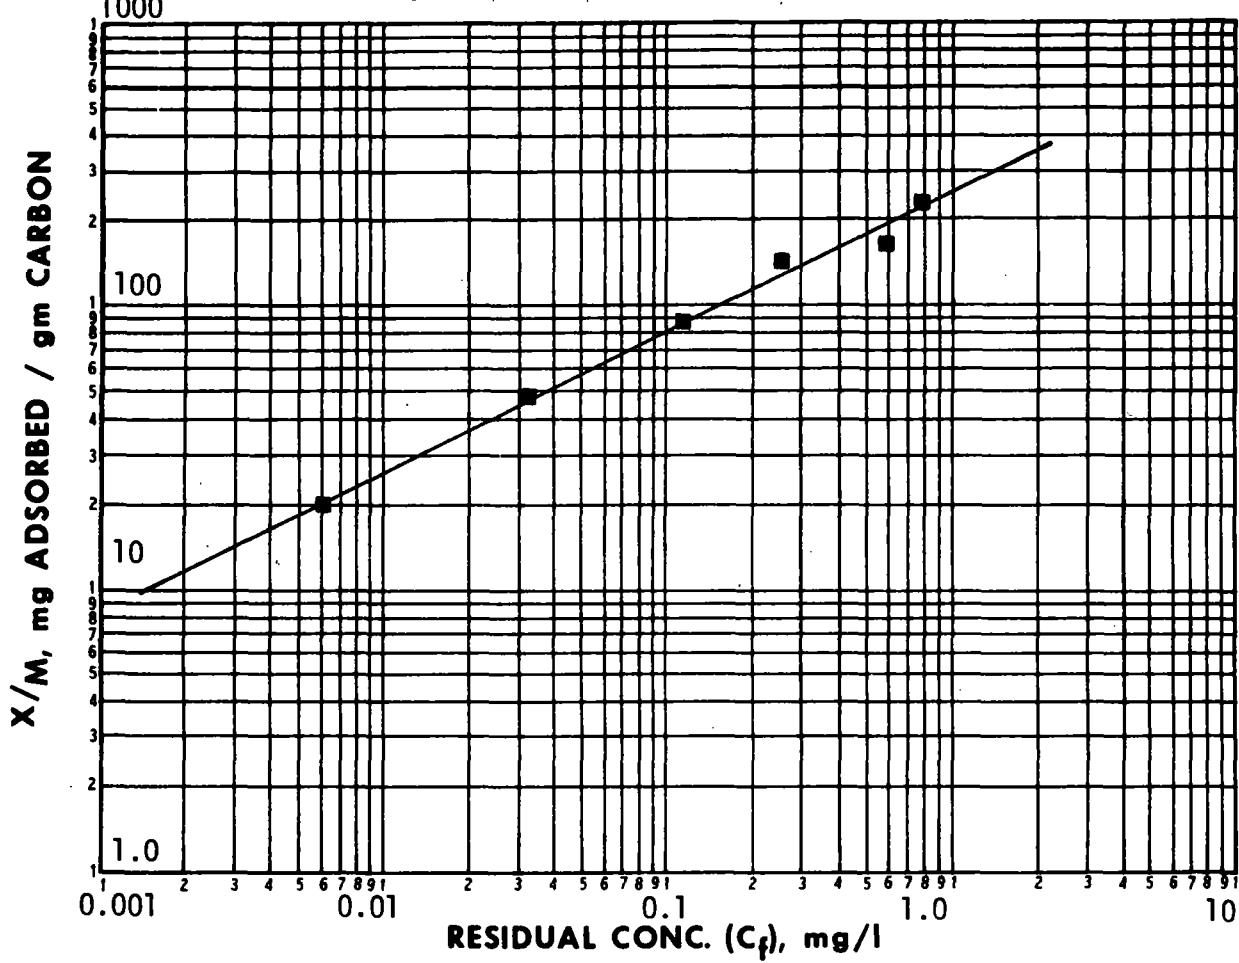

COMPOUND: Bromoform

STRUCTURE:



FORMULA: CHBr₃ **MOL. WT.** 252.75

FREUNDLICH PARAMETERS	pH		
K	19.6		
1/n	0.52		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	19.6		
0.1	5.9		
0.01	1.8		
0.001	0.52		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

GRANULAR CARBON COLUMN


C_o , mg/l	0.1	0.01	0.001
1.0	150	560	1,900
0.1		51	190
0.01			17

C_o , mg/l	
1.0	51
0.1	17
0.01	5.7

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap


REMARKS:

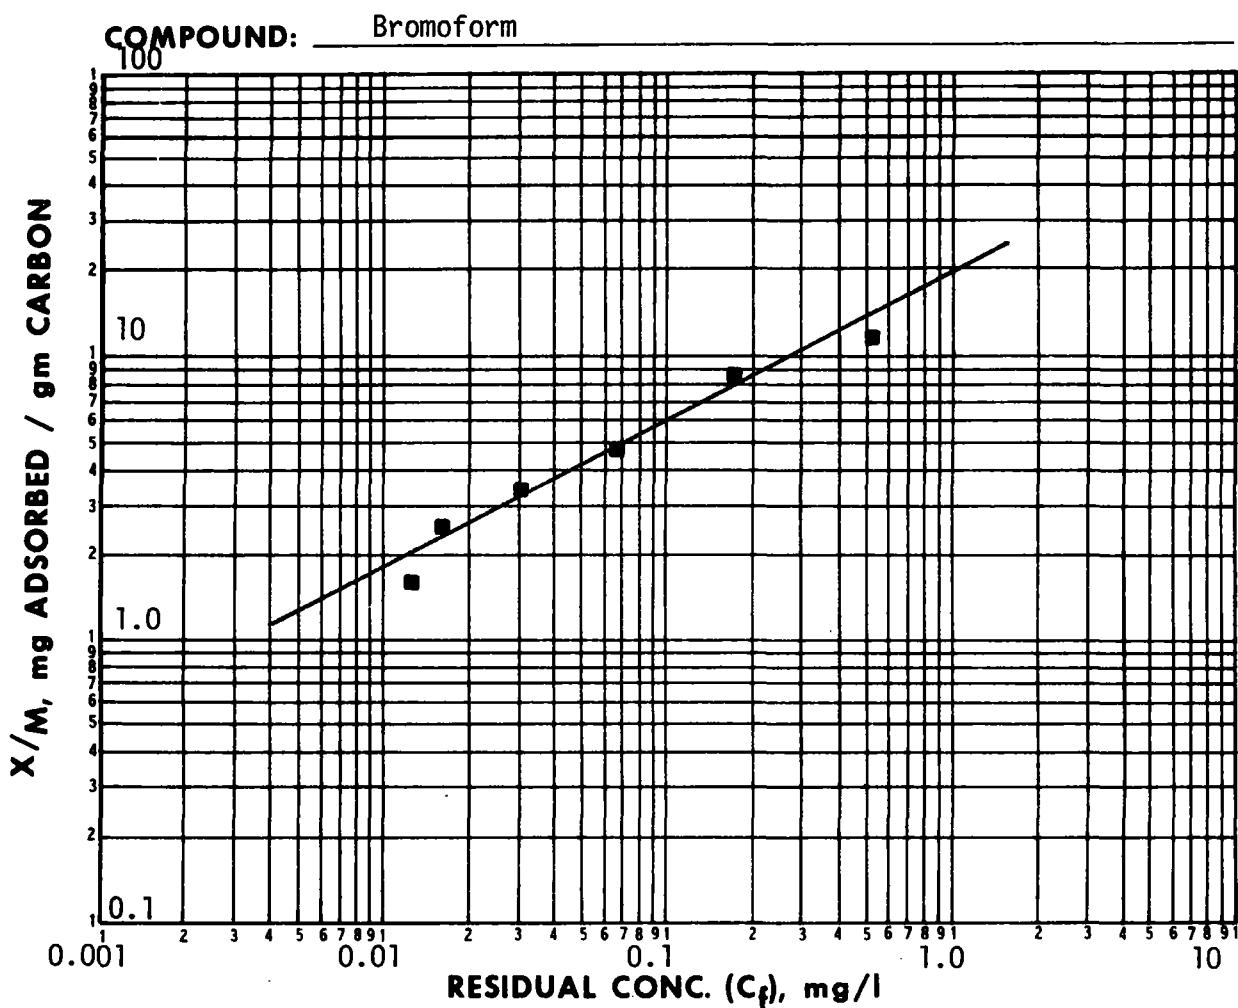

CARBON DOSE mg/l	pH = 5.3			pH =			pH =		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.000								
38	0.515	0.485	12.6						
96	0.175	0.825	8.58						
192	0.068	0.932	4.85						
289	0.0303	0.970	3.36						
385	0.0172	0.983	2.56						
577	0.0133	0.987	1.71						

COMPOUND: 4-Bromophenyl phenyl ether

STRUCTURE:



FORMULA: C₁₂H₉OCl

MOL. WT. 249.11

FREUNDLICH PARAMETERS	pH		
	5.3		
K	144		
1/n	0.68		
Corr. Coef. r	0.91		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	144		
0.1	30		
0.01	6.2		
0.001	1.3		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

<i>C₀</i> , mg/l	0.1	0.01	0.001
1.0	30	160	770
0.1		14	76
0.01			6.9


<i>C₀</i> , mg/l	
1.0	7.0
0.1	3.3
0.01	1.6

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 229.5 nm.

REMARKS:


COMPOUND: 4-Bromophenyl phenyl ether

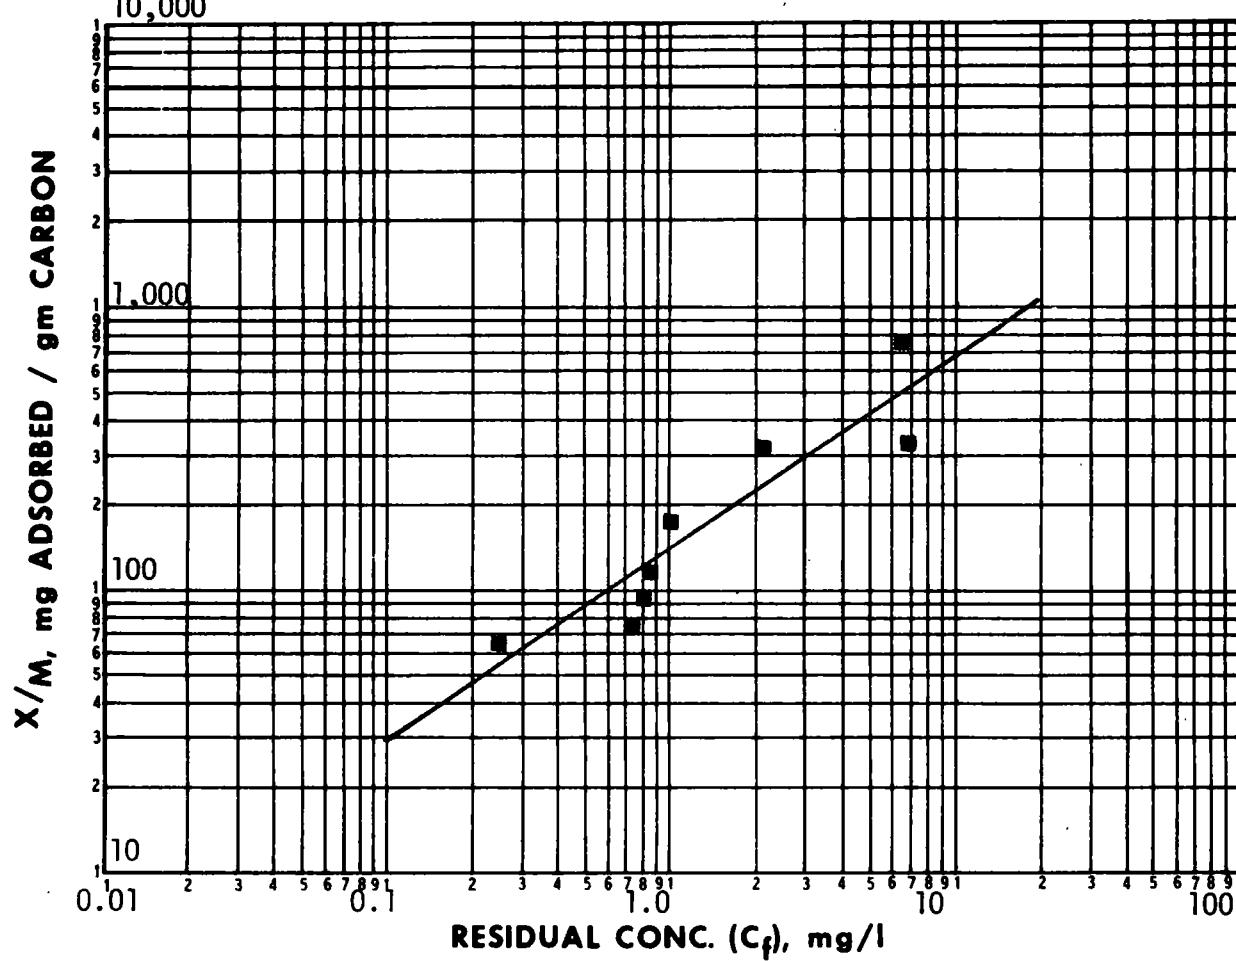

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	10.20								
5	6.36	3.84	768						
10	6.88	3.32	332						
25	2.08	8.12	324.8						
50	1.00	9.20	184						
75	0.84	9.36	124.8						
100	0.80	9.40	94						
125	0.72	9.48	75.8						
150	0.24	9.96	66.4						

COMPOUND: 5-Bromouracil

STRUCTURE:



FORMULA: $C_4H_3N_2O_2Br$ **MOL. WT.** 190.99

FREUNDLICH PARAMETERS	pH		
	pH 3 and 7 pooled	9.0	
K	44	21	
1/n	0.47	0.56	
Corr. Coef. r	0.95	0.86	
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	130	78	
1.0	44	21	
0.1	15	5.8	
0.01	5.1	1.6	

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	60	200	580
0.1		18	58
0.01			5.2

GRANULAR CARBON COLUMN


C_o , mg/l	
1.0	23
0.1	6.6
0.01	2.0

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 279 nm

REMARKS:


COMPOUND: 5-Bromouracil

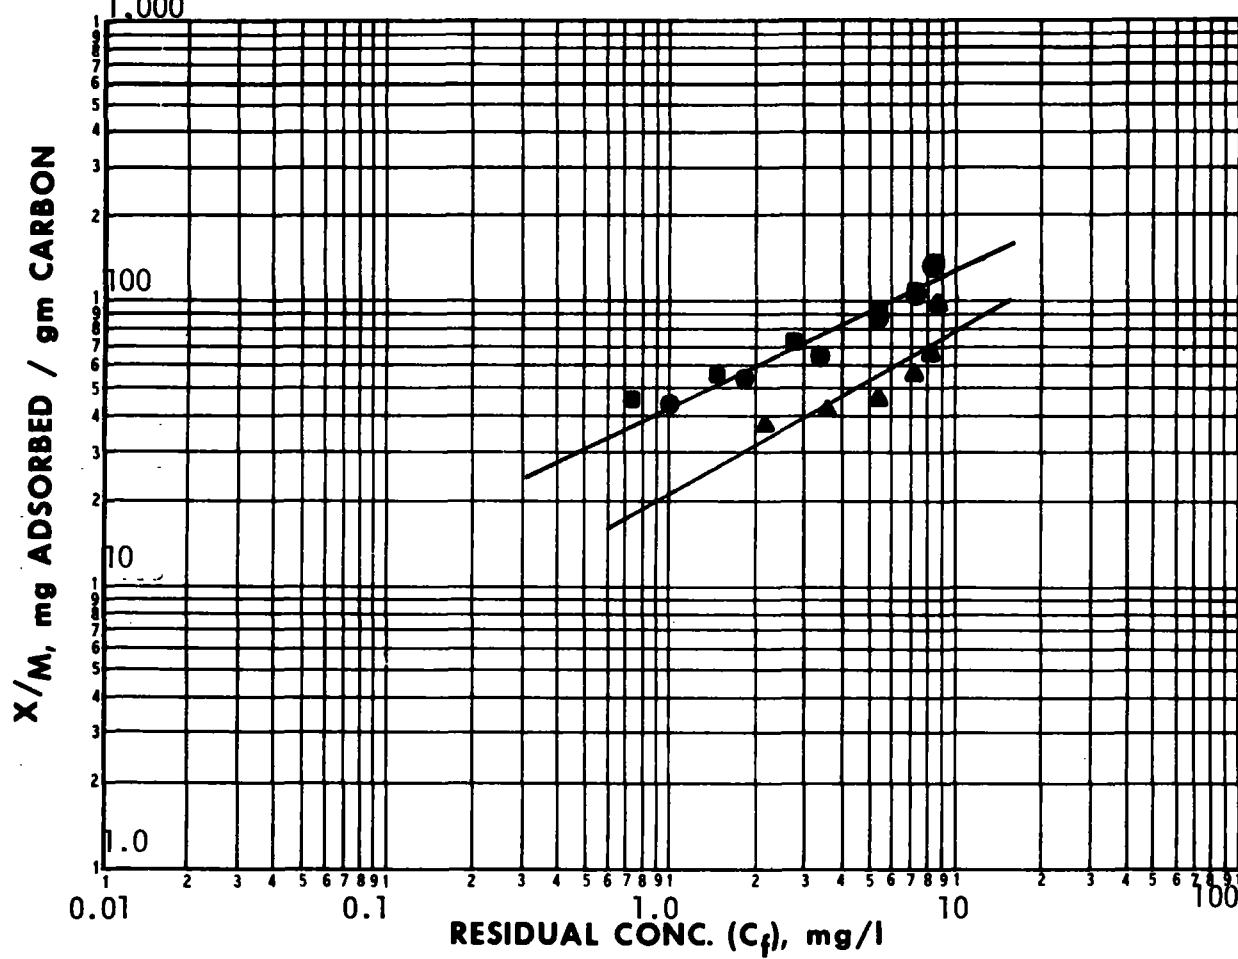

CARBON DOSE mg/l	\bullet pH = 3.0			\blacksquare pH = 7.0			\blacktriangle pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.88			9.95			9.89		
10	8.39	1.49	149	8.55	1.40	140	8.91	0.98	98
25	7.27	2.61	104	7.15	2.80	112	8.24	1.65	66
50	5.41	4.47	89	5.34	4.61	92	7.07	2.82	56
100	3.40	6.48	65	2.82	7.13	71	5.29	4.60	46
150	1.91	7.97	53	1.57	8.38	56	3.69	6.20	41
200	1.02	8.86	44	0.73	9.22	46	2.20	7.69	38

COMPOUND: Butylamine

STRUCTURE:

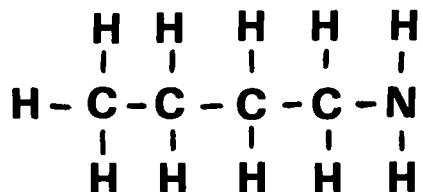

FORMULA: C₄H₁₁N **MOL. WT.** 73.14

FREUNDLICH PARAMETERS	pH			
	4	6	8	10
K				
1/n				
Corr. Coef. r				
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm			

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

C_f, mg/l

C ₀ , mg/l			

GRANULAR CARBON COLUMN


C ₀ , mg/l	

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS: Not adsorbed


COMPOUND: Butylamine

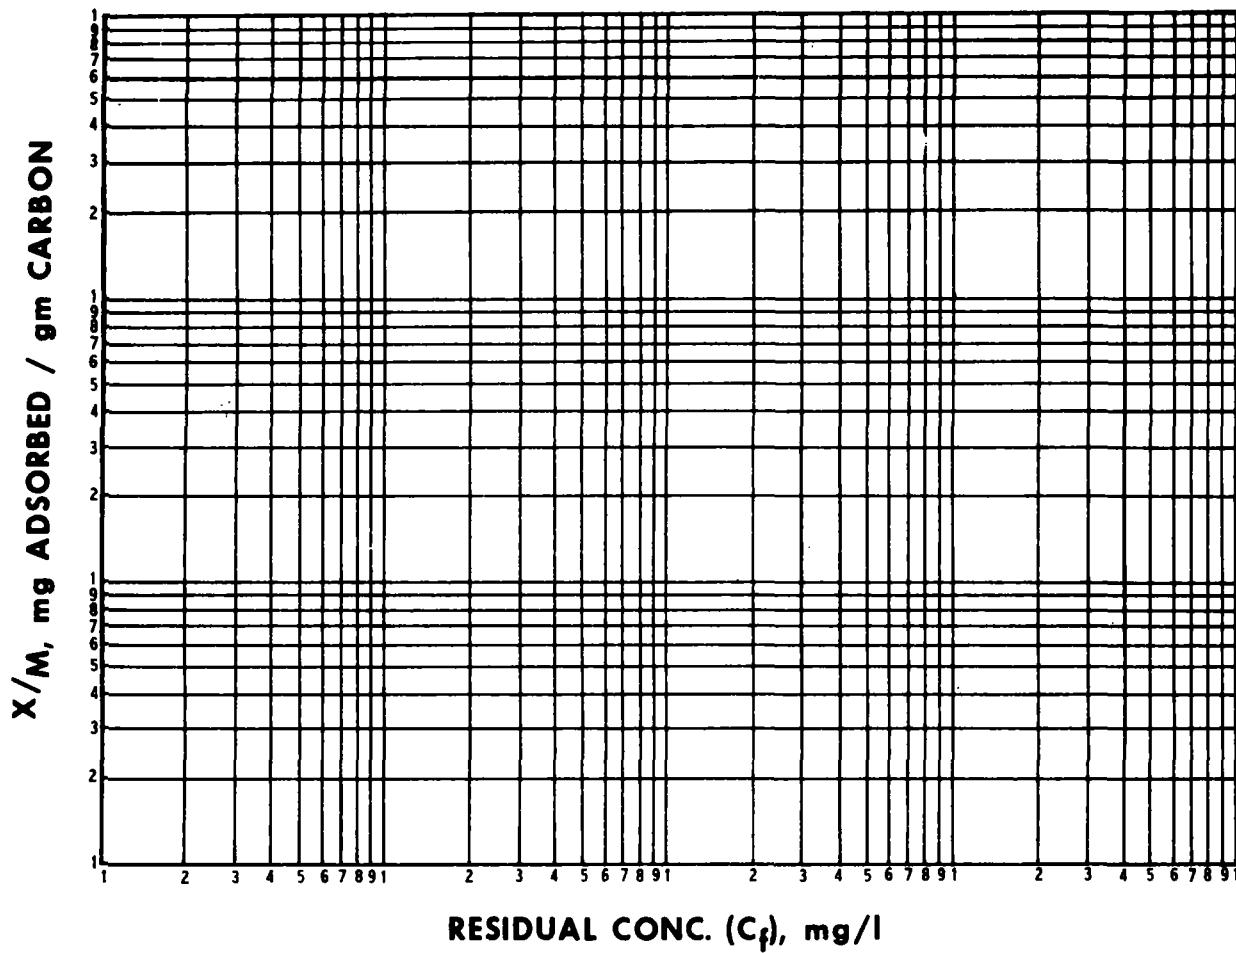

CARBON DOSE mg/l	pH = 3.0			pH = 7.0			pH = 9.0		
	C _f	C _o - C _f = X	X/M	C _f	C _o - C _f = X	X/M	C _f	C _o - C _f = X	X/M
0	18.3		15.8	16.8		15.2	17.7		16.8
5	16.8		17.4	17.7		16.2	19.8		17.7
10	17.7		15.5	16.1		14.9	16.1		14.6
25	16.1		19.8	18.6		16.8	17.7		17.1
50	15.8		18.6	16.4		17.1	17.7		17.1
100	16.4		16.1	17.7		15.5	15.5		15.5
150	17.7		16.1	16.4		14.9	16.1		14.6
200	15.5		16.1	17.7		14.9	16.1		14.6

COMPOUND: Butylbenzyl phthalate

STRUCTURE:

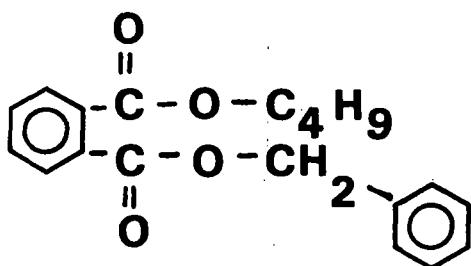

FORMULA: $\text{C}_{19}\text{H}_{20}\text{O}_4$

MOL. WT. 312.36

FREUNDLICH PARAMETERS	pH		
	5.3		
K	1520		
1/n	1.26		
Corr. Coef. r	0.86		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	1520		
0.1	84		
0.01	4.6		
0.001	0.3		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	11	220	4,000
0.1		20	390
0.01			36


C_o , mg/l	
1.0	0.7
0.1	1.2
0.01	2.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS:



COMPOUND: Butylbenzyl phthalate

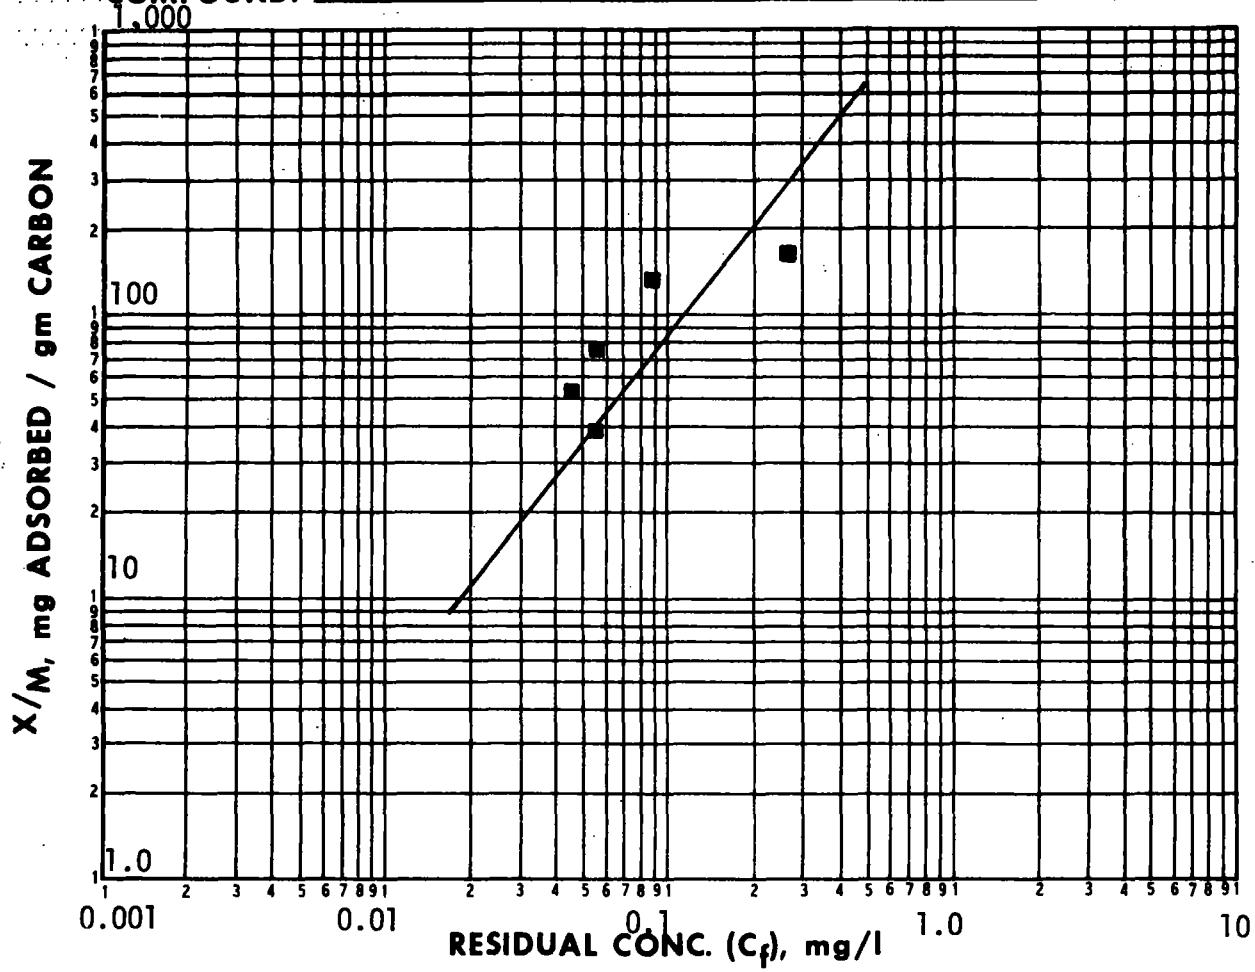

CARBON DOSE mg/l	$pH = 5.3$			$pH = 1.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.44					
1.0	0.27	0.170	170			
2.5	0.088	0.352	141			
5	0.057	0.383	76.6			
7.5	0.046	0.394	52.5			
20	0.040	0.400	20.0			
30	0.037	0.403	13.4			
40	0.026	0.414	10.4			

COMPOUND: N-Butyl phthalate

STRUCTURE:

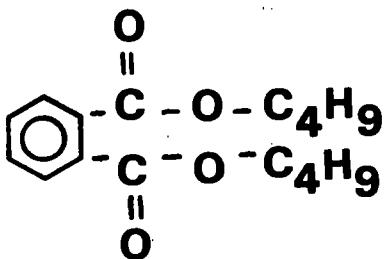

FORMULA: $\text{C}_{16}\text{H}_{22}\text{O}_4$ **MOL. WT.** 278.35

FREUNDLICH PARAMETERS	pH		
	3.0		
K	220		
1/n	0.45		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	610		
1.0	220		
0.1	77		
0.01	28		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	12	37	100
0.1		3.3	10
0.01			0.94


C_o , mg/l	
1.0	4.7
0.1	1.3
0.01	0.4

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 225 nm


REMARKS:

COMPOUND: N-Butyl phthalate

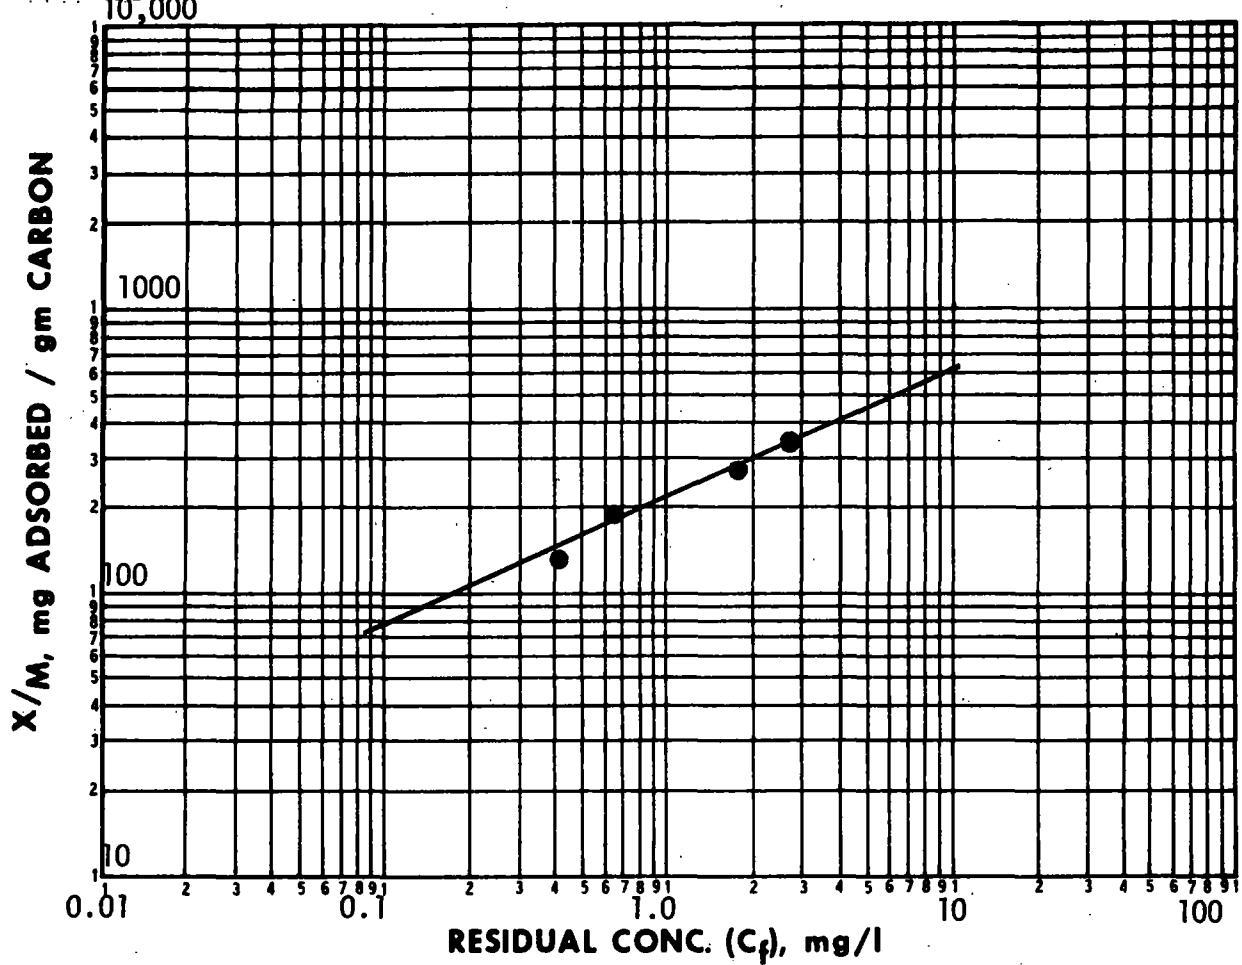

COMPOUND: Carbon tetrachloride

STRUCTURE:



FORMULA: CC14

MOL. WT. 153.82

FREUNDLICH PARAMETERS	pH		
	5.3		
K	11.1		
1/n	0.83		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	11		
0.1	1.6		
0.01	0.24		
0.001	0.04		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	550	4100	28,000
0.1		370	2,800
0.01			250


C_o , mg/l	
1.0	90
0.1	61
0.01	42

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:

COMPOUND: Carbon tetrachloride

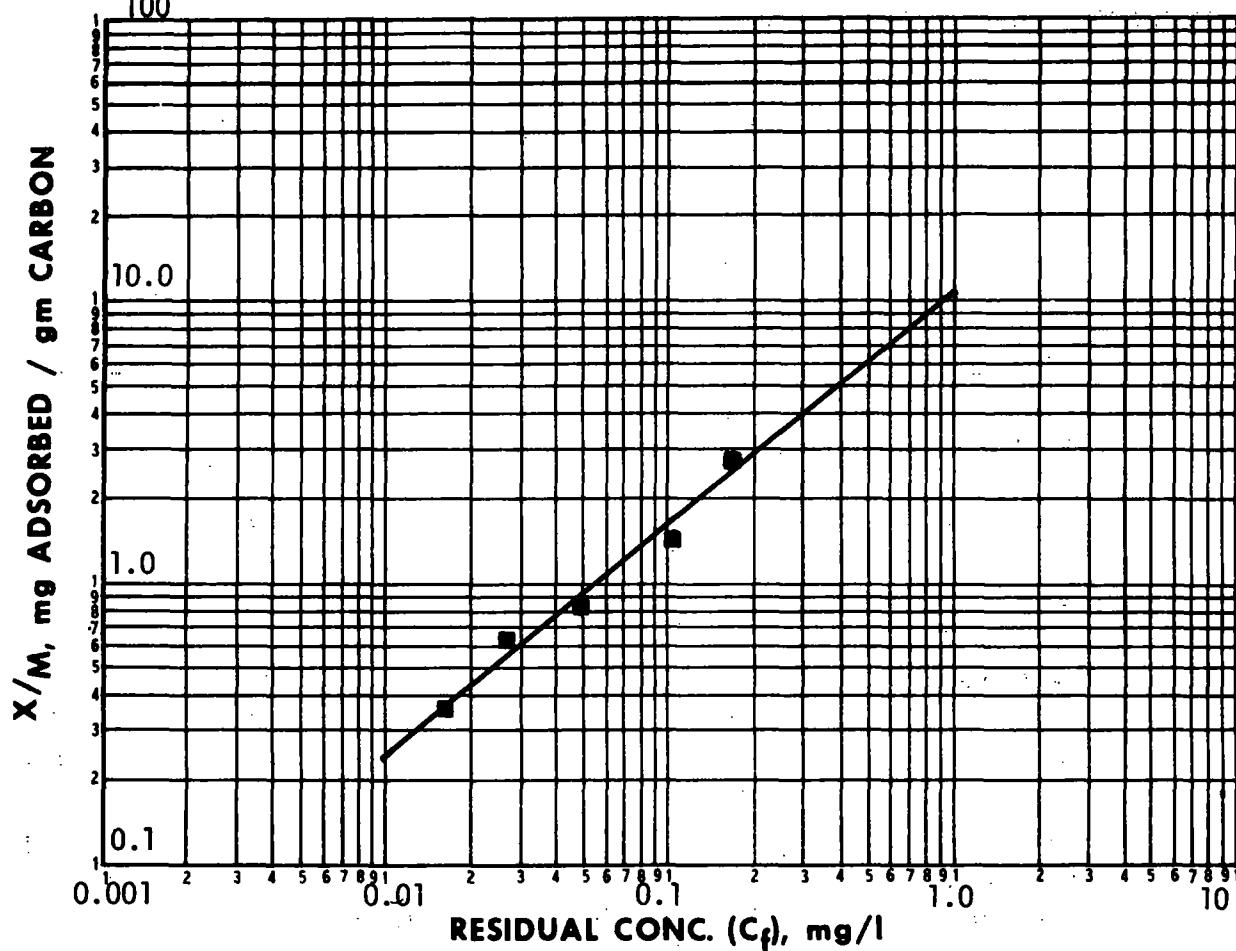

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.000								
288	0.177	0.823	2.85						
577	0.104	0.896	1.55						
1154	0.049	0.951	0.824						
1538	0.027	0.973	0.632						
2692	0.0170	0.983	0.365						

COMPOUND: Chlorobenzene

STRUCTURE:



FORMULA: C₆H₅Cl

MOL. WT. 112.56

FREUNDLICH PARAMETERS	pH		
	7.4		
K	91		
1/n	0.99		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	890		
1.0	91		
0.1	9.3		
0.01	0.95		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	92	970	9,400
0.1		88	930
0.01			84


C ₀ , mg/l	
1.0	11
0.1	11
0.01	11

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 209 nm

REMARKS:


COMPOUND: Chlorobenzene

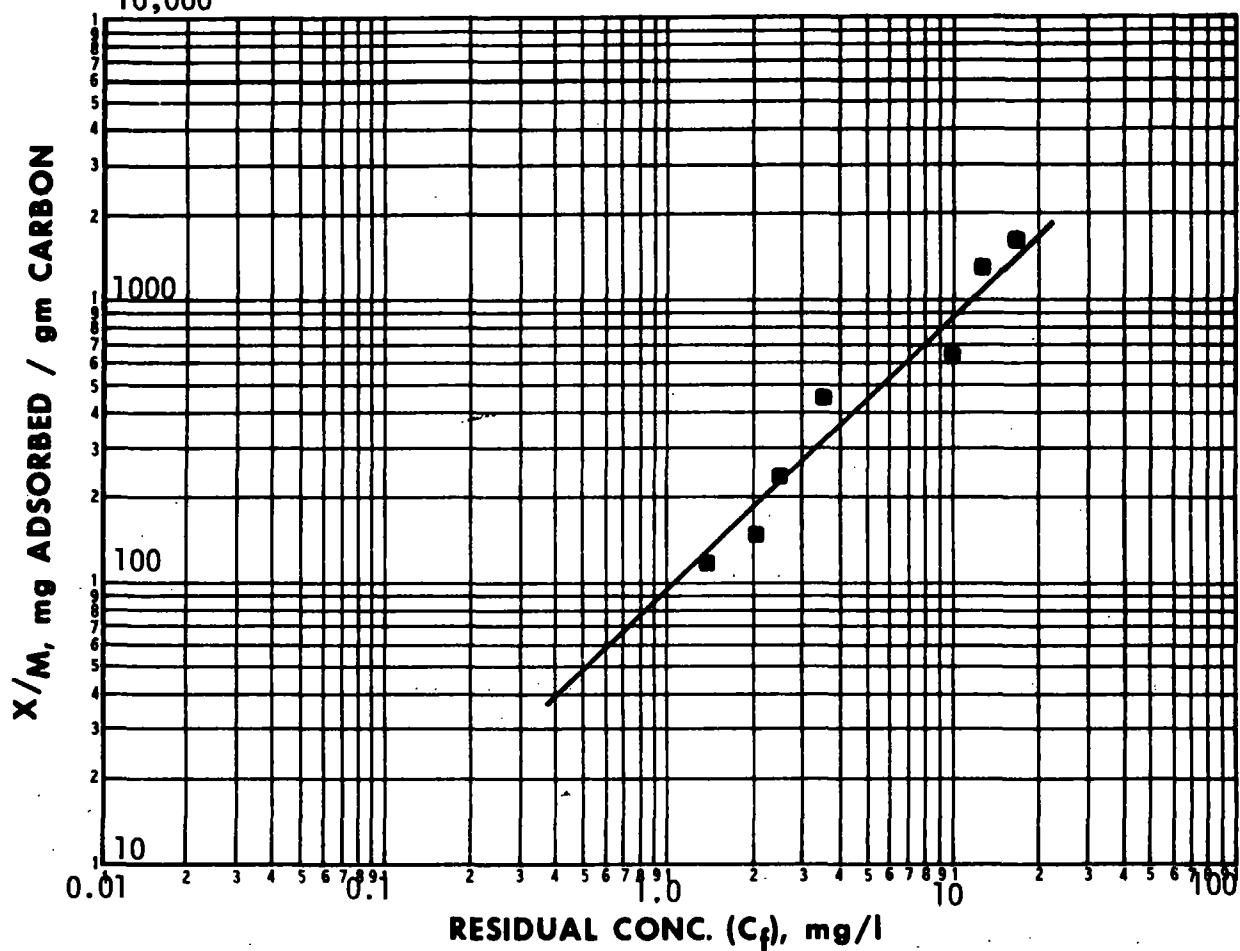

CARBON DOSE mg/l	$\blacksquare \text{ pH}=7.4$			$\text{pH}=$			$\text{pH}=$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	25.9								
5	17.4	8.50	1700						
10	13.13	12.77	1277						
25	10.16	15.74	630						
50	3.61	22.29	446						
100	2.49	23.41	234						
150	2.06	23.84	159						
200	1.40	24.5	123						

COMPOUND: Chlordane

STRUCTURE:

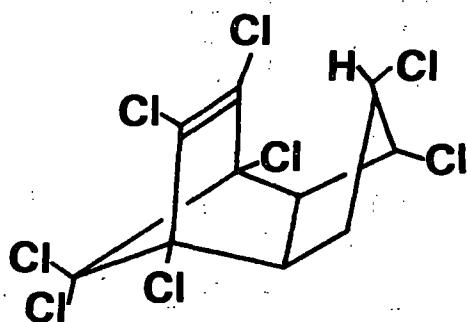

FORMULA: $C_{10}H_6Cl_8$

MOL. WT. 409.80

FREUNDLICH PARAMETERS	pH		
	5.3		
K	245		
1/n	0.38		
Corr. Coef. r	0.95		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	245		
0.1	102		
0.01	43		
0.001	18		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

GRANULAR CARBON COLUMN

C_o , mg/l	0.1	0.01	0.001
1.0	8.8	23	56
0.1		2.1	5.6
0.01			0.5


C_o , mg/l	
1.0	4.1
0.1	1.0
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS:


COMPOUND: Chlordane

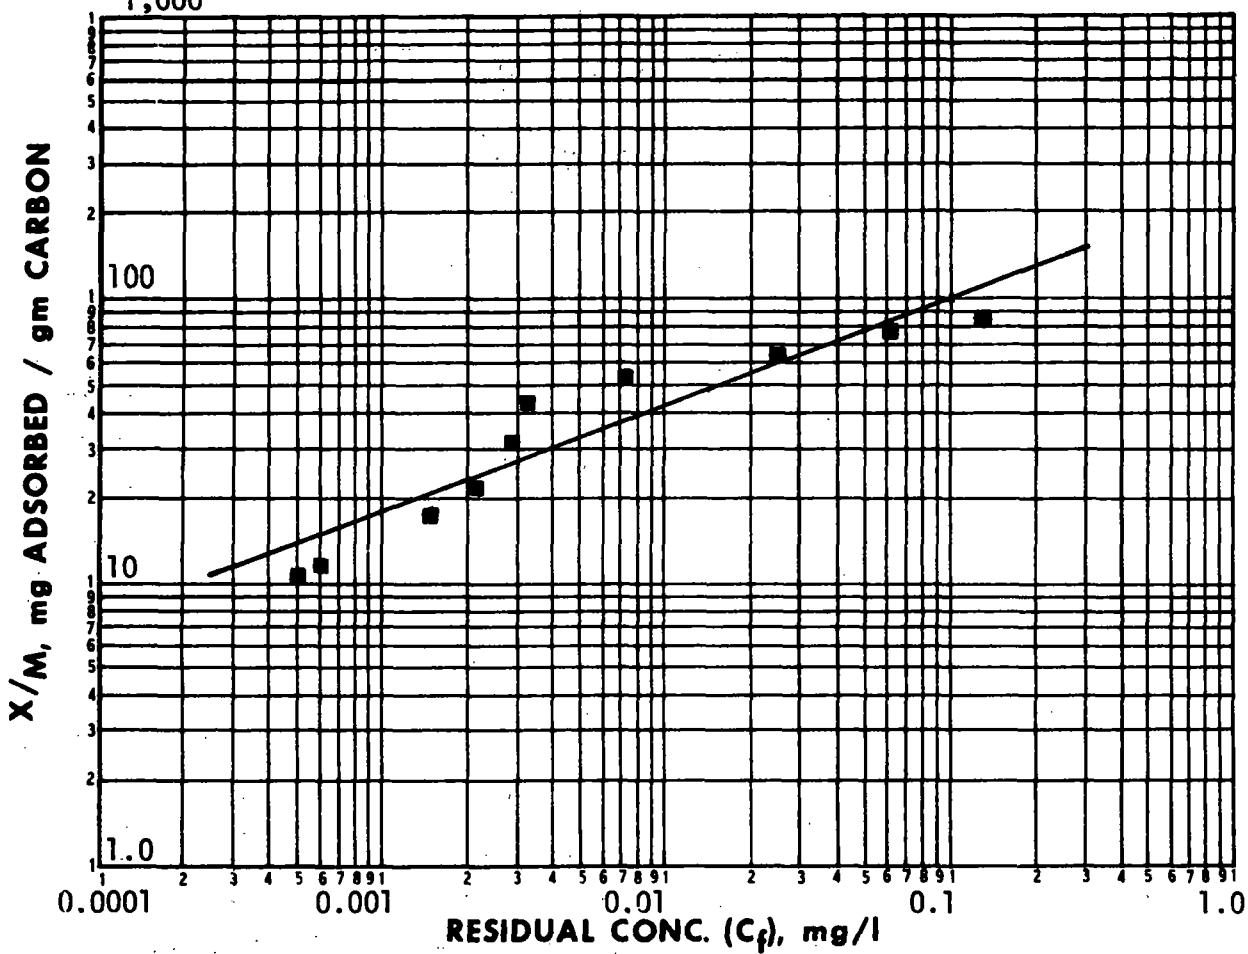

CARBON DOSE mg/l	$\text{pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M
0	0.219								
1.0	0.132	0.087	87.0						
2.0	0.061	0.158	79.0						
3.0	0.026	0.193	64.3						
4.0	0.0071	0.212	53.0						
5.0	0.0032	0.216	43.2						
7.0	0.0029	0.216	30.9						
10	0.0021	0.217	21.7						
12	0.0016	0.217	18.1						
17.5	0.0006	0.218	12.5						
20	0.0005	0.218	10.9						

COMPOUND: Chloroethane

STRUCTURE:



FORMULA: C₂H₅Cl **MOL. WT.** 64.52

FREUNDLICH PARAMETERS	pH		
	5.3		
K	0.59		
1/n	0.95		
Corr. Coef. r	1.0		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	0.59		
0.1	0.07		
0.01	0.007		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	14,000	> 100,000	> 100,000
0.1		12,000	> 100,000
0.01			11,000


C ₀ , mg/l	
1.0	1700
0.1	1400
0.01	1400

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:


COMPOUND: Chloroethane

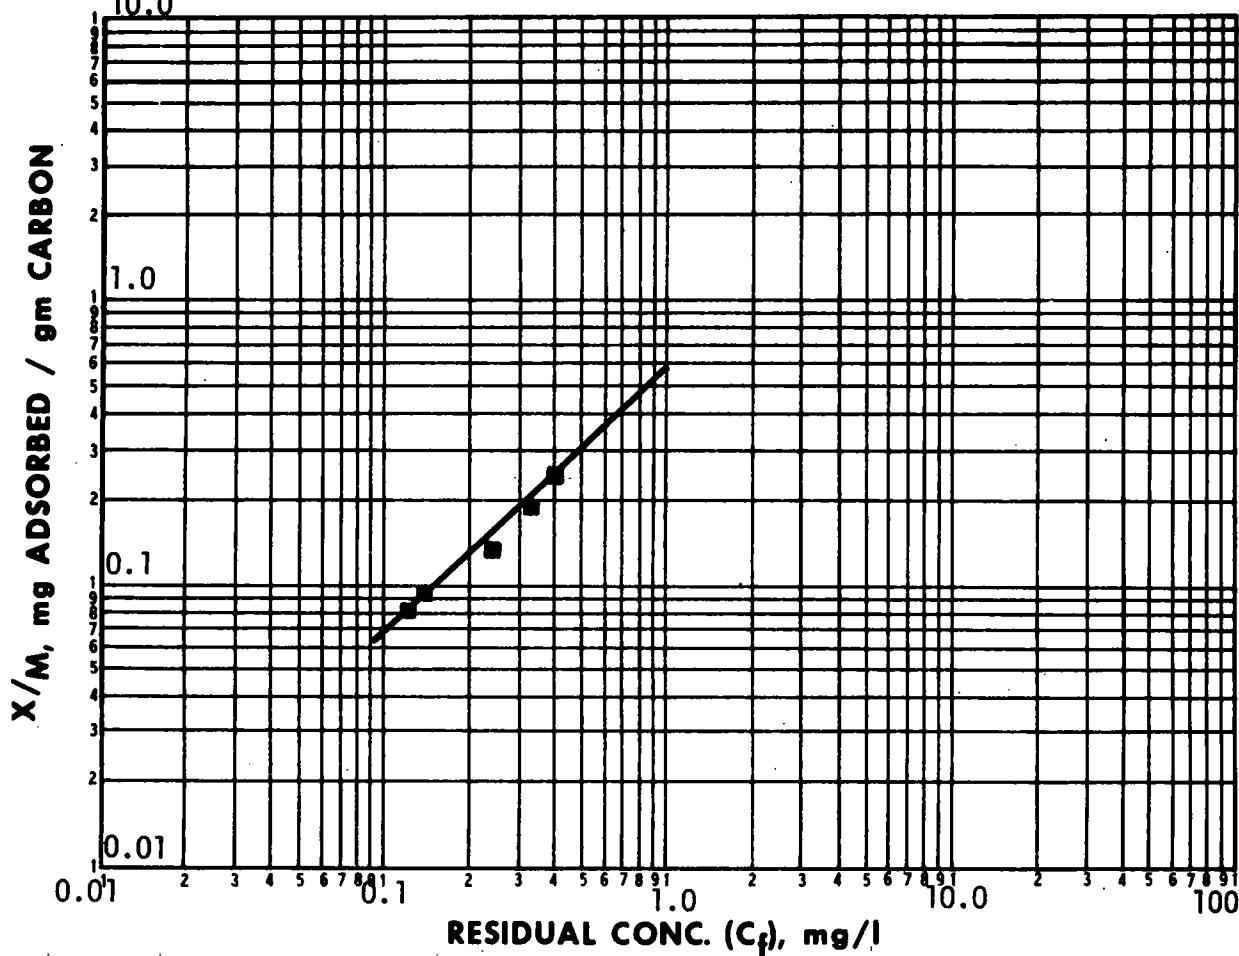

CARBON DOSE mg/l	■ pH = 5.3			pH =			pH =		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.06								
2692	0.400	0.660	0.25						
3846	0.311	0.749	0.195						
5769	0.232	0.828	0.144						
9615	0.141	0.919	0.0956						
11,538	0.129	0.931	0.0807						

COMPOUND: Bis(2-chloroethoxy)methane

STRUCTURE:

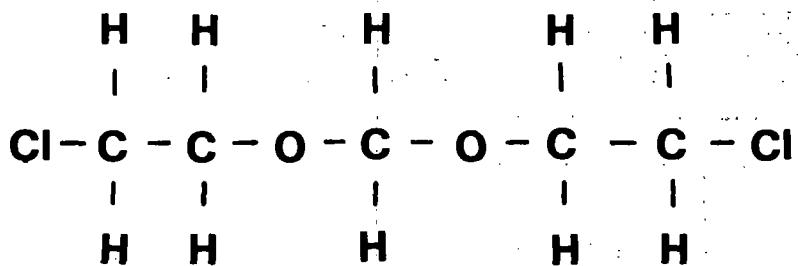

FORMULA: C₅H₁₀O₂Cl₂

MOL. WT. 173.1

FREUNDLICH PARAMETERS	pH		
	5.8		
K	11		
1/n	0.65		
Corr. Coef. r	0.91		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10.0	50		
1.0	11		
0.1	2.6		
0.01	0.6		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	350	1,700	7,800
0.1		160	770
0.01			70


C ₀ , mg/l	
1.0	88
0.1	38
0.01	17

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Carbon

REMARKS:


COMPOUND: Bis(2-chloroethoxy)methane

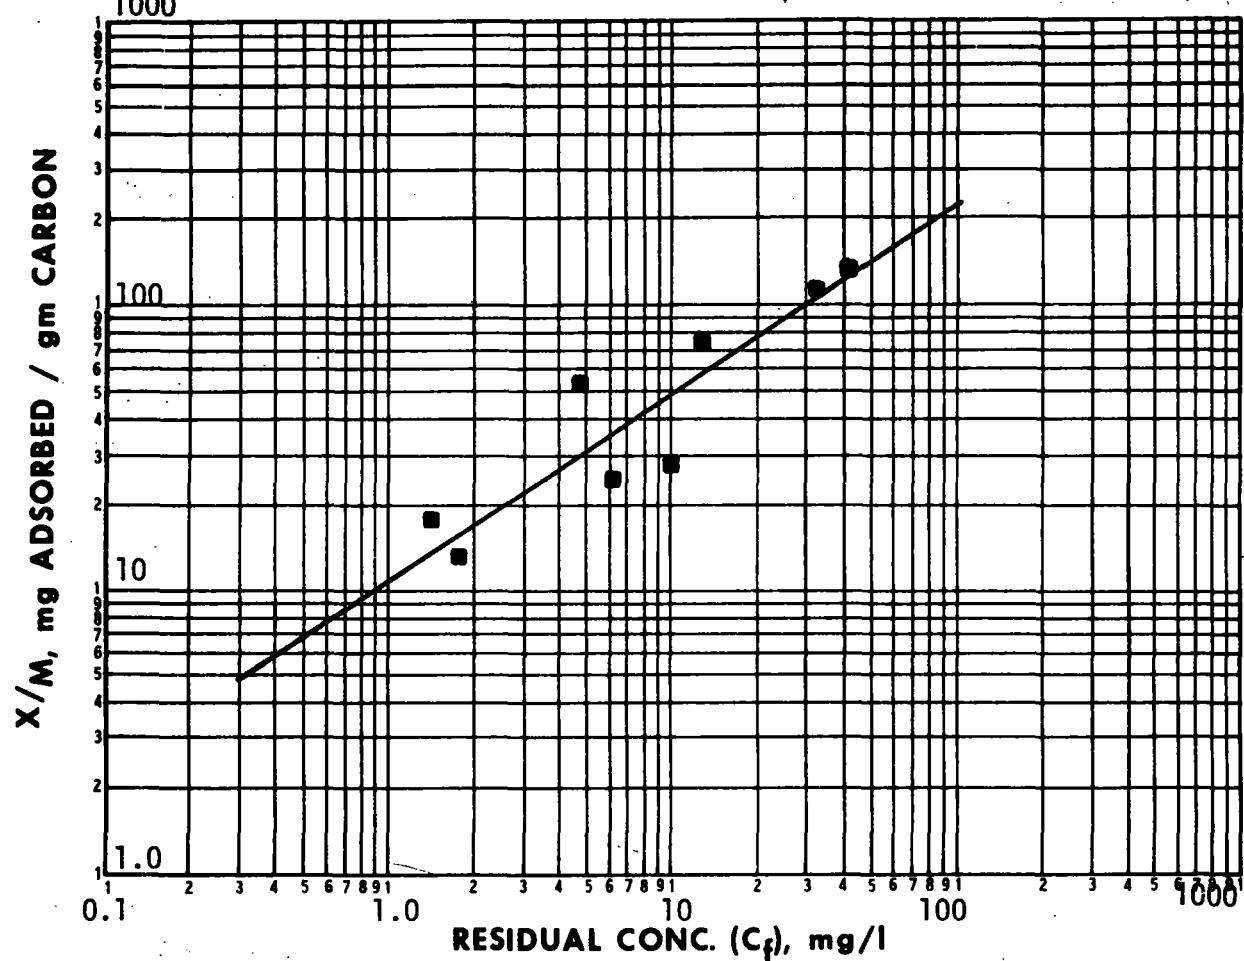

CARBON DOSE mg/l	$\bullet \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	54.37								
96	41.11	13.26	138.4						
191	32.11	22.26	116.6						
573	12.85	41.52	72.52						
951	4.80	49.57	52.15						
1530	10.01	44.36	29.06						
1916	6.07	48.30	25.21						
2870	1.49	52.88	18.40						
3830	1.80	52.57	13.72						

COMPOUND: Bis(2-chloroethyl)ether

STRUCTURE:

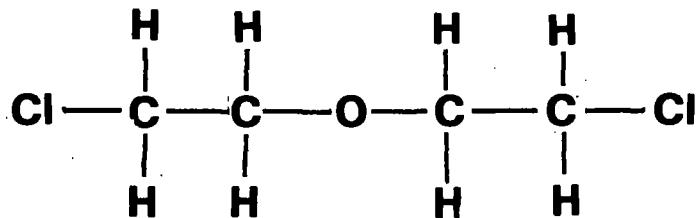

FORMULA: C₄H₈OCl₂

MOL. WT. 143.02

FREUNDLICH PARAMETERS	pH		
K	0.086		
1/n	1.84		
Corr. Coef. r	0.89		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10.0	6.0		
1.0	0.086		
0.1	0.001		
0.01	0.00002		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	>100,000	>100,000	>100,000
0.1		>100,000	>100,000
0.01			>100,000

GRANULAR CARBON COLUMN


C ₀ , mg/l	
1.0	11,600
0.1	100,000
0.01	>100,000

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Carbon

REMARKS:


COMPOUND: Bis(2-chloroethyl)ether

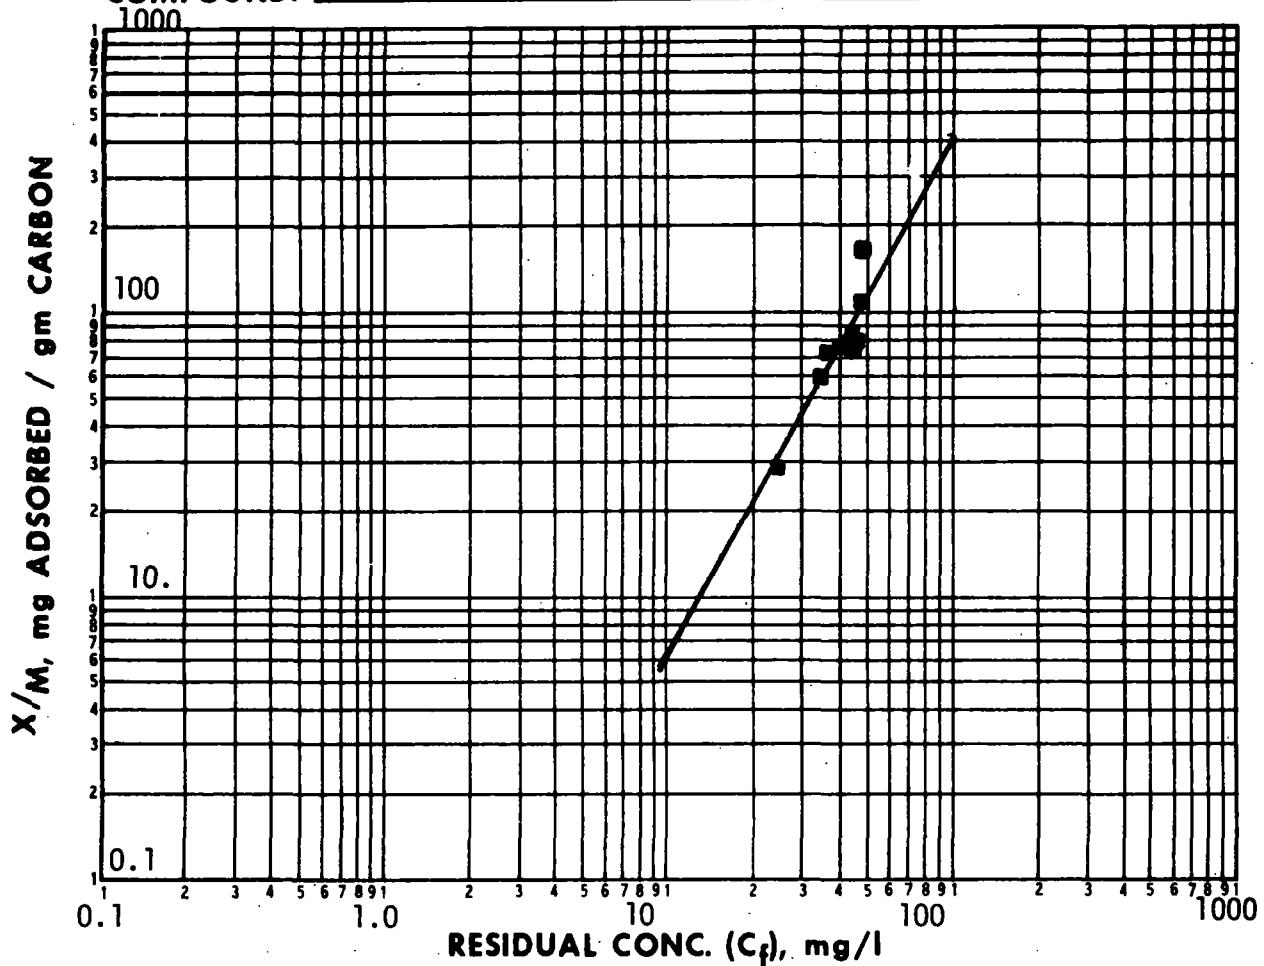

CARBON DOSE mg/l	■ pH= 5.3			pH=			pH=		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	50.26								
9.12	48.68	1.58	173						
22.79	47.73	2.53	111						
45.58	46.62	3.64	79.9						
68.37	45.36	4.90	71.7						
91.16	42.67	7.59	83.3						
113.95	41.56	8.70	76.4						
137.11	39.67	10.59	77.2						
182.32	37.29	12.97	71.1						
274.22	33.97	16.29	59.4						
914.08	23.54	26.72	29.2						

COMPOUND: 2-Chloroethyl vinyl ether

STRUCTURE:

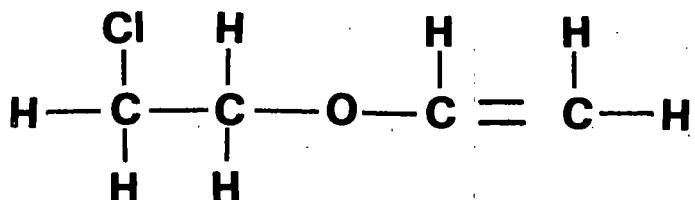

FORMULA: C₄H₇OCl

MOL. WT. 106.55

FREUNDLICH PARAMETERS	pH		
	5.4		
K	3.9		
1/n	0.80		
Corr. Coef. r	0.94		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10.0	25		
1.0	3.9		
0.1	0.6		
0.01	0.1		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	1500	10,000	64,000
0.1		920	6,400
0.01			580


C ₀ , mg/l	
1.0	260
0.1	170
0.01	100

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Carbon

REMARKS:


COMPOUND: 2-Chloroethyl vinyl ether

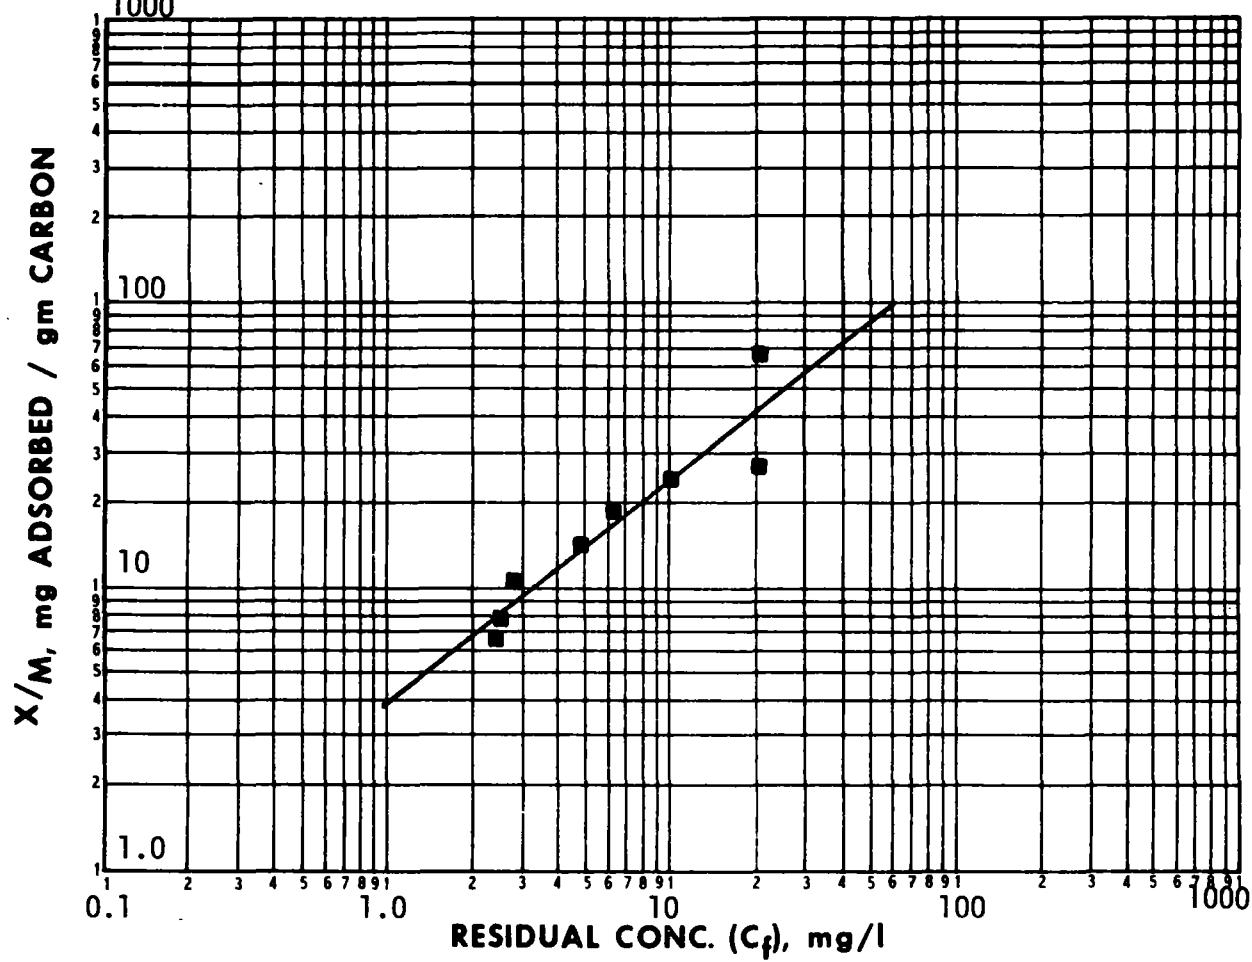

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\blacksquare \text{ pH} =$			$\blacksquare \text{ pH} =$		
	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M
0	33.04								
191	20.35	12.69	66.50						
477	20.04	13.00	27.25						
951	10.09	22.95	24.14						
1430	6.24	26.80	18.72						
1916	4.92	28.12	14.68						
2870	2.78	30.26	10.53						
3830	2.48	30.56	7.98						
4960	2.28	30.76	6.20						

COMPOUND: Chloroform

STRUCTURE:



FORMULA: CHCl_3 **MOL. WT.** 119.38

FREUNDLICH PARAMETERS	pH		
	5.3		
K	2.6		
1/n	0.73		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	2.6		
0.1	0.48		
0.01	0.09		
0.001	0.02		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	1900	11,000	50,000
0.1		1,000	6,000
0.01			540


C_o , mg/l	
1.0	380
0.1	210
0.01	111

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:


COMPOUND: Chloroform

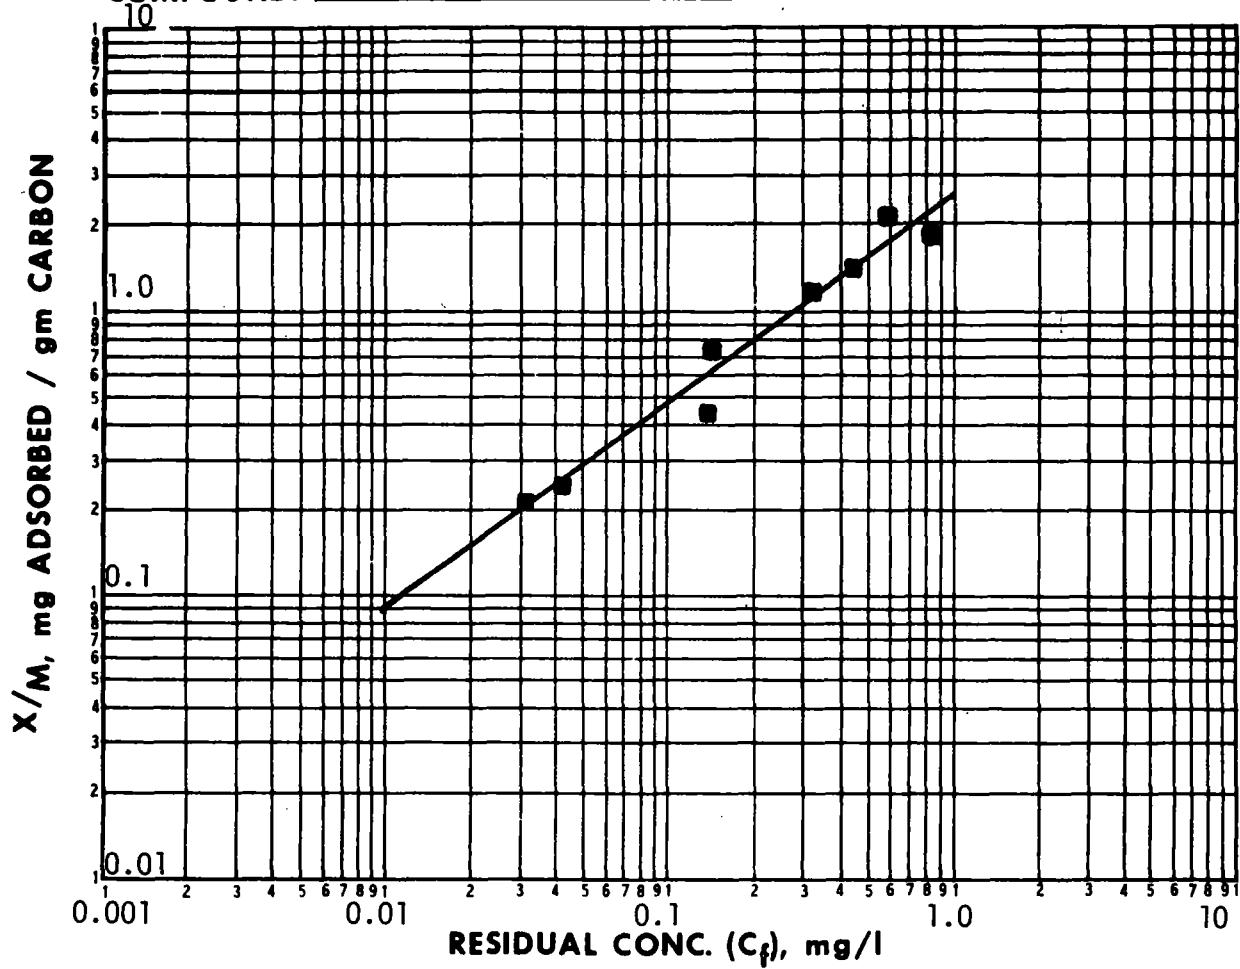

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.000								
96	0.820	0.180	1.87						
192	0.596	0.404	2.10						
385	0.428	0.573	1.49						
577	0.314	0.686	1.19						
1154	0.149	0.851	0.738						
1923	0.145	0.855	0.445						
3846	0.041	0.959	0.249						
4615	0.030	0.970	0.210						

COMPOUND: Bis(2-chloroisopropyl)ether

STRUCTURE:

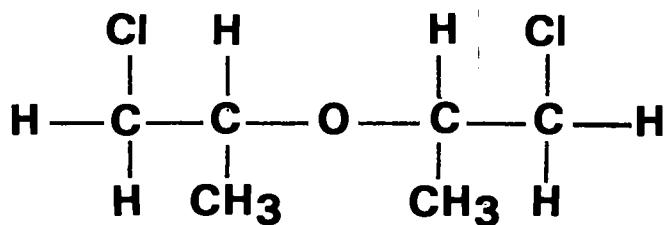

FORMULA: $\text{C}_6\text{H}_{12}\text{OCl}_2$

MOL. WT. 171.07

FREUNDLICH PARAMETERS	pH		
	5.4		
K	24		
1/n	0.57		
Corr. Coef. r	0.91		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10.0	88.0		
1.0	24		
0.1	6.3		
0.01	1.7		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	140	580	2,200
0.1		55	220
0.01			20


GRANULAR CARBON COLUMN

C_o , mg/l	
1.0	43
0.1	16
0.01	5.9

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Carbon


REMARKS:

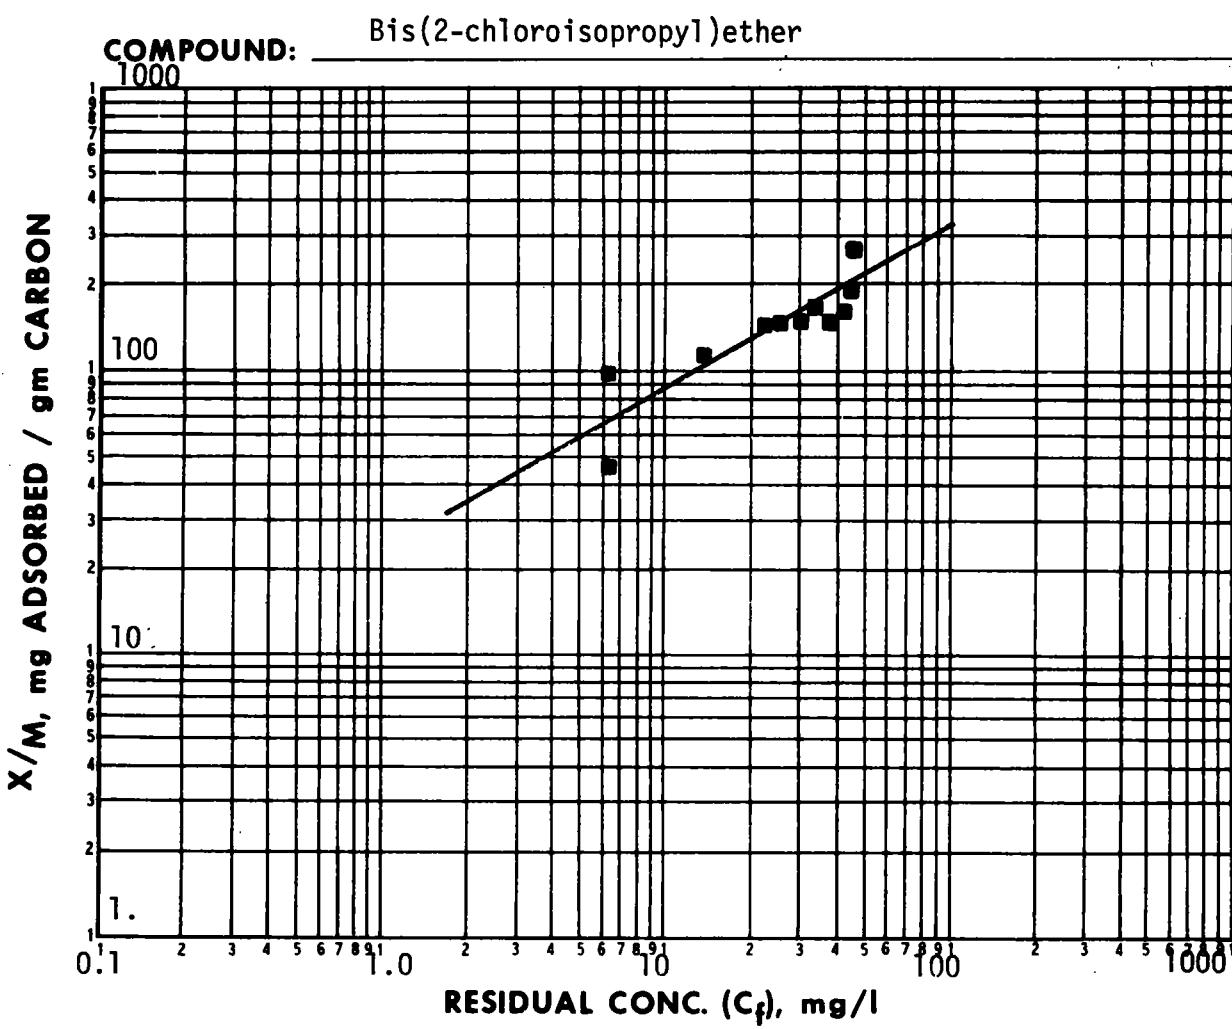

CARBON DOSE mg/l	■ pH = 5.4				pH =				pH =			
	C_f	$C_o - C_f = X$	X/M		C_f	$C_o - C_f = X$	X/M		C_f	$C_o - C_f = X$	X/M	
0	48.43											
9.1	45.94	2.49	273									
22.8	44.00	4.43	194.4									
45.6	40.81	7.62	167.2									
68.4	37.62	10.81	158.1									
91.2	32.64	15.79	173.2									
114	30.14	18.29	160.5									
137	26.68	21.75	158.6									
182	21.55	26.88	147.4									
274	14.49	33.94	123.8									
457	6.45	41.98	91.85									
914	6.17	42.26	46.23									

COMPOUND: Parachlorometa cresol

STRUCTURE:



FORMULA: C₇H₇C₁₀ **MOL. WT.** 142.59

FREUNDLICH PARAMETERS	pH		
	3.0	5.5	9.0
K	122	124	99
1/n	0.29	0.16	0.42
Corr. Coef. r	0.90	0.87	0.97
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	122	124	99
0.1	63	85	38
0.01	32	58	14
0.001	17	40	5.5

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	11	17	25
0.1		1.6	2.5
0.01			0.2


C ₀ , mg/l	
1.0	8.1
0.1	1.2
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 225.9 nm.

REMARKS:

COMPOUND: Parachlorometa cresol

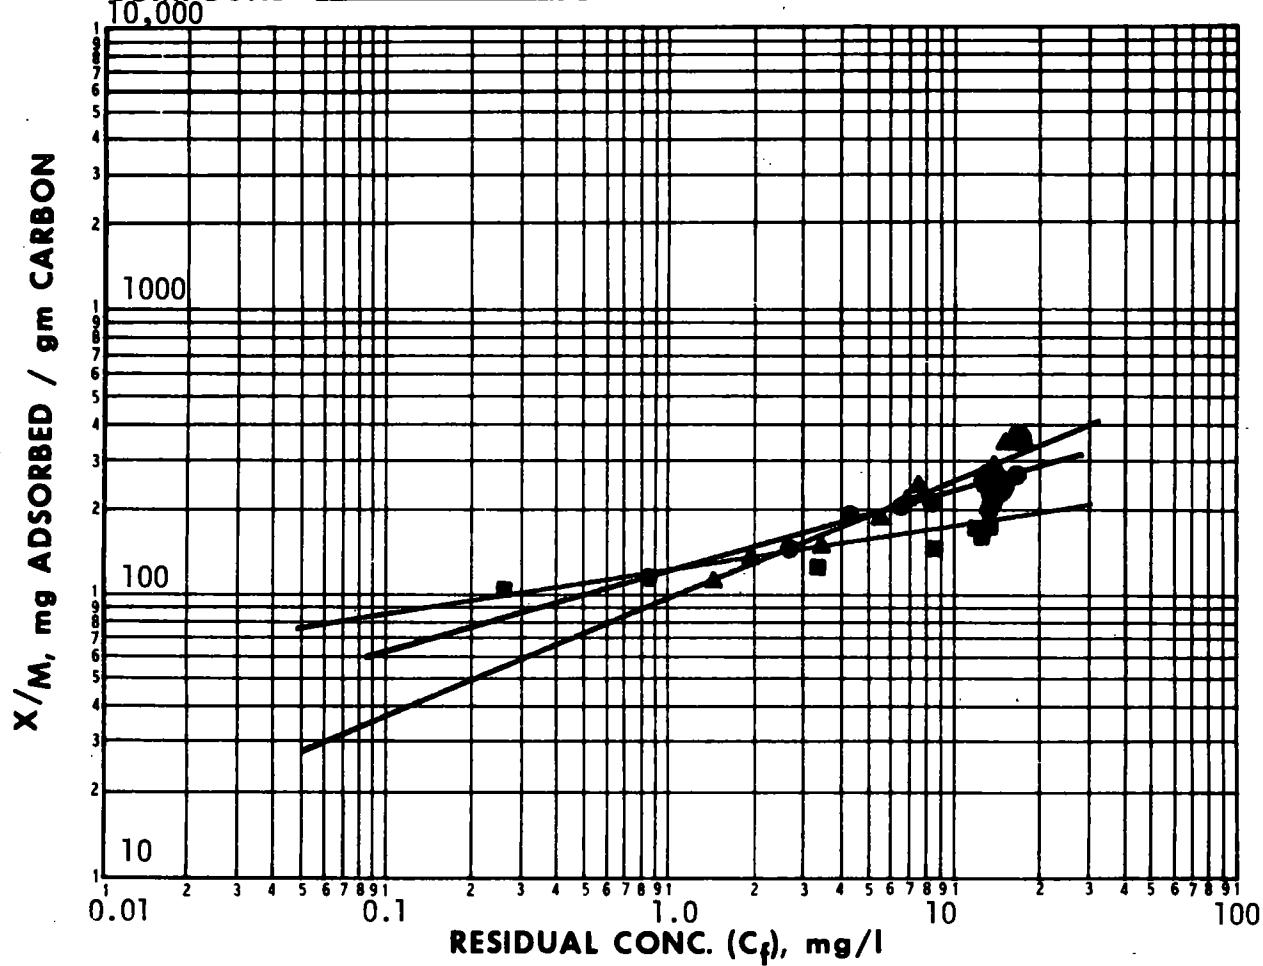

CARBON DOSE mg/l	● pH = 3.0			■ pH = 5.5			▲ pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	18.92				16.34			19.90	
2.5	17.96	0.96	384						
5.0	17.52	1.40	280	15.13	1.21	242	18.12	1.78	356
7.5	16.96	1.96	261						
10	16.25	2.67	267	14.19	2.15	215	16.35	3.55	355
20	13.64	5.28	264	12.88	3.46	173	14.03	5.87	294
25	13.92	5.00	200	11.92	4.42	177	13.94	5.96	238
50	8.50	10.42	208	8.55	7.79	156	7.40	12.50	250
60	6.73	12.19	203				6.95	12.95	216
75	4.26	14.66	196				5.43	14.47	193
100	2.82	16.10	161	3.22	13.12	131	3.38	16.52	165
150	0.86	18.06	120	0.27	16.07	107	1.52	18.38	122
200							1.10	18.80	94

COMPOUND: 2-Chloronaphthalene

STRUCTURE:



FORMULA: C₁₀H₇Cl **MOL. WT.** 162.62

FREUNDLICH PARAMETERS	pH		
	5.5		
K	280		
1/n	0.46		
Corr. Coef. r	0.96		

INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	280		
0.1	96		
0.01	33		
0.001	11		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l


C _o , mg/l	0.1	0.01	0.001	C _o , mg/l	
1.0	9.3	29	86	1.0	3.6
0.1		2.7	8.5	0.1	1.0
0.01			0.8	0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 224.5 nm.

REMARKS:


COMPOUND: 2-Chloronaphthalene

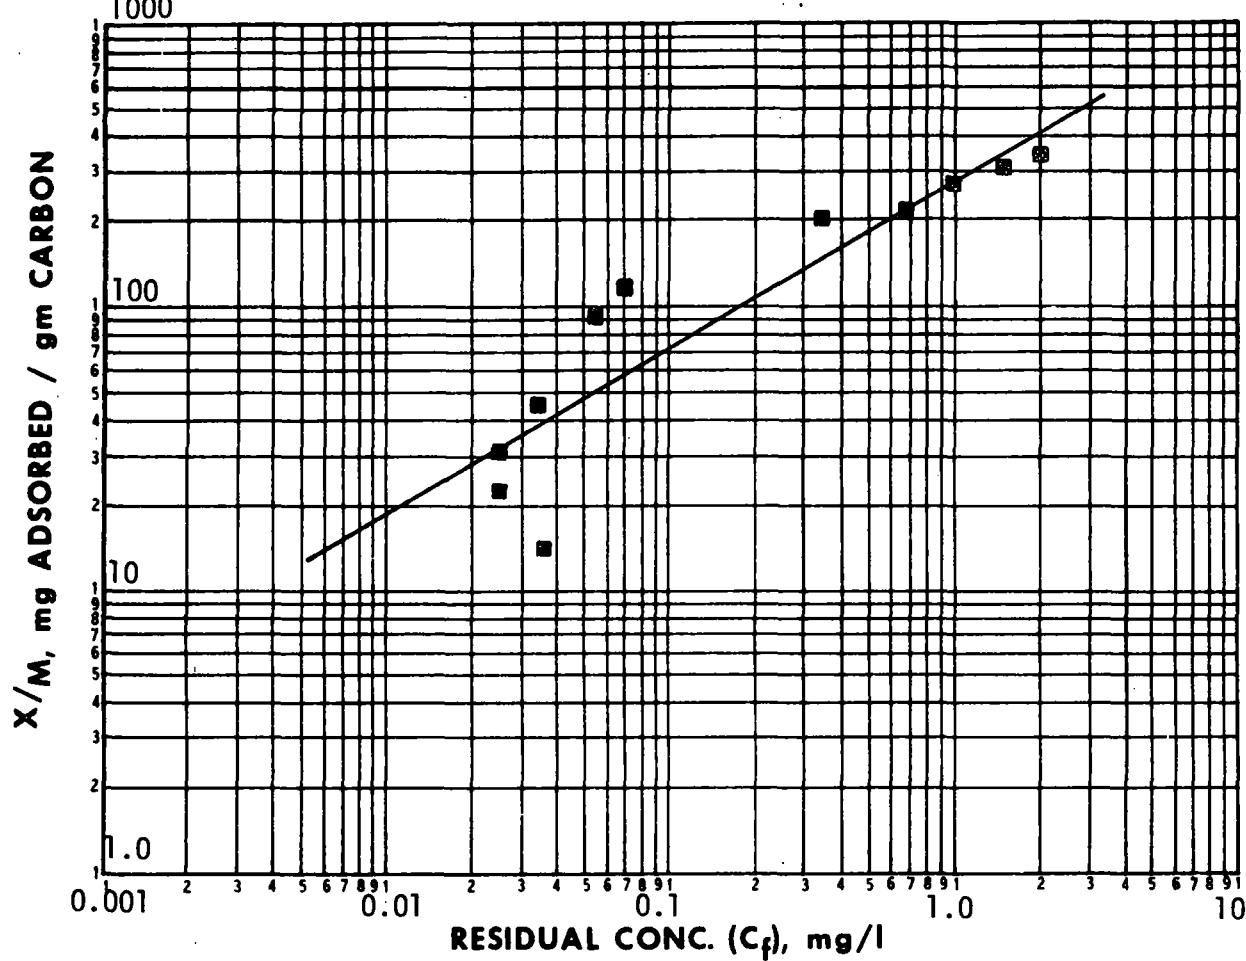

CARBON DOSE mg/l	■ pH = 5.5			pH =			pH =		
	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0	2.36								
1.0	2.01	0.35	350						
2.5	1.59	0.77	308						
5.0	0.98	1.38	27.6						
7.5	0.68	1.68	224						
10	0.34	2.02	202						
20	0.07	2.29	114						
25	0.05	2.31	92						
50	0.03	2.33	47						
75	0.02	2.34	31						

COMPOUND: 1-Chloro-2-nitrobenzene

STRUCTURE:



FORMULA: C₆H₄ClNO₂ **MOL. WT.** 157.6

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	130		
1/n	0.46		
Corr. Coef. r	0.97		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	370		
1.0	130		
0.1	46		
0.01	16		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	20	64	180
0.1		5.8	18
0.01			1.7

GRANULAR CARBON COLUMN


C ₀ , mg/l	
1.0	7.7
0.1	2.2
0.01	0.6

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 260 nm

REMARKS:


COMPOUND: 1-Chloro-2-nitrobenzene

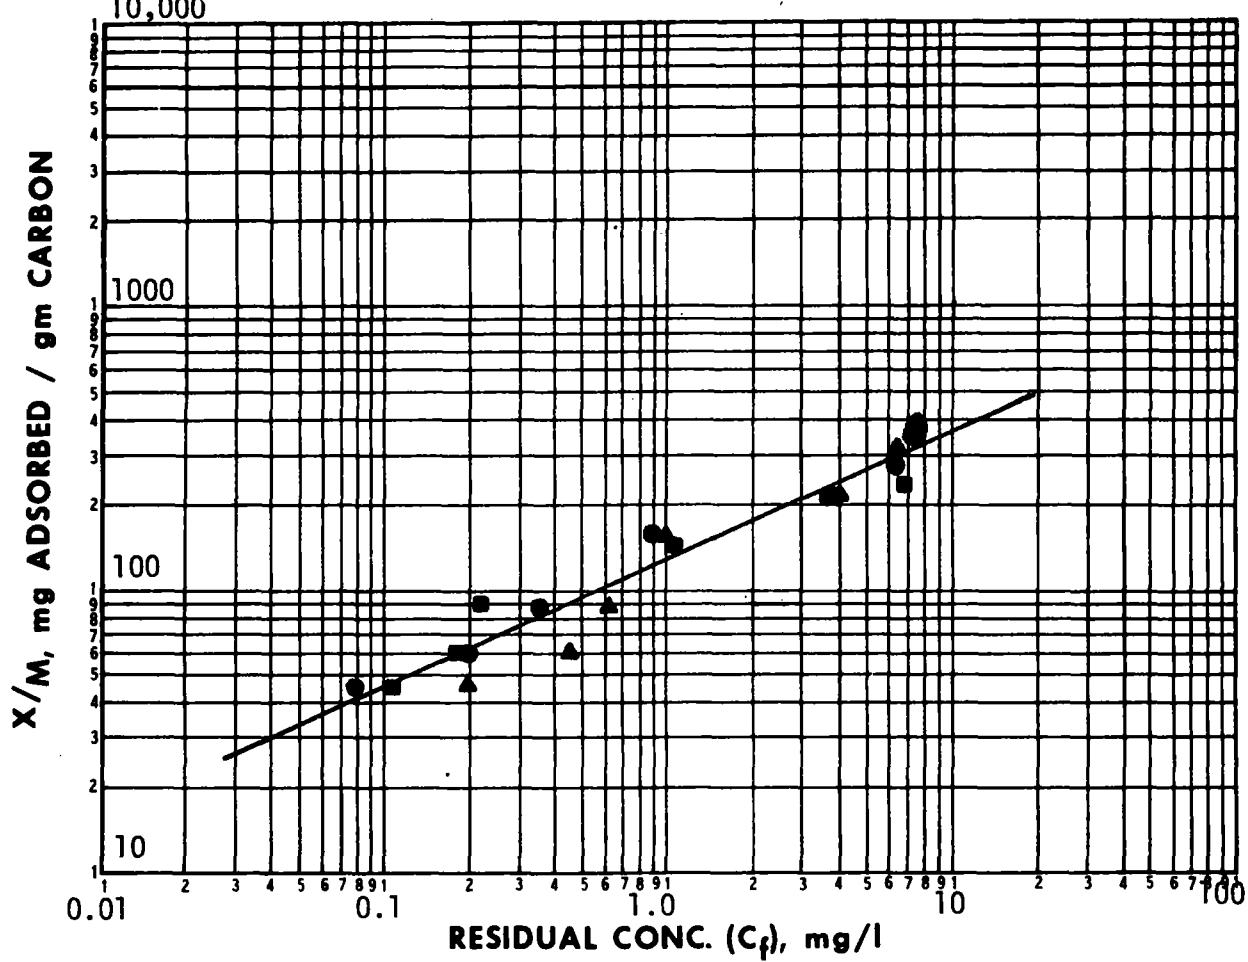

CARBON DOSE mg/l	● pH = 3.0			■ pH = 7.0			▲ pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.26			9.20			9.43		
5	7.43	1.83	366	7.36	1.84	368	7.50	1.93	386
10	6.39	2.87	287	6.86	2.34	234	6.30	3.13	313
25	3.81	5.45	218	3.86	5.34	214	4.02	5.41	216
50	0.90	8.36	167	1.13	8.07	161	1.02	8.41	168
100	0.37	8.89	89	0.22	8.98	90	0.61	8.82	88
150	0.20	9.06	60	0.18	9.02	60	0.46	8.97	60
200	0.08	9.18	46	0.11	9.09	45	0.20	9.23	46

COMPOUND: 2-Chlorophenol

STRUCTURE:



FORMULA: C₆H₅OCl **MOL. WT.** 125.56

FREUNDLICH PARAMETERS	pH		
	All Data Pooled		
K	51.0		
1/n	0.41		
Corr. Coef. r	0.97		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	51		
0.1	20		
0.01	7.9		
0.001	3.1		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	45	130	330
0.1		12	33
0.01			3.0


GRANULAR CARBON COLUMN

C ₀ , mg/l	
1.0	20
0.1	5.0
0.01	1.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 273.5 nm.


REMARKS:

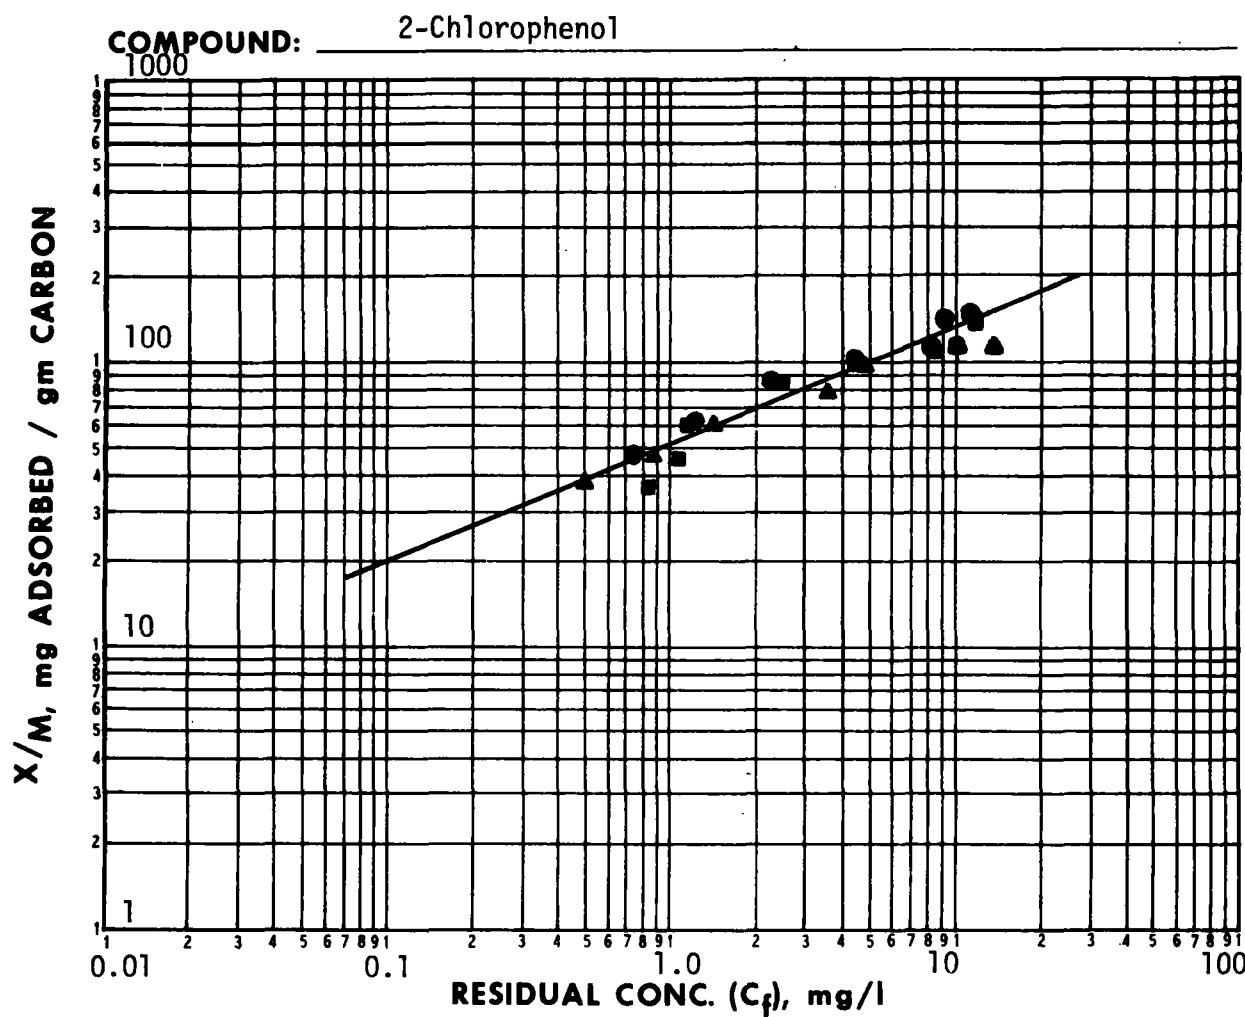

CARBON DOSE mg/l	● pH = 3.0			■ pH = 5.8			▲ pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	20.00				19.32			19.61	
50	12.16	7.84	157	12.10	7.22	144	13.51	6.10	122
75	9.14	10.86	145	10.22	9.10	121	10.40	9.21	123
100	8.12	11.88	119	8.28	11.04	110	8.38	11.23	112
150	4.50	15.50	103	4.42	14.90	99.3	4.88	14.73	98.2
200	2.34	17.76	88.3	2.54	16.78	83.9	3.66	15.95	79.8
300	1.30	18.70	62.3	1.24	18.08	60.3	1.48	18.13	60.4
400	0.76	19.24	48.1	1.10	18.22	45.6	0.89	18.72	46.8
500				0.82	18.50	37.0	0.50	19.11	38.2

COMPOUND: 4-Chlorophenyl phenyl ether

STRUCTURE:



FORMULA: C₁₂H₉OCl **MOL. WT.** 204.66

FREUNDLICH PARAMETERS	pH		
	5.3		
K	111		
1/n	0.26		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	111		
0.1	61		
0.01	33		
0.001	18		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	15	30	55
0.1		2.7	5.4
0.01			0.5


C ₀ , mg/l	
1.0	9.0
0.1	1.6
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 225.6 nm.

REMARKS:


COMPOUND: 4-Chlorophenyl phenyl ether

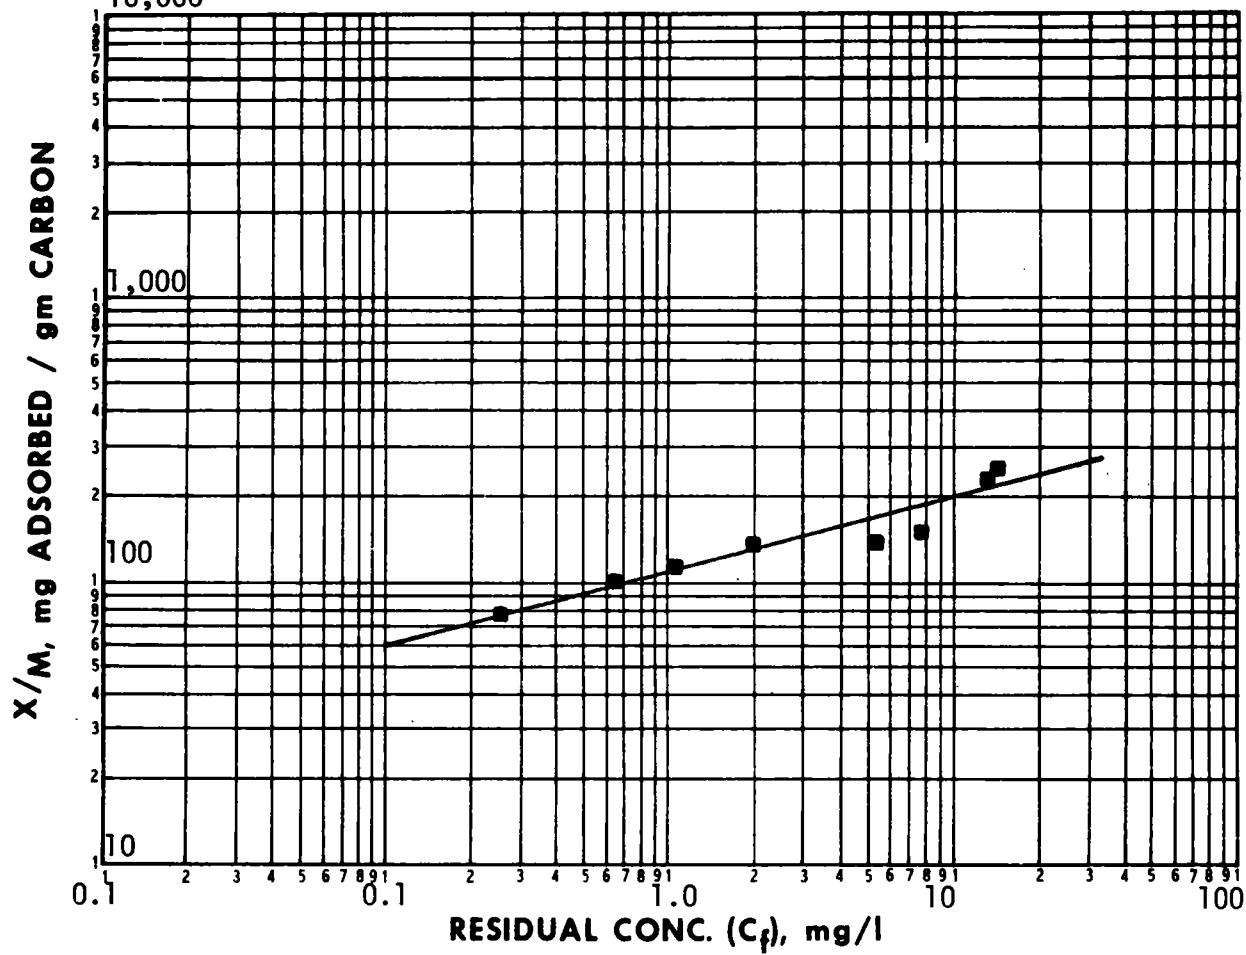

CARBON DOSE mg/l	■ pH= 5.3			pH=			pH=		
	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0	15.94								
5	14.63	1.31	262						
10	13.60	2.34	234						
50	7.75	8.19	163.8						
75	5.36	10.58	141.1						
100	2.01	13.93	139.3						
125	1.09	14.85	118.8						
150	0.67	15.27	101.8						
200	0.26	15.68	78.4						

COMPOUND: 5-Chlorouracil

STRUCTURE:



FORMULA: C₄H₃N₂O₂Cl

MOL. WT. 146.54

FREUNDLICH PARAMETERS	pH		
	pH 3 and 7 pooled	pH 9	
K	25	7.3	
1/n	0.58	0.90	
Corr. Coef. r	0.98	0.76	
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	96	58	
1.0	25	7.3	
0.1	6.6	0.91	
0.01	1.7	0.11	

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

C _o , mg/l	0.1	0.01	0.001
1.0	140	570	2,200
0.1		52	220
0.01			20


GRANULAR CARBON COLUMN

C _o , mg/l
1.0
0.1
0.01

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 273 nm

REMARKS:

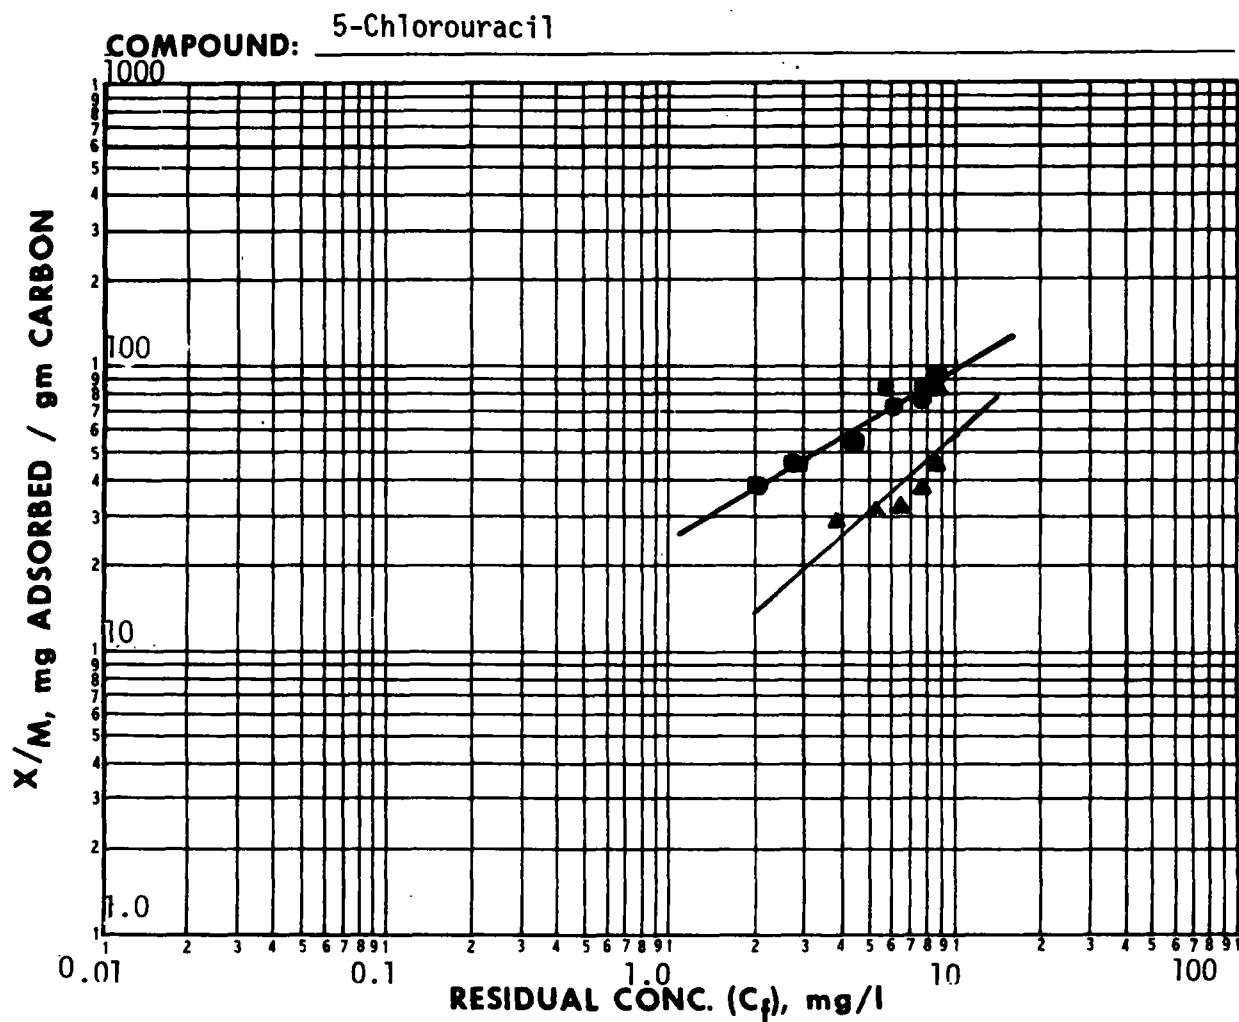

CARBON DOSE mg/l	\bullet pH = 3.0			\blacksquare pH = 7.0			\blacktriangle pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.84			9.89			9.80		
10	8.92	0.92	92	8.96	0.93	93	8.99	0.81	81
25	7.89	1.95	78	7.83	2.06	82	8.65	1.15	46
50	6.24	3.60	72	5.81	4.08	82	7.89	1.91	38
100	4.38	5.46	55	4.45	5.44	54	6.58	3.22	32
150	2.82	7.02	47	2.98	6.91	46	5.22	4.58	31
200	2.07	7.77	39	2.01	7.88	39	3.93	5.87	29

COMPOUND: Choline chloride

STRUCTURE:



FORMULA: C₅H₁₄ClNO MOL. WT. 139.63

FREUNDLICH PARAMETERS	pH		
K			
1/n			
Corr. Coef. r			
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

C_f, mg/l

C ₀ , mg/l			

GRANULAR CARBON COLUMN


C ₀ , mg/l	

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS: Not adsorbed


COMPOUND: Choline chloride

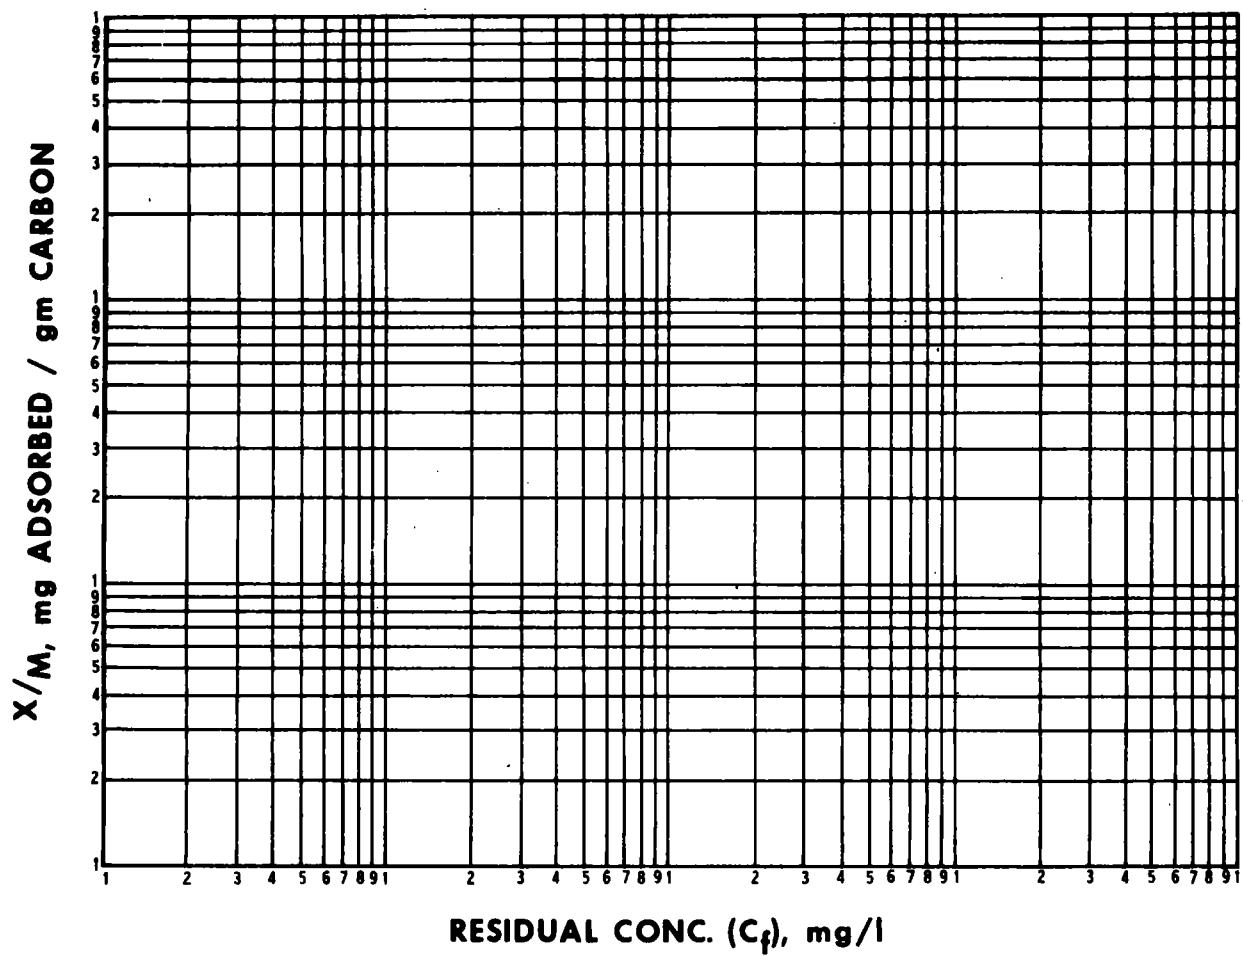

CARBON DOSE mg/l	pH= 3.0			pH= 7.0			pH= 9.0		
	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0	13.2			14.0			14.0		
5	13.6			13.6			14.6		
10	12.8			15.0			13.4		
25	13.8			13.2			13.6		
50	13.2			12.4			14.6		
100	13.6			13.2			14.0		
150	13.6			14.2			13.0		
200	12.6			12.6			13.2		

COMPOUND: Cyclohexanone

STRUCTURE:



FORMULA: C₆H₁₀O

MOL. WT. 98.14

FREUNDLICH PARAMETERS	pH		
	7.3		
K	6.2		
1/n	0.75		
Corr. Coef. r	0.84		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	36		
1.0	6.2		
0.1	1.1		
0.01	0.19		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

GRANULAR CARBON COLUMN

C _o , mg/l	0.1	0.01	0.001
1.0	820	5,100	29,000
0.1		470	2,900
0.01			260


C _o , mg/l	
1.0	160
0.1	91
0.01	52

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon


REMARKS:

COMPOUND: Cyclohexanone

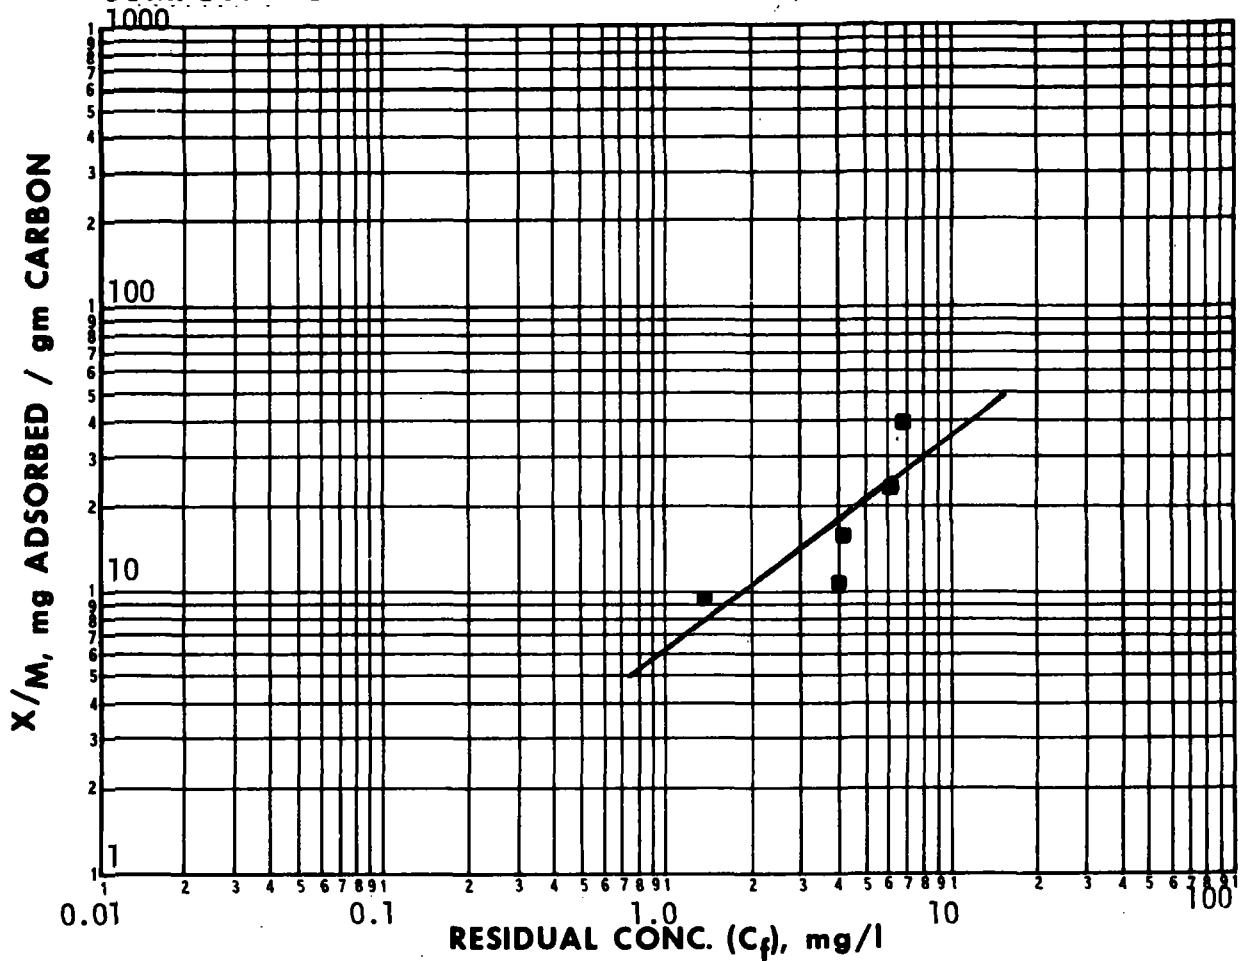

COMPOUND: Cyclohexylamine

STRUCTURE:



FORMULA: C₆H₁₃N

MOL. WT. 99.2

FREUNDLICH PARAMETERS	pH			
	6.0	7.0	8.0	9.0
K				
1/n				
Corr. Coef. r				
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm			

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

GRANULAR CARBON COLUMN

C _o , mg/l			


C _o , mg/l	

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS: Not adsorbed


Cyclohexylamine
COMPOUND: _____

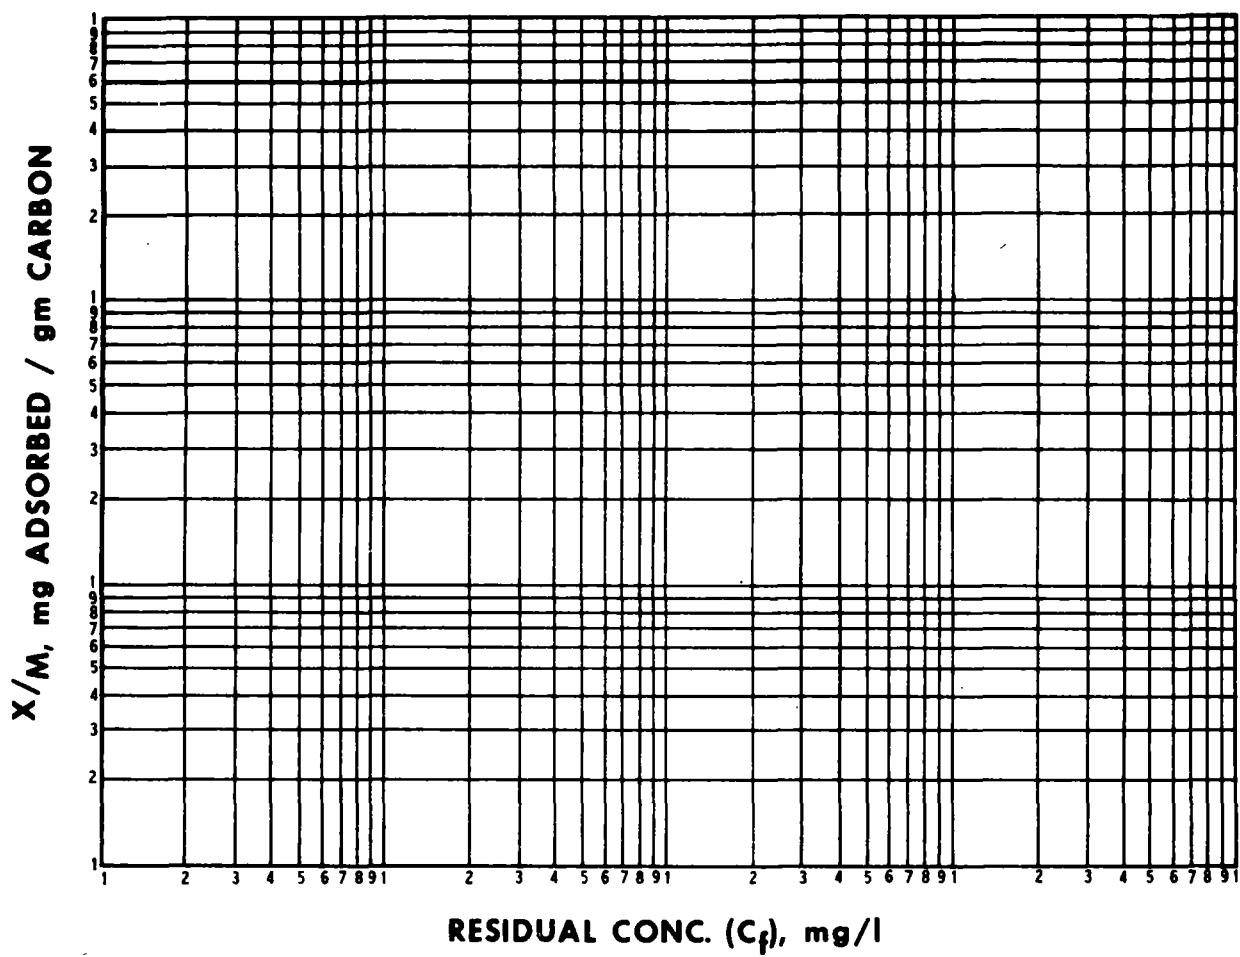

CARBON DOSE mg/l	pH = 3.0			pH = 7.0			pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	10.4			10.8			12.8		
5	10.4			10.2			11.6		
10	9.8			10.6			11.8		
25	9.4			10.4			10.6		
50	10.2			11.0			11.0		
100	9.8			10.4			10.4		
150	9.8			11.2			10.8		
200	10.6			10.0			10.0		

COMPOUND: Cytosine

STRUCTURE:



FORMULA: C₄H₅N₃ **MOL. WT.** 111.10

FREUNDLICH PARAMETERS	pH		
	3.0	pH 7 and 9 pooled	
K	6.3x10 ⁻¹³	1.1	
1/n	13.67	1.6	
Corr. Coef. r	0.90	0.98	
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	30	38	
1.0		1.1	
0.1		0.03	
0.01		0.0008	

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l


C ₀ , mg/l	0.1	0.01	0.001	C ₀ , mg/l	
1.0	> 30,000	> 100,000	> 100,000	1.0	935
0.1		> 100,000	> 100,000	0.1	3,330
0.01			> 100,000	0.01	12,500

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 275 nm

REMARKS:


COMPOUND: Cytosine

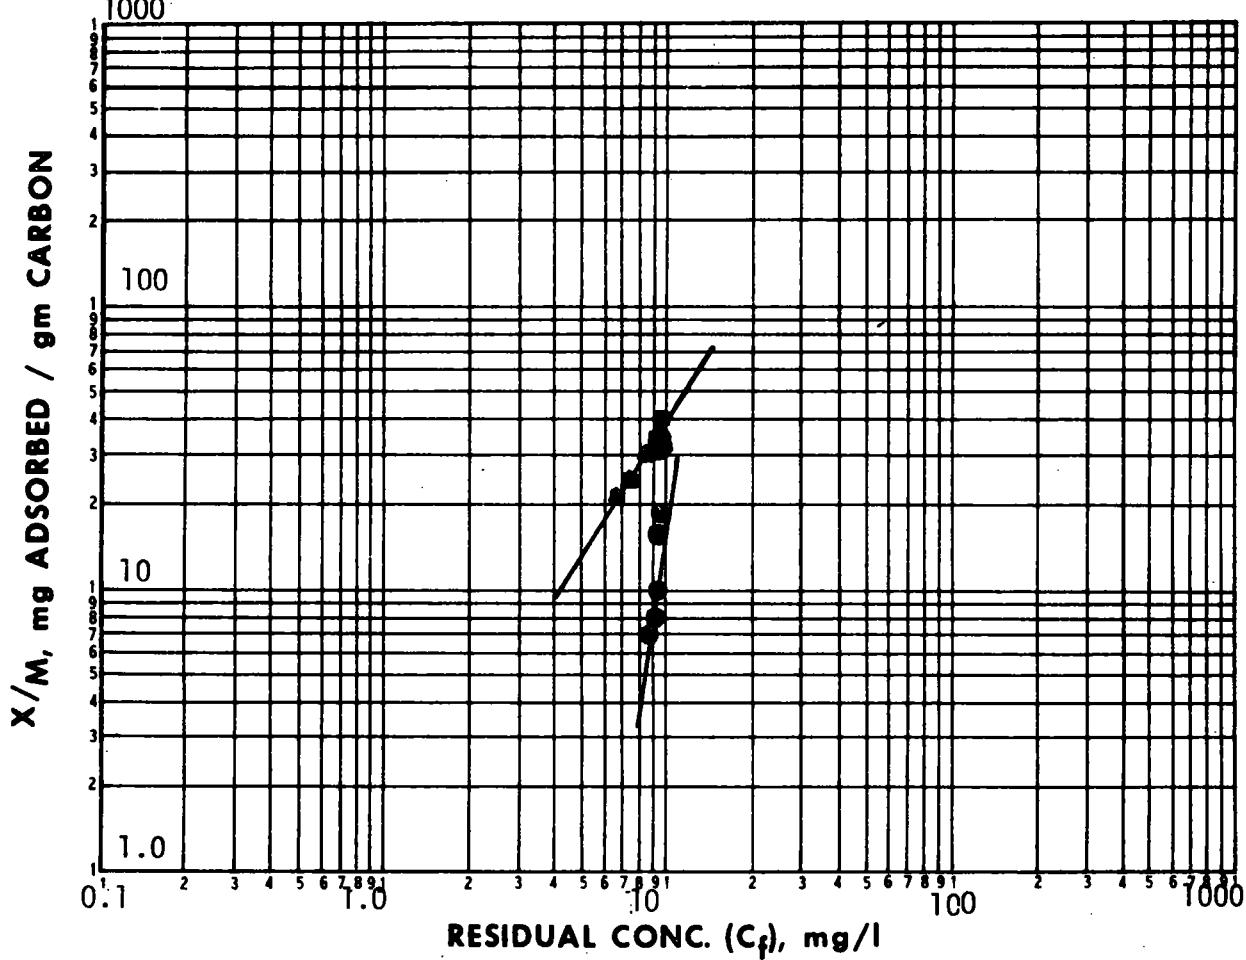

CARBON DOSE mg/l	● pH= 3.0			◻ pH= 7.0			◆ pH= 9.0		
	C _f	C ₀ -C _f =X	X/M	C _f	C ₀ -C _f =X	X/M	C _f	C ₀ -C _f =X	X/M
0	9.96			10.00			9.98		
5	9.80	0.16	32	9.80	0.20	40	9.80	0.18	36
10	9.77	0.19	19	9.64	0.36	36	9.63	0.35	35
25	9.53	0.43	17	9.15	0.85	34	9.20	0.78	31
50	9.48	0.48	10	8.48	1.52	30	8.49	1.49	30
100	9.18	0.78	8	7.53	2.47	25	7.54	2.44	24
150	8.87	1.09	7	6.80	3.20	21	6.81	3.17	21

COMPOUND: DDE

STRUCTURE:

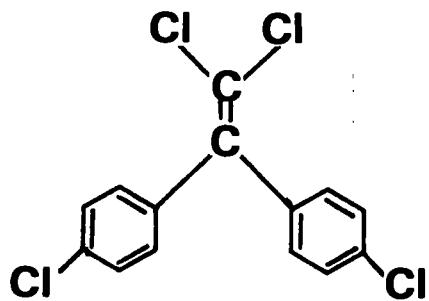

FORMULA: $C_{14}H_8Cl_4$ MOL. WT. 318.03

FREUNDLICH PARAMETERS	pH		
	5.3		
K	232		
1/n	0.37		
Corr. Coef. r	0.82		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	232		
0.1	98		
0.01	42		
0.001	18		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

C_f , mg/l

GRANULAR CARBON COLUMN

C_o , mg/l	0.1	0.01	0.001
1.0	9.0	23	55
0.1		2.1	5.5
0.01			0.5


C_o , mg/l	
1.0	4.3
0.1	1.0
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS:


COMPOUND: DDE

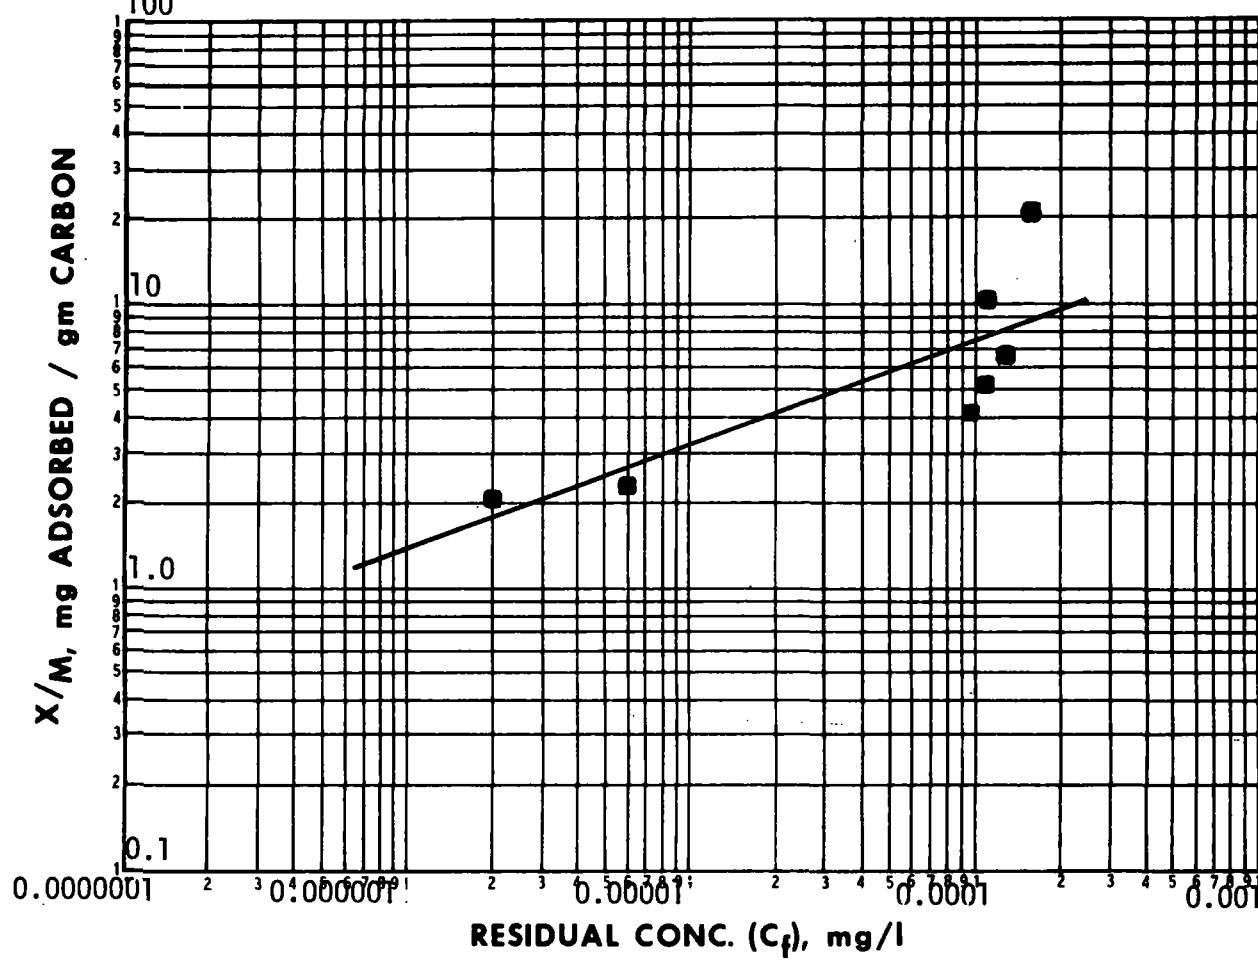

CARBON DOSE mg/l	$\bullet \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	$C_f \times C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	
0	20.7								
1.0	0.169	0.02053	20.5						
2.0	0.114	0.0206	10.3						
3.0	0.129	0.02057	6.86						
4.0	0.112	0.02059	5.15						
5.0	0.098	0.02060	4.12						
9.0	0.006	0.02069	2.30						
10.0	0.002	0.02070	2.07						
*	$\times 10^3$								

COMPOUND: DDT

STRUCTURE:

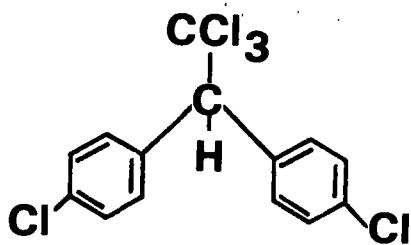

FORMULA: $C_{14}H_9Cl_5$ **MOL. WT.** 354.50

FREUNDLICH PARAMETERS	pH		
	5.3		
K	322		
1/n	0.50		
Corr. Coef. r	0.89		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	322		
0.1	103		
0.01	33		
0.001	10		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

GRANULAR CARBON COLUMN

C_o , mg/l	0.1	0.01	0.001
1.0	8.8	31	98
0.1		2.8	9.7
0.01			0.9


C_o , mg/l	
1.0	3.1
0.1	1.0
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS:


COMPOUND: DDT

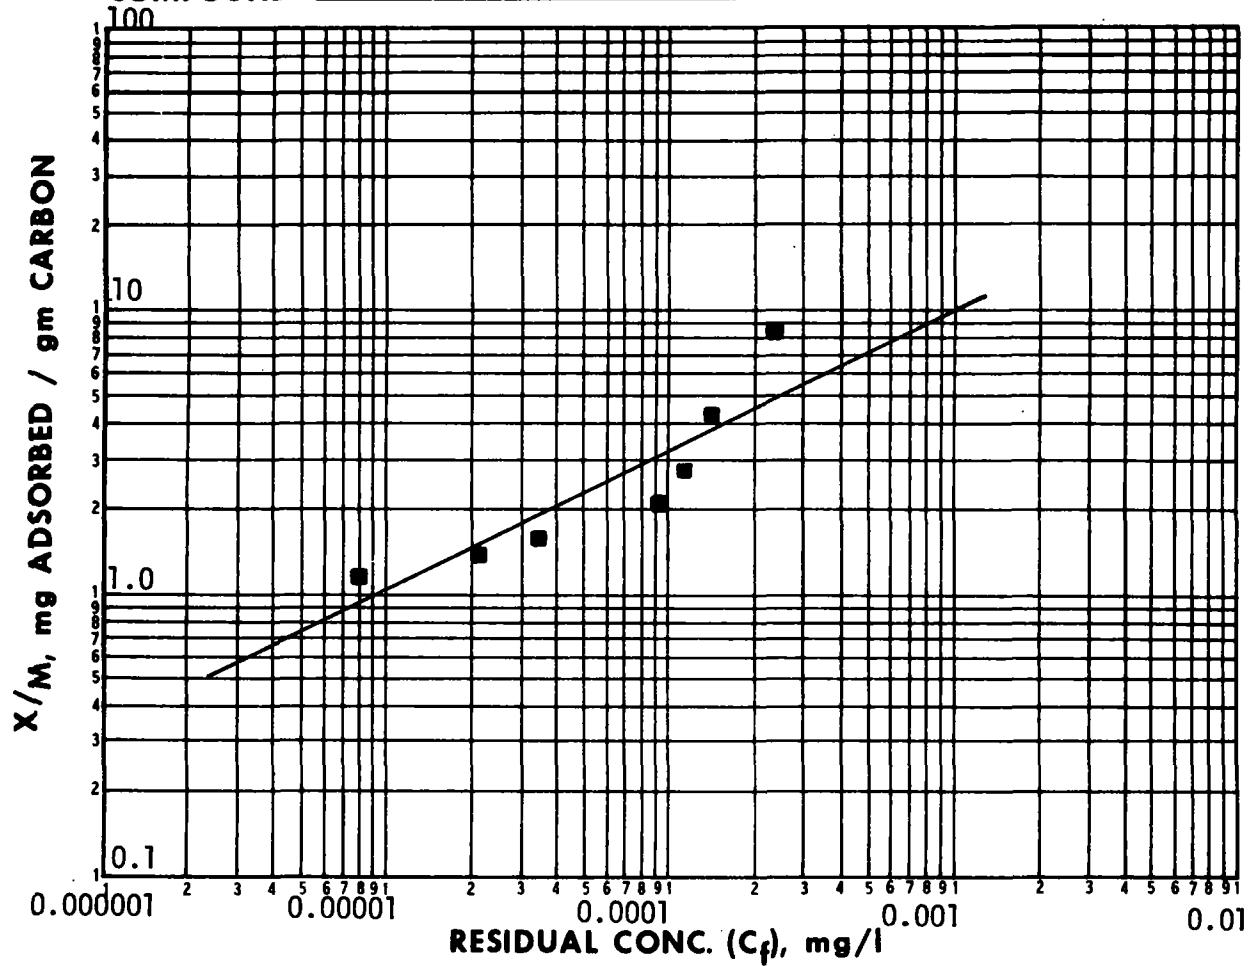

CARBON DOSE mg/l	$pH = 5.3$				$pH =$				$pH =$			
	C_f^*	$C_o - C_f = X^*$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	8.64											
1.0	0.234	8.41	8.41									
2.0	0.147	8.49	4.25									
3.0	0.121	8.52	2.84									
4.0	0.091	8.55	2.14									
5.0	0.034	8.61	1.72									
6.0	0.021	8.62	1.44									
7.0	0.008	8.63	1.23									
$* \times 10^3$												

COMPOUND: Dibenzo(a,h)anthracene

STRUCTURE:



FORMULA: C₂₂H₁₄ **MOL. WT.** 278.33

FREUNDLICH PARAMETERS	pH		
	7.1		
K	69.3		
1/n	0.75		
Corr. Coef. r	0.97		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	69		
0.1	12		
0.01	2.1		
0.001	0.39		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	73	450	2,600
0.1		41	250
0.01			23


C ₀ , mg/l	
1.0	14
0.1	8.3
0.01	4.8

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Fluorescence: excitation 298 nm; 395 nm.

REMARKS: Modified protocol used for isotherm due to limited solubility.


COMPOUND: Dibenzo(a,h)anthracene

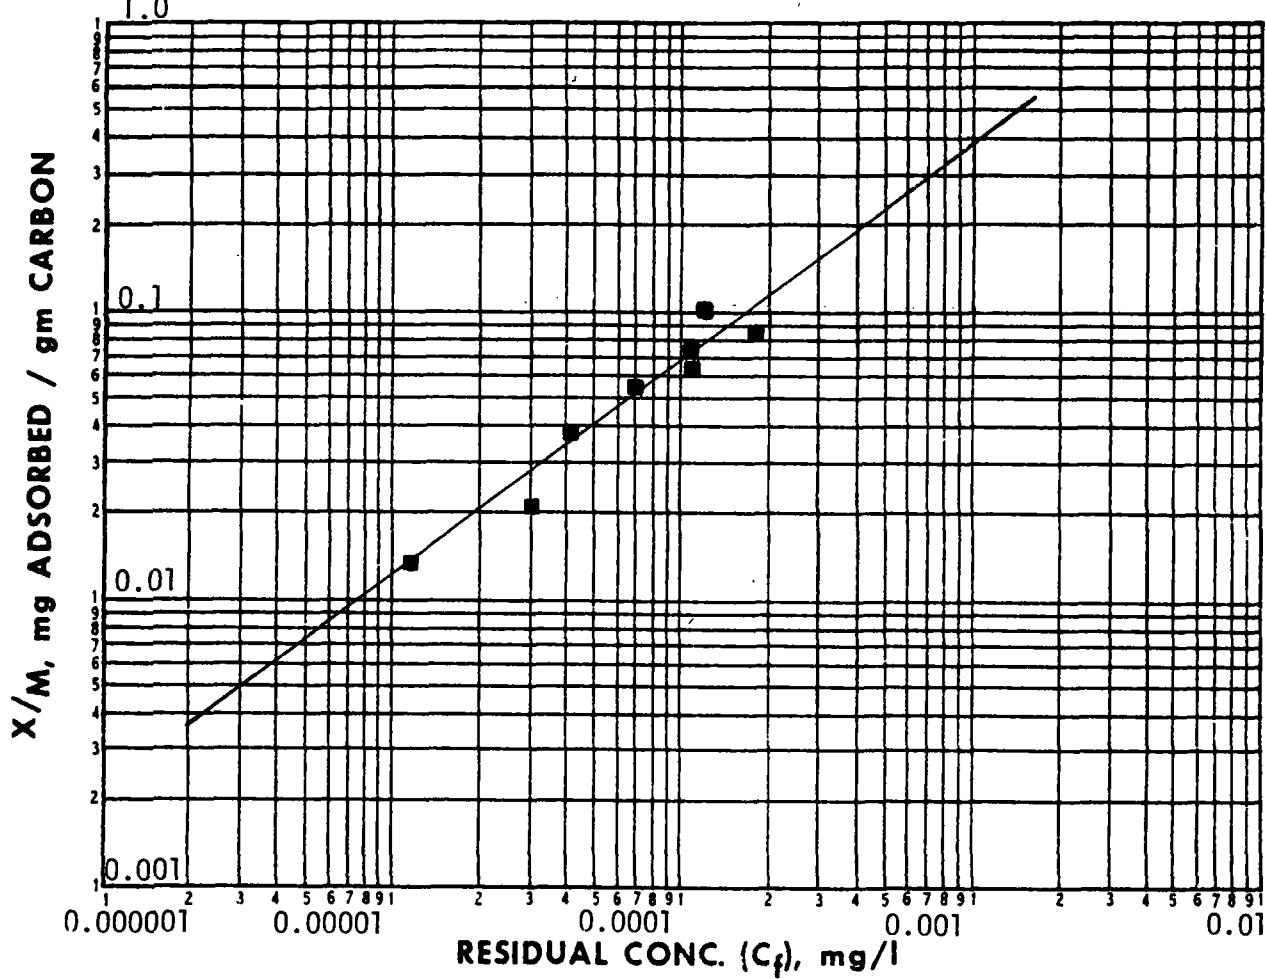

CARBON DOSE mg/l	$C_o \times 10^3$	$C_f \times 10^3$	$C_o - C_f = X$	X/M
0.72	0.199	0.126	0.000073	0.101
0.74	0.166	0.109	0.000057	0.077
2.34	0.133	0.041	0.000092	0.039
2.82	0.428	0.182	0.000246	0.087
2.86	0.298	0.114	0.000184	0.064
3.18	0.246	0.070	0.000176	0.055
6.94	0.112	0.012	0.000100	0.014
7.46	0.185	0.030	0.000155	0.021

COMPOUND: Dibromochloromethane

STRUCTURE:



FORMULA: CHBrCl **MOL. WT.** 208.29

FREUNDLICH PARAMETERS	pH		
	5.3		
K	4.8		
1/n	0.34		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	4.8		
0.1	2.2		
0.01	1.0		
0.001	0.46		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C _o , mg/l	0.1	0.01	0.001
1.0	410	980	2,200
0.1		89	210
0.01			19


C _o , mg/l	
1.0	210
0.1	45
0.01	9.9

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:


COMPOUND: Dibromochloromethane

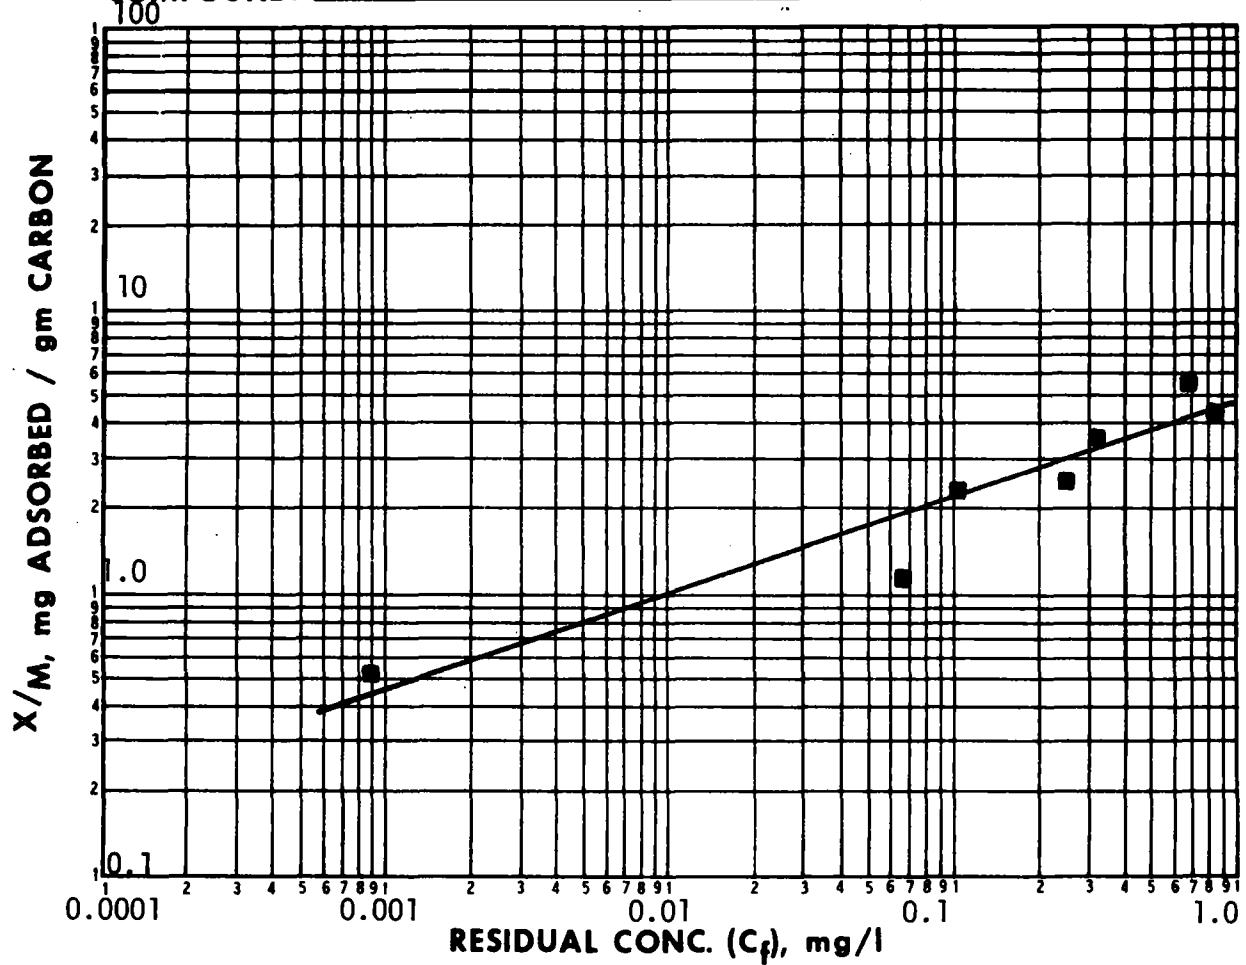

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\blacksquare \text{ pH} =$			$\blacksquare \text{ pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.000								
38	0.829	0.171	4.45						
58	0.677	0.323	5.59						
192	0.308	0.692	3.60						
289	0.254	0.746	2.59						
385	0.101	0.899	2.34						
769	0.066	0.934	1.21						
1923	0.0009	0.9991	0.520						

COMPOUND: 1,2-Dibromo-3-chloropropane

STRUCTURE:

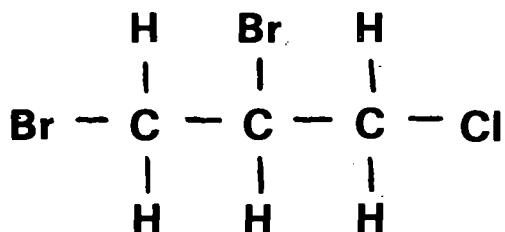

FORMULA: C₃H₄Br₂Cl

MOL. WT. 235.34

FREUNDLICH PARAMETERS	pH		
	5.3		
K	53		
1/n	0.47		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	53		
0.1	18		
0.01	6.0		
0.001	2.0		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

GRANULAR CARBON COLUMN

C ₀ , mg/l	0.1	0.01	0.001
1.0	50	160	490
0.1		15	48
0.01			4.4


C ₀ , mg/l	
1.0	19
0.1	5.6
0.01	1.7

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. - Purge and Trap

REMARKS:


COMPOUND: 1,2-Dibromo-3-chloropropane

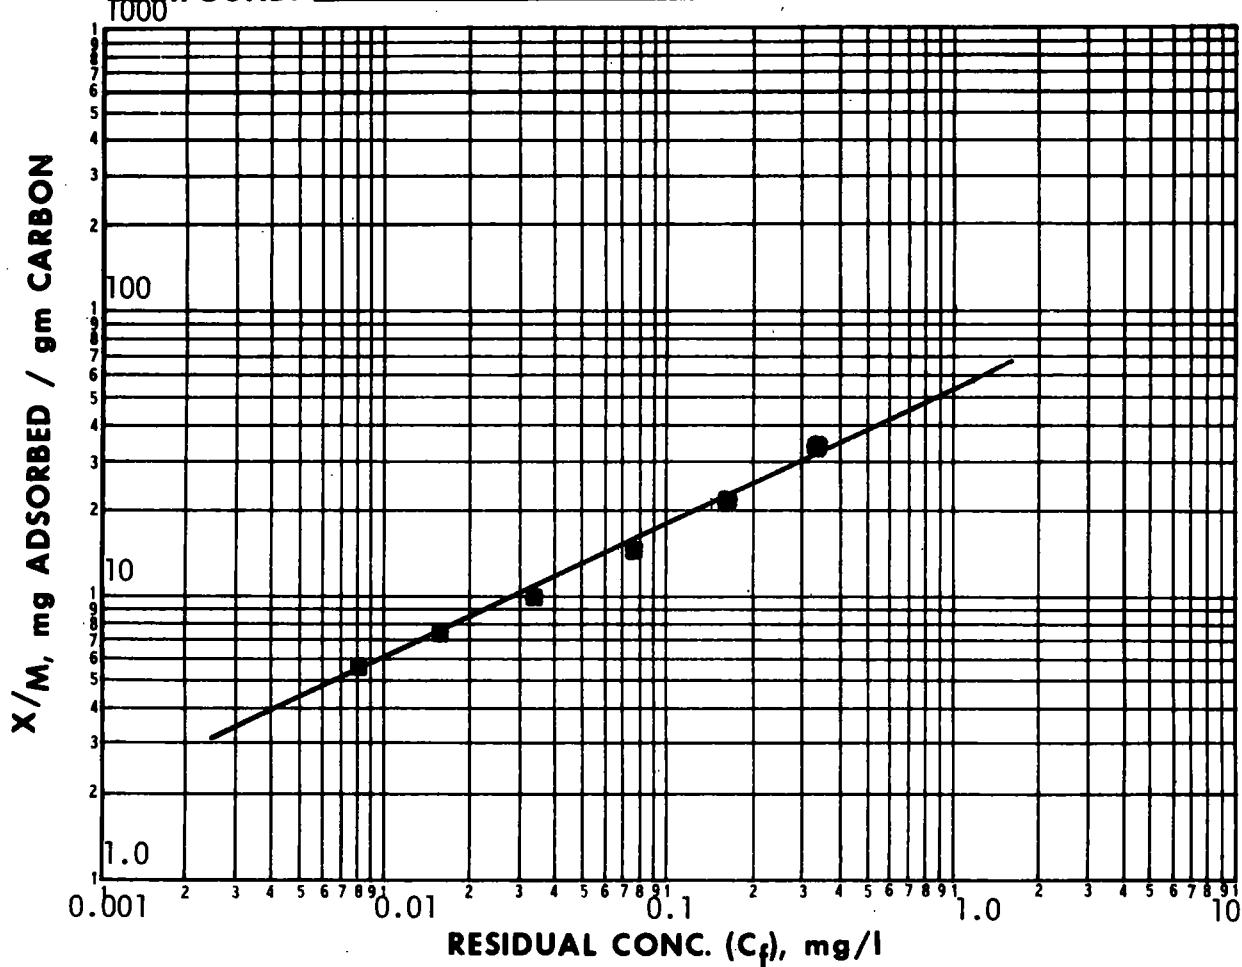

CARBON DOSE mg/l	$\text{pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.996								
19	0.329	0.667	34.7						
39	0.179	0.817	21.2						
58	0.077	0.918	15.9						
96	0.032	0.964	10.0						
135	0.016	0.980	7.28						
173	0.008	0.988	5.71						

COMPOUND: 1,2-Dichlorobenzene

STRUCTURE:



FORMULA: C₆H₄Cl₂ MOL. WT. 147.00

FREUNDLICH PARAMETERS	pH		
	5.5		
K	129		
1/n	0.43		
Corr. Coef. r	0.92		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	129		
0.1	47		
0.01	17		
0.001	6.4		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	19	57	160
0.1		5.2	15
0.01			1.4


C ₀ , mg/l	
1.0	7.7
0.1	2.1
0.01	0.6

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 214 nm.


REMARKS:

COMPOUND: 1,2-Dichlorobenzene

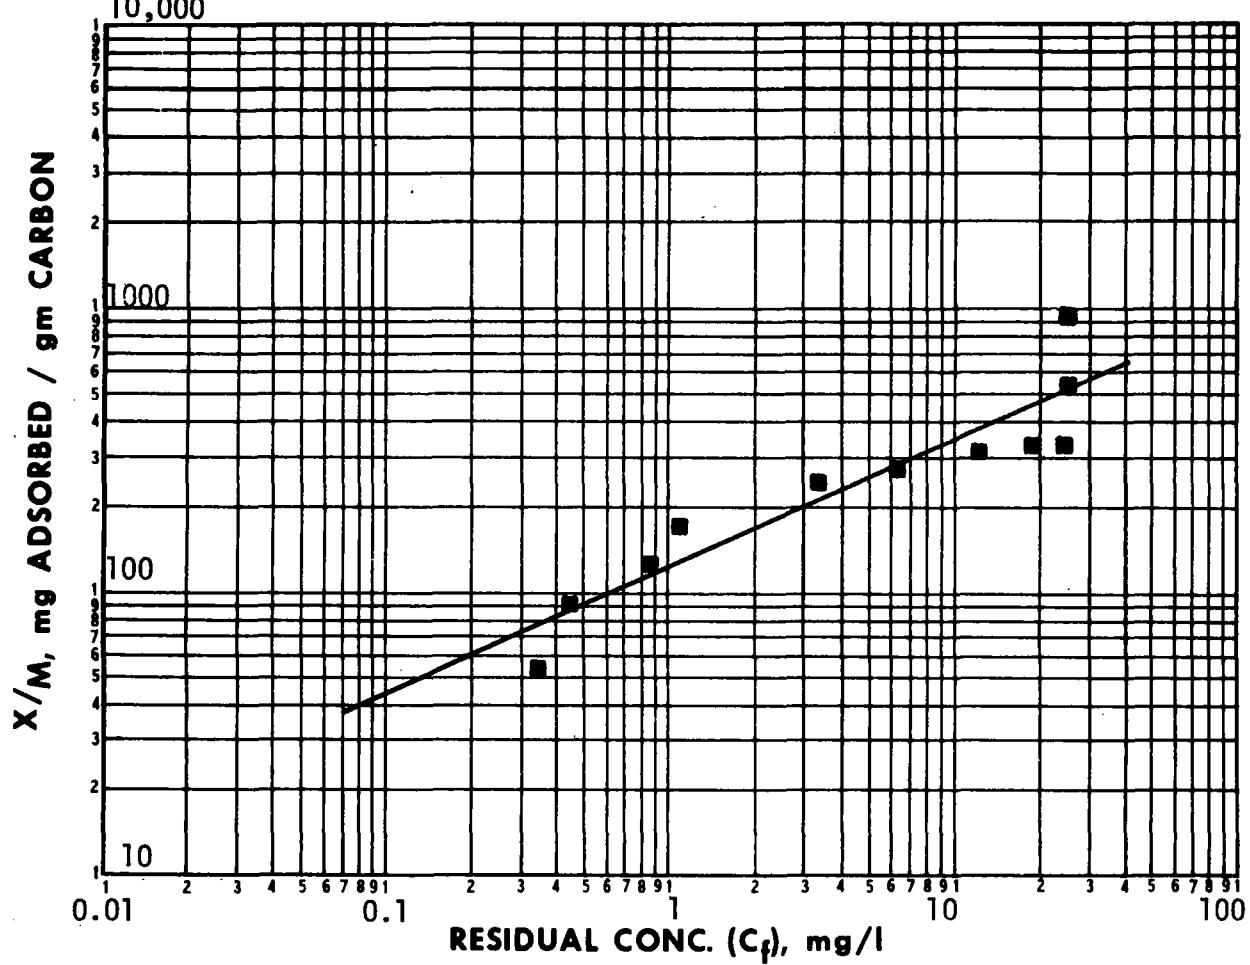

COMPOUND: 1,3-Dichlorobenzene

STRUCTURE:



FORMULA: $C_6H_4Cl_2$

MOL. WT. 147.00

FREUNDLICH PARAMETERS	pH		
	5.1		
K	118.		
1/n	0.45		
Corr. Coef. r	0.86		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	118		
0.1	42		
0.01	15		
0.001	5.1		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	22	68	200
0.1		6.2	19
0.01			1.8


C_o , mg/l	
1.0	8.5
0.1	2.4
0.01	0.7

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 214 nm

REMARKS:

COMPOUND: 1,3-Dichlorobenzene
10,000

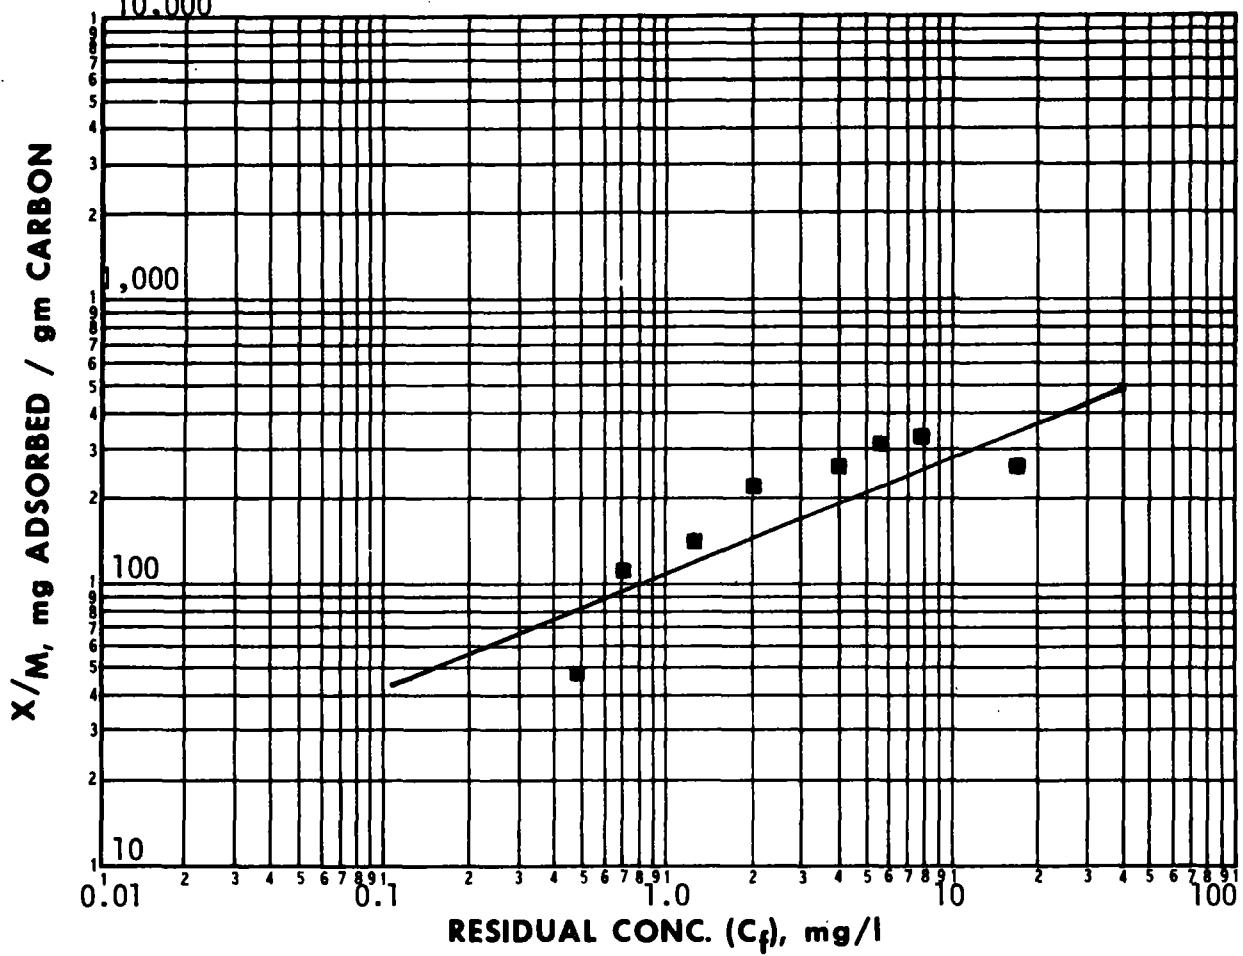

	pH = 5.1			pH =			pH =		
CARBON DOSE mg/l	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0	24.25								
25	17.51	6.74	269.6						
50	7.85	16.4	328						
60	5.73	18.52	308.7						
75	3.96	20.29	270.5						
100	2.04	22.21	222.1						
150	1.31	22.94	152.9						
200	0.70	23.55	117.7						
500	0.48	23.77	47.5						

COMPOUND: 1,4-Dichlorobenzene

STRUCTURE:



FORMULA: C₆H₄Cl₂

MOL. WT. 147.00

FREUNDLICH PARAMETERS	pH		
	5.1		
K	121		
1/n	0.47		
Corr. Coef. r	0.94		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	121		
0.1	41		
0.01	14		
0.001	4.6		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	22	73	220
0.1		6.6	22
0.01			2.0


C ₀ , mg/l	
1.0	8.3
0.1	2.5
0.01	0.7

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 223 nm

REMARKS:


COMPOUND: 1,4-Dichlorobenzene
 10,000

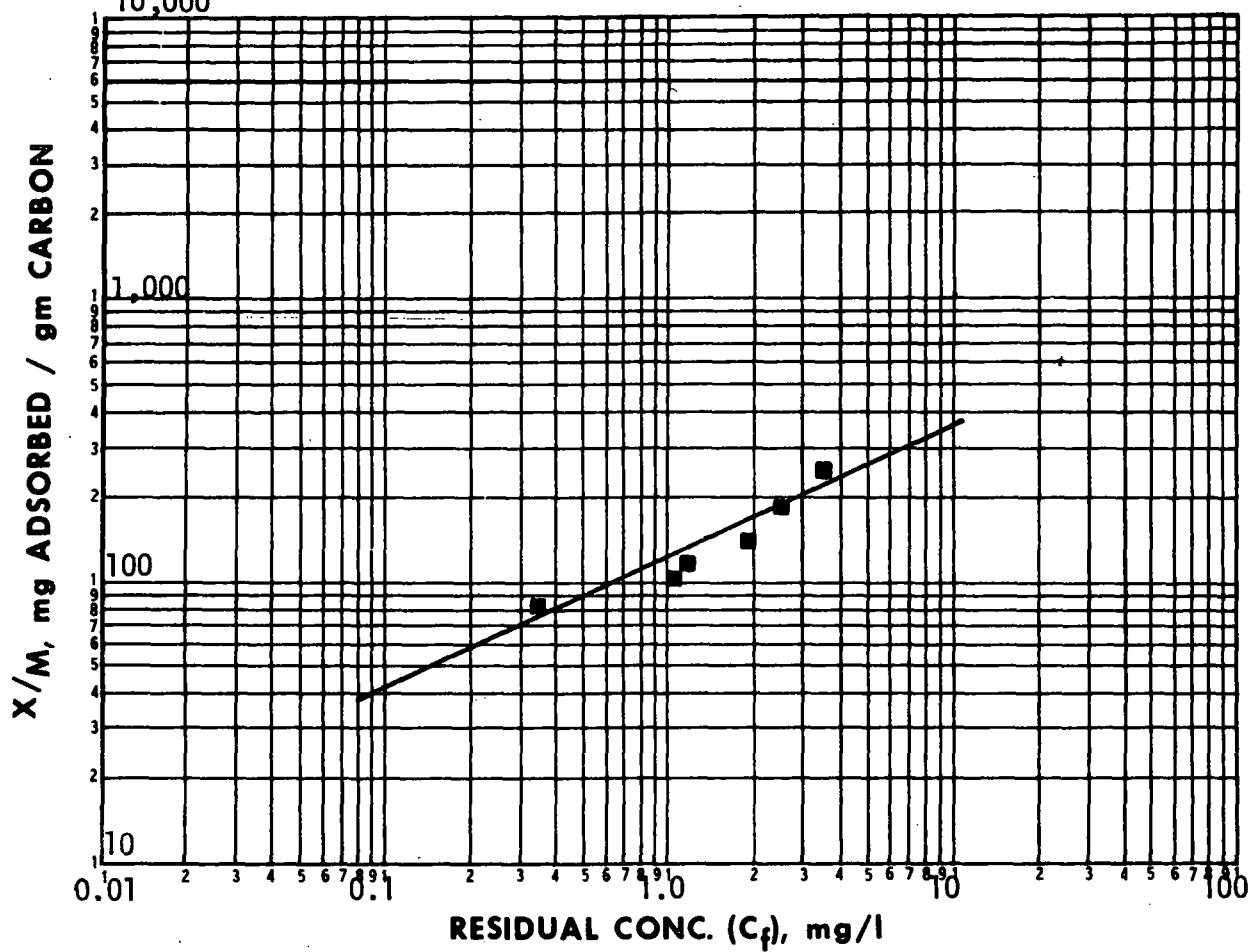

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.1$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	16.71								
50	3.48	13.23	264.6						
75	2.55	14.16	188.8						
100	1.94	14.77	147.7						
125	1.19	15.52	124.16						
150	1.03	15.68	104.5						
200	0.33	16.38	81.9						

COMPOUND: 3,3-Dichlorobenzidine

STRUCTURE:

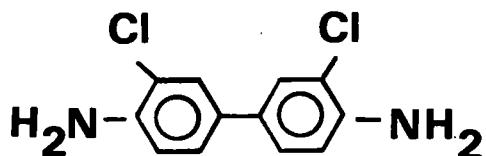

FORMULA: C₁₂H₁₀Cl₂N₂ **MOL. WT.** 253.13

FREUNDLICH PARAMETERS	pH		
	All Data Pooled		
K	300		
1/n	0.20		
Corr. Coef. r	0.92		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	300		
0.1	190		
0.01	120		
0.001	73		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	4.8	8.3	13
0.1		0.8	1.3
0.01			0.1


C ₀ , mg/l	
1.0	3.3
0.1	0.5
0.01	0.1

(a) Carbon doses in mg/l for pooled data

ANALYTICAL METHOD: Ultraviolet Spectroscopy 282 nm

REMARKS: OSHA regulated carcinogen


COMPOUND: 3,3-Dichlorobenzidine

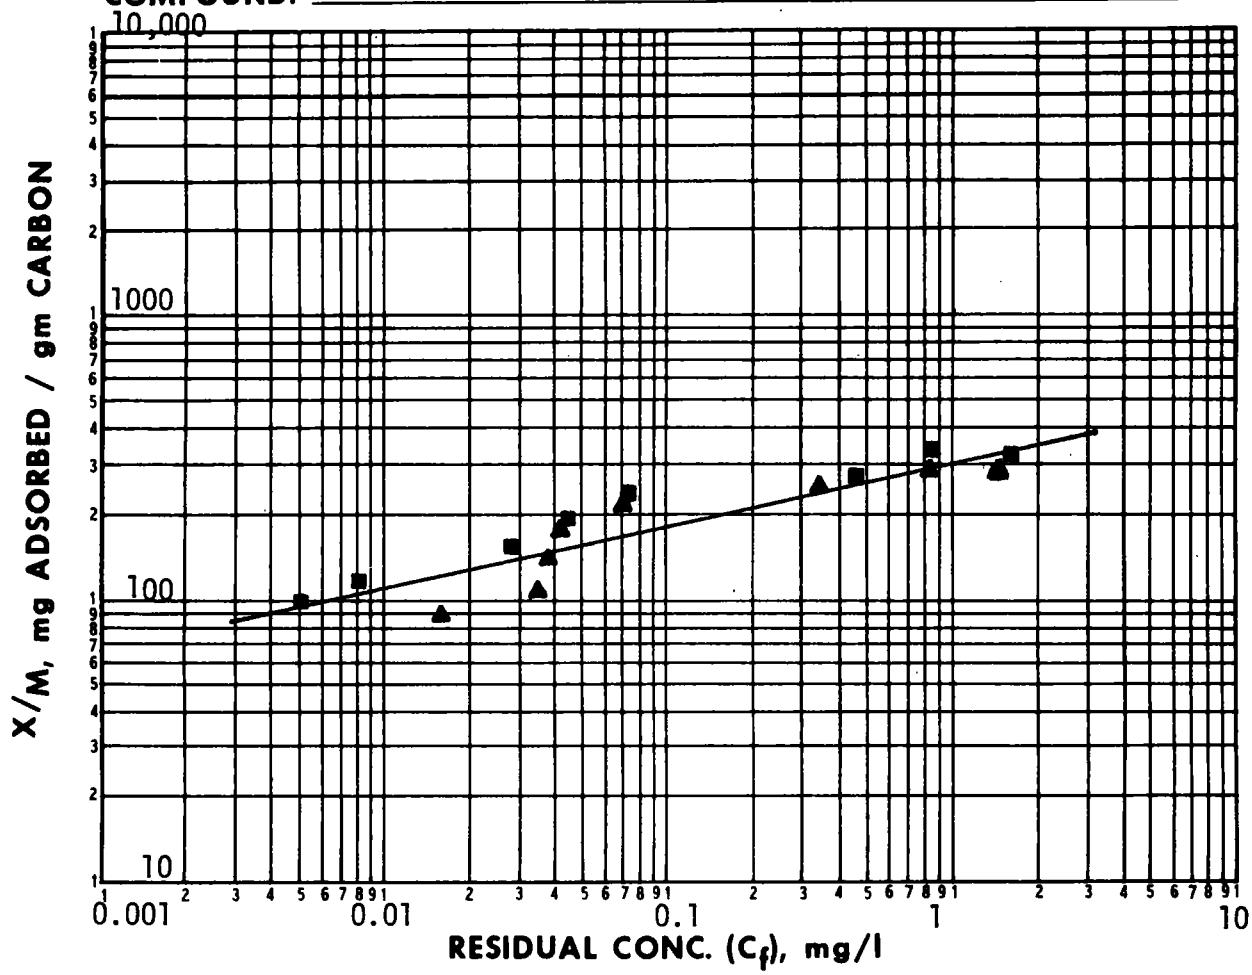

CARBON DOSE mg/l	pH = 7.2			pH = 9.1			pH =		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	2.51				2.28				
2.5	1.70	0.81	324	1.55	0.73	292			
5	0.83	1.68	336	0.81	1.47	294			
7.5	0.46	2.05	273	0.33	1.95	260			
10	0.072	2.44	244	0.070	2.210	221			
12.5	0.044	2.466	197	0.042	2.238	179			
15	0.028	2.482	165	0.038	2.242	149			
20	0.008	2.502	125	0.034	2.246	112			
25	0.005	2.505	100	0.017	2.263	90			

COMPOUND: Dichlorobromomethane

STRUCTURE:



FORMULA: CHCl_2Br **MOL. WT.** 163.83

FREUNDLICH PARAMETERS	pH		
	5.3		
K	7.9		
1/n	0.61		
Corr. Coef. r	1.00		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	7.9		
0.1	1.9		
0.01	0.47		
0.001	0.12		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	500	2,100	8,700
0.1		190	860
0.01			78


C_o , mg/l	
1.0	130
0.1	52
0.01	21

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:


COMPOUND: Dichlorobromomethane

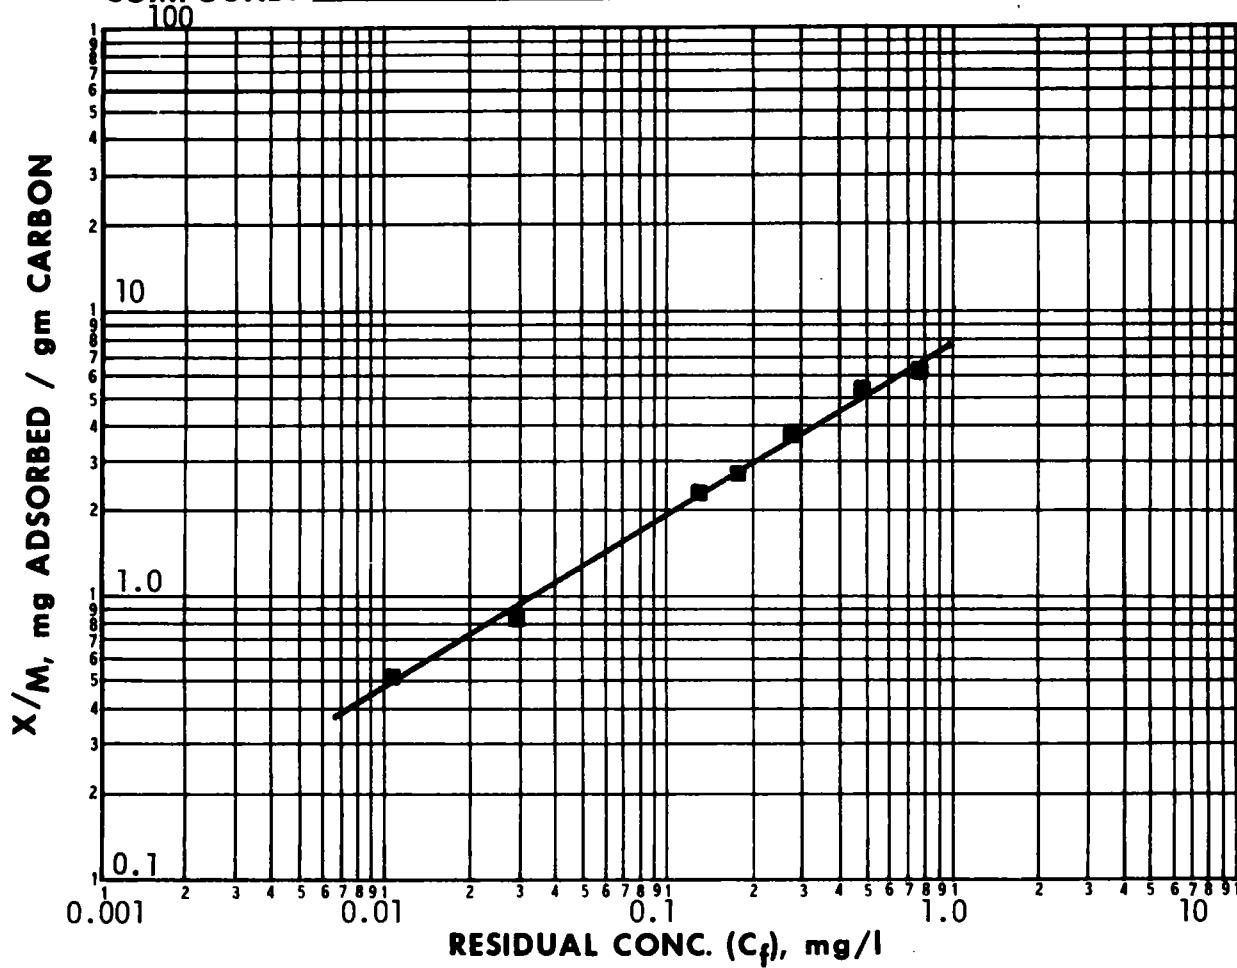

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.000								
38	0.762	0.238	6.20						
96	0.479	0.521	5.42						
192	0.277	0.723	3.76						
289	0.183	0.817	2.83						
385	0.134	0.866	2.25						
1154	0.029	0.971	0.841						
1923	0.011	0.990	0.514						

COMPOUND: 1,1-Dichloroethane

STRUCTURE:



FORMULA: C₂H₄Cl₂

MOL. WT. 98.96

FREUNDLICH PARAMETERS	pH		
	5.3		
K	1.79		
1/n	0.53		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	1.8		
0.1	0.52		
0.01	0.15		
0.001	0.04		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	1,700	6,500	22,000
0.1		600	2,200
0.01			200

GRANULAR CARBON COLUMN


C ₀ , mg/l	
1.0	560
0.1	190
0.01	70

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G.C - Purge and Trap

REMARKS:


COMPOUND: 1,1-Dichloroethane

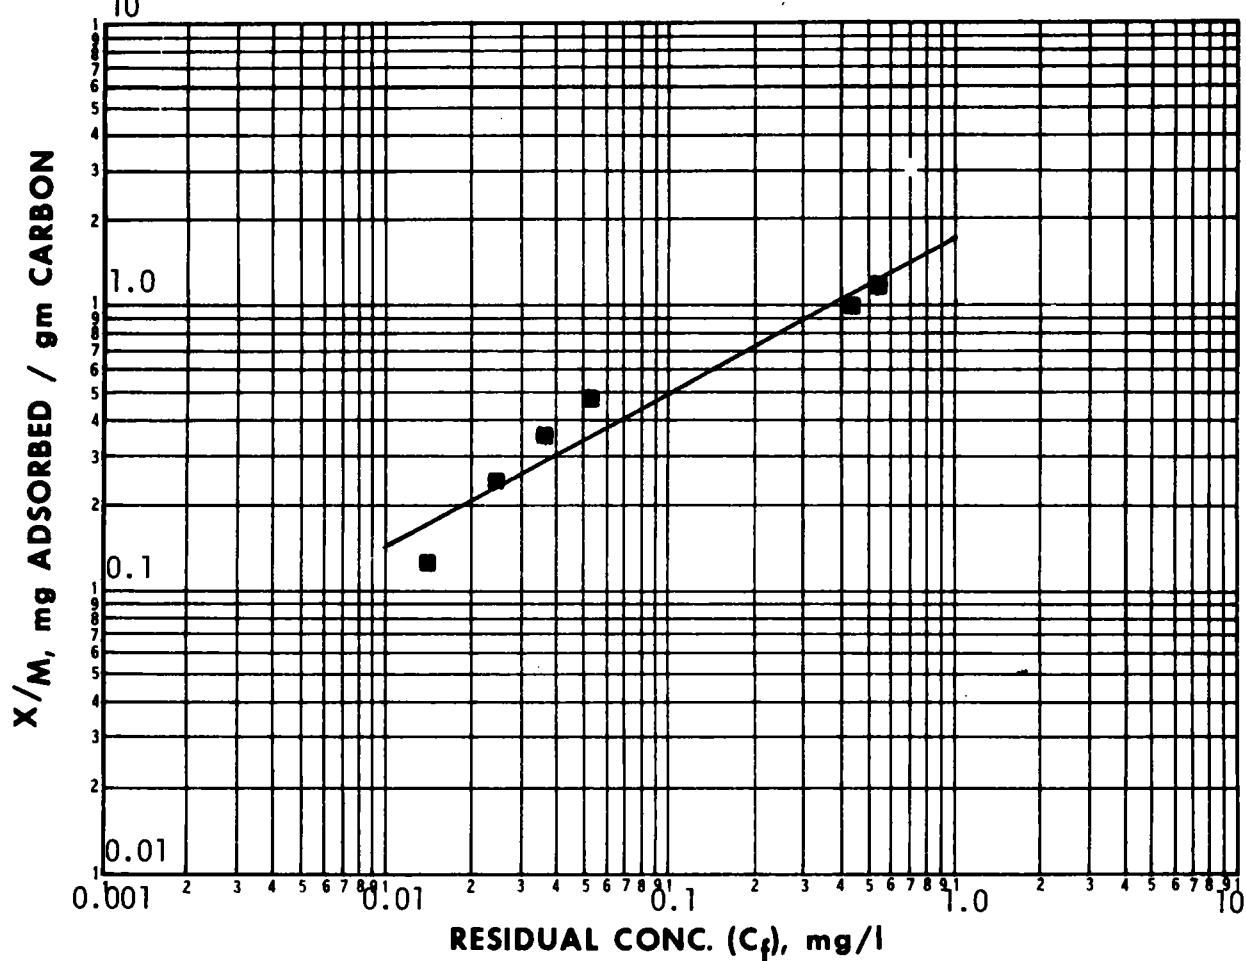

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.000								
385	0.532	0.468	1.22						
577	0.422	0.578	1.00						
1923	0.052	0.948	0.493						
2692	0.036	0.964	0.358						
3846	0.023	0.977	0.254						
7692	0.014	0.986	0.128						

COMPOUND: 1,2-Dichloroethane

STRUCTURE:



FORMULA: C₂H₄Cl₂

MOL. WT. 98.96

FREUNDLICH PARAMETERS	pH		
	5.3		
K	3.57		
1/n	0.83		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	3.6		
0.1	0.52		
0.01	0.08		
0.001	0.01		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	1700	13,000	86,000
0.1		1,200	8,600
0.01			780


C ₀ , mg/l
1.0
0.1
0.01

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G.C. - Purge and Trap

REMARKS:


COMPOUND: 1,2-Dichloroethane

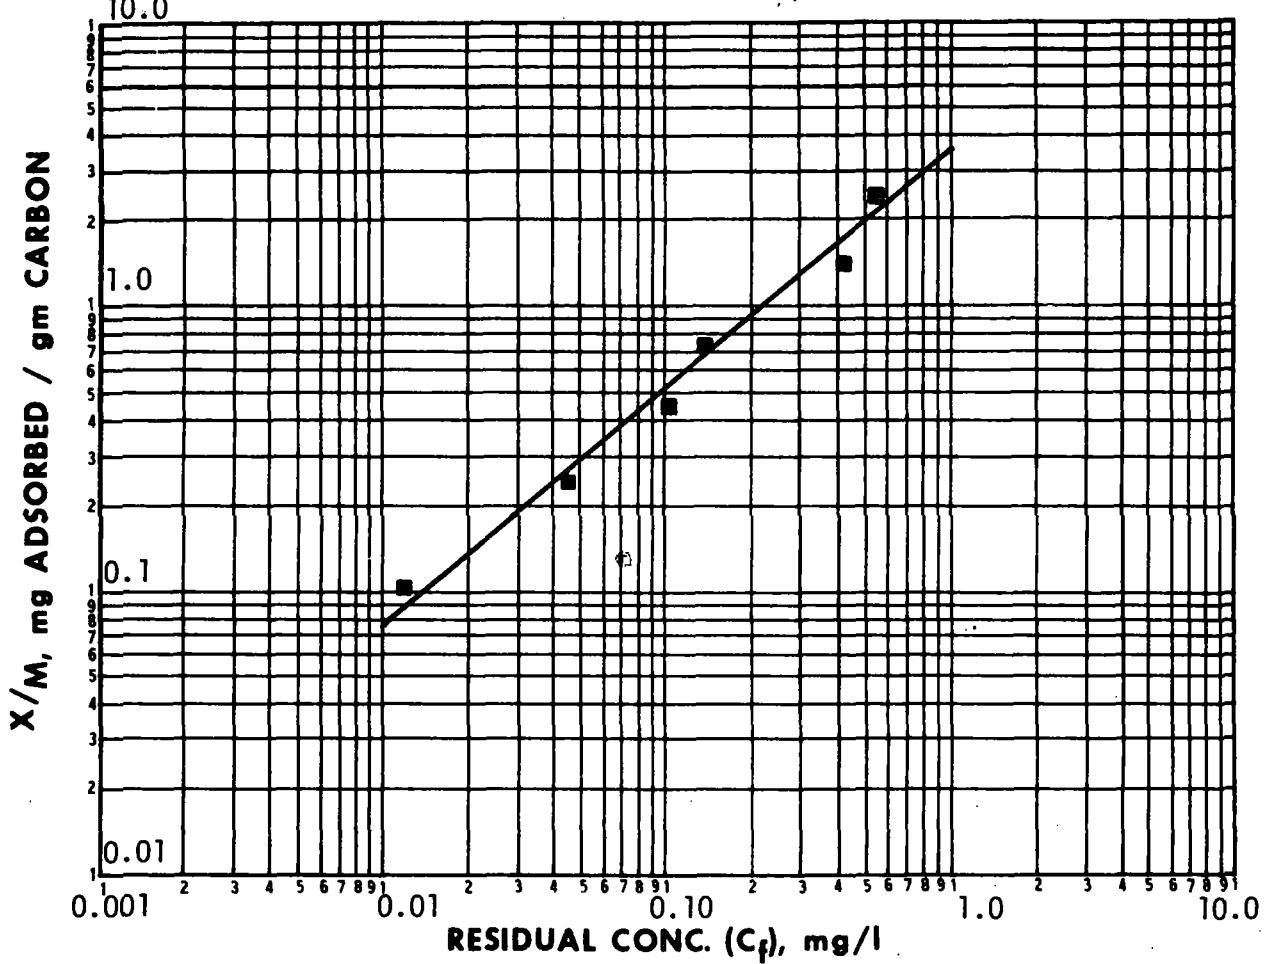

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.000								
192	0.527	0.473	2.46						
385	0.406	0.594	1.55						
1154	0.144	0.856	0.742						
1923	0.103	0.897	0.466						
3846	0.046	0.954	0.248						
9615	0.012	0.988	0.103						

COMPOUND: 1,2-trans-Dichloroethene

STRUCTURE:



FORMULA: $\text{C}_2\text{H}_2\text{Cl}_2$ **MOL. WT.** 96.94

FREUNDLICH PARAMETERS	pH		
	6.7		
K	3.05		
1/n	0.51		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	3.0		
0.1	0.94		
0.01	0.29		
0.001	0.09		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	950	3,400	11,000
0.1		310	1,100
0.01			100


C_o , mg/l	
1.0	330
0.1	110
0.01	34

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G.C. Purge and Trap

REMARKS:


COMPOUND: 1,2-trans-Dichloroethene

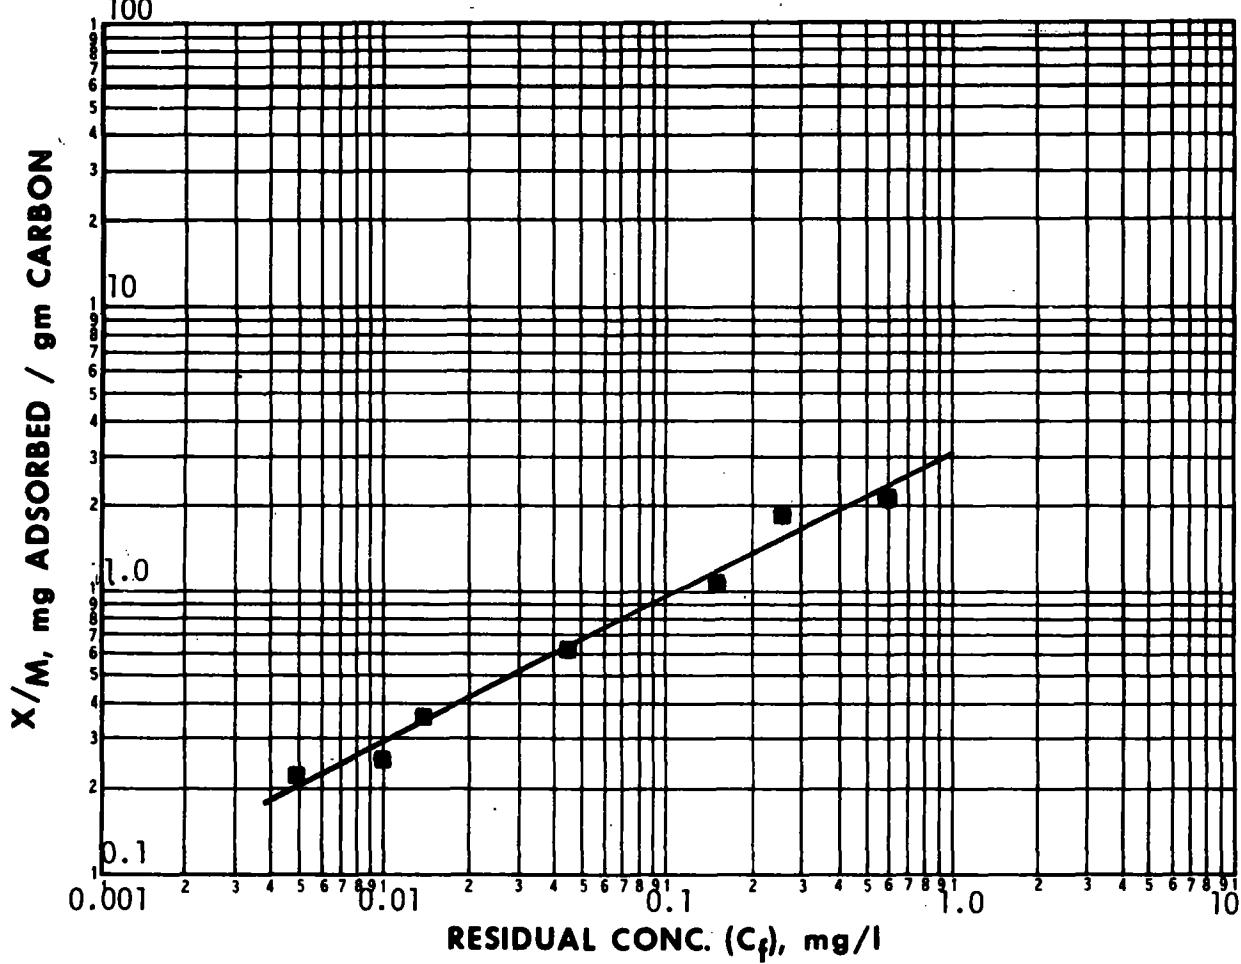

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 6.7$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1000								
192	0.597	0.403	2.10						
385	0.258	0.742	1.93						
769	0.160	0.840	1.09						
1538	0.044	0.956	0.621						
2692	0.014	0.986	0.366						
3846	0.0099	0.990	0.257						
4615	0.0049	0.995	0.216						

COMPOUND: 1,1-Dichloroethene (1,1-Dichloroethylene)

STRUCTURE:



FORMULA: C₂H₂Cl₂ MOL. WT. 96.94

FREUNDLICH PARAMETERS	pH		
	5.3		
K	4.91		
1/n	0.54		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	4.9		
0.1	1.4		
0.01	0.41		
0.001	0.12		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	640	2,400	8,600
0.1		220	850
0.01			77


C ₀ , mg/l	
1.0	200
0.1	70
0.01	24

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:

COMPOUND: 1,1-Dichloroethene (1,1-Dichloroethylene)

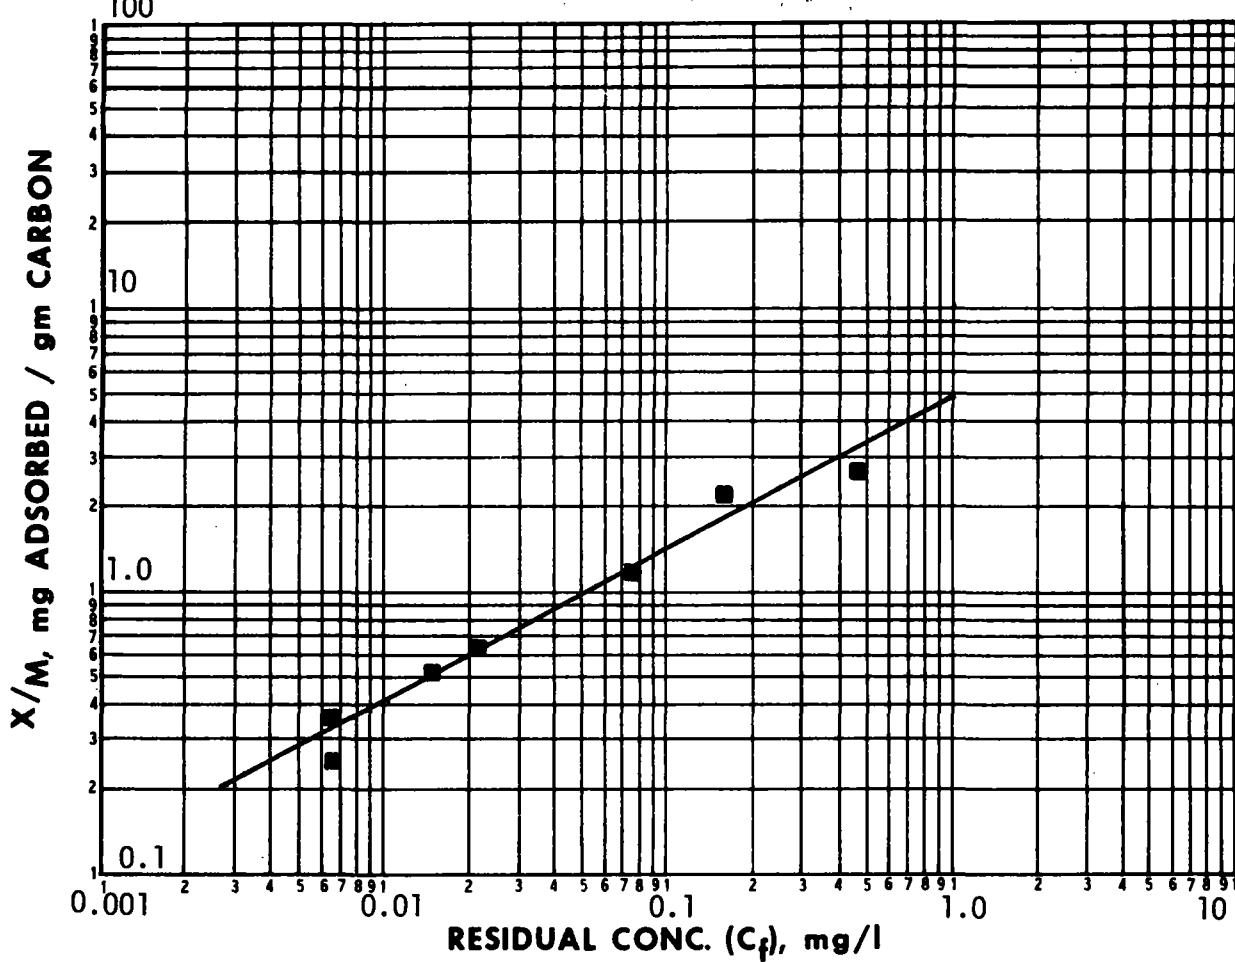

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.000								
192	0.455	0.545	2.83						
385	0.166	0.834	2.17						
769	0.075	0.925	1.20						
1538	0.021	0.979	0.637						
1923	0.016	0.984	0.512						
2692	0.0063	0.994	0.369						
3846	0.0065	0.994	0.258						

COMPOUND: 2,4-Dichlorophenol

STRUCTURE:



FORMULA: C₆H₄OCl₂

MOL. WT. 163.00

FREUNDLICH PARAMETERS	pH		
	3.0	5.3	9.0
K	147	157	141
1/n	0.35	0.15	0.29
Corr. Coef. r	0.96	0.96	0.96
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	147	157	141
0.1	65	112	72
0.01	29	80	37
0.001	13	57	19

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	8.0	12	17
0.1		1.1	1.7
0.01			0.2


C ₀ , mg/l	
1.0	6.4
0.1	0.9
0.01	0.1

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 241.2 nm at pH 11

REMARKS:


COMPOUND: 2,4-Dichlorophenol
10,000

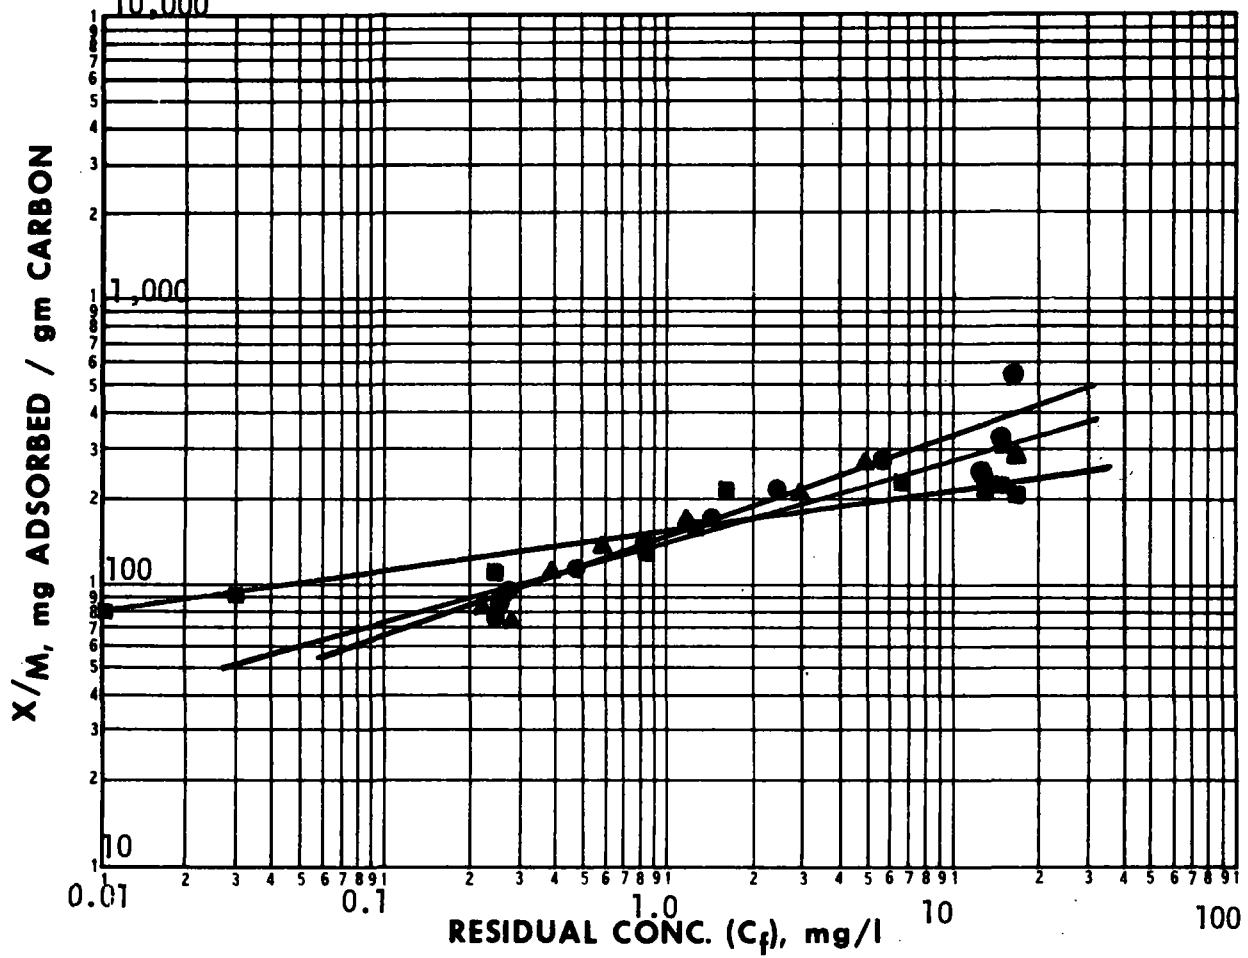

	$\bullet \text{ pH} = 3.0$			$\blacksquare \text{ pH} = 5.3$			$\blacktriangle \text{ pH} = 9$		
CARBON DOSE mg/l	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	19.50			18.14			18.65		
5	16.75	2.75	550	17.10	1.04	208	17.21	1.44	288
10	16.19	3.31	331	15.85	2.29	229	15.60	3.05	305
25	12.90	6.60	264	12.63	5.51	220	12.27	6.38	255
50	5.80	13.70	274	6.56	11.58	232	4.97	13.68	274
75	2.54	16.96	226	1.67	16.47	220	2.99	15.66	209
100	1.57	17.93	179	1.26	16.88	169	1.27	17.38	174
125	0.83	18.67	149	0.82	17.32	139	0.59	18.06	144
150	0.49	19.01	127	0.24	17.90	119	0.39	18.26	122
200	0.28	19.22	96	0.03	18.11	91	0.26	18.39	92
225	0.26	19.24	85	0.01	18.13	81	0.22	18.43	82
250	0.25	19.25	77				0.28	18.37	73

COMPOUND: 1,2-Dichloropropane

STRUCTURE:

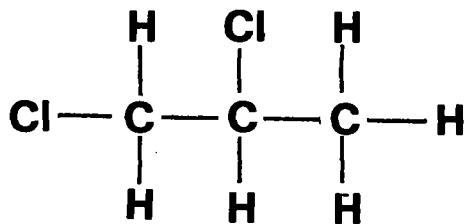

FORMULA: C₃H₆Cl₂ **MOL. WT.** 112.99

FREUNDLICH PARAMETERS	pH		
	5.3		
K	5.86		
1/n	0.60		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	5.9		
0.1	1.5		
0.01	0.37		
0.001	0.09		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C _o , mg/l	0.1	0.01	0.001
1.0	600	2700	11,000
0.1		240	1,100
0.01			96


C _o , mg/l	
1.0	170
0.1	68
0.01	27

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:


COMPOUND: 1,2-Dichloropropane

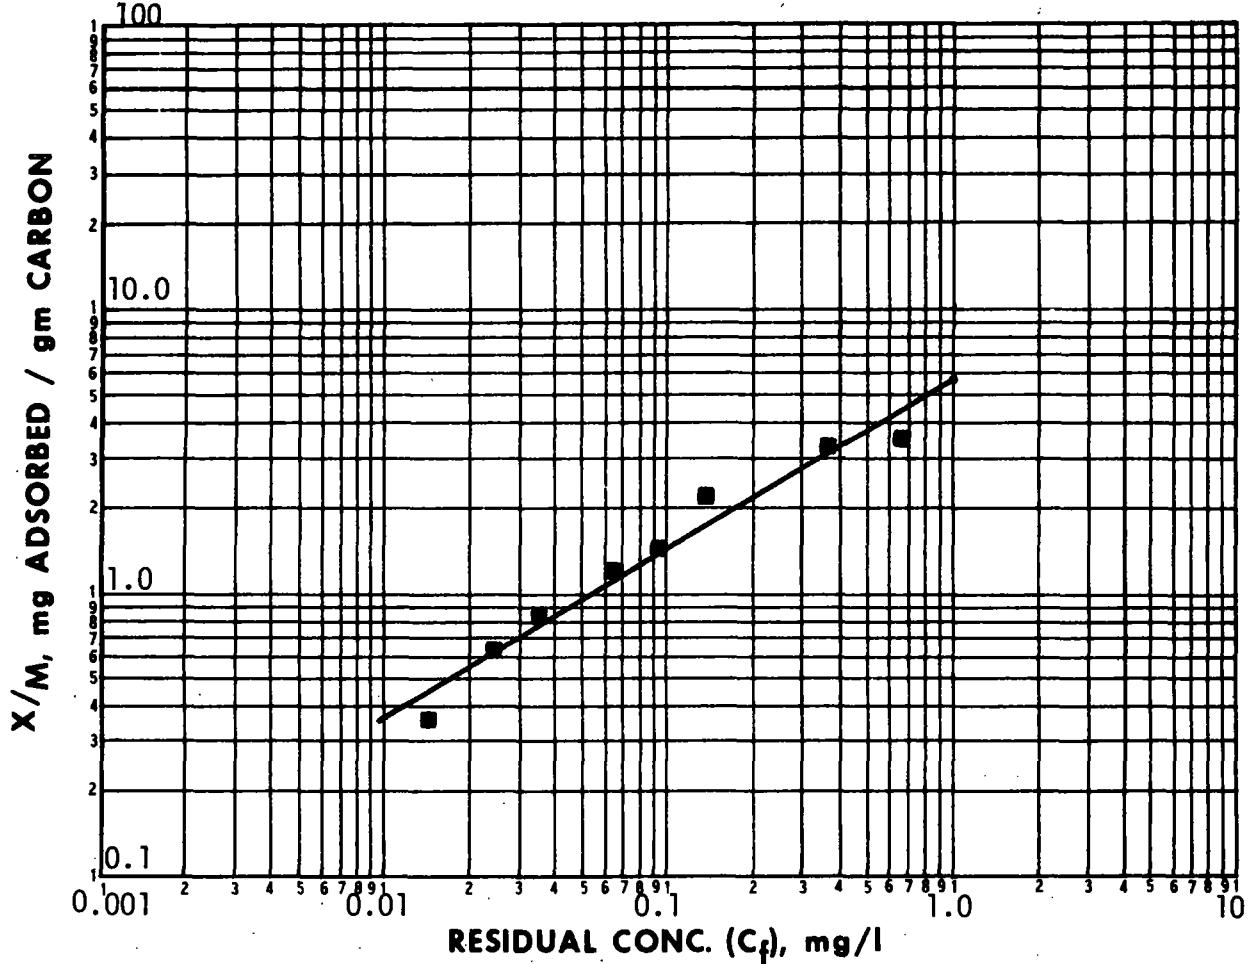

CARBON DOSE mg/l	■ pH = 5.3			pH =			pH =		
	C _f	C ₀ -C _f =X	X/M	C _f	C ₀ -C _f =X	X/M	C _f	C ₀ -C _f =X	X/M
0	1.00								
96	0.654	0.346	3.60						
192	0.370	0.630	3.28						
385	0.143	0.857	2.23						
577	0.0916	0.908	1.57						
769	0.0618	0.938	1.22						
1154	0.0352	0.965	0.836						
1538	0.0238	0.976	0.635						
2692	0.0147	0.985	0.366						

COMPOUND: 1,2-Dichloropropene

STRUCTURE:

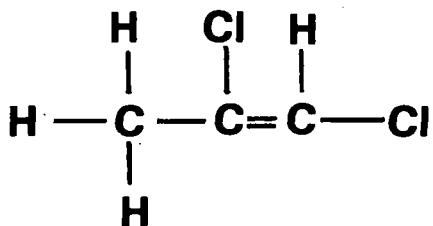

FORMULA: C₃H₄Cl₂ **MOL. WT.** 110.98

FREUNDLICH PARAMETERS	pH		
	5.3		
K	8.21		
1/n	0.46		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	8.2		
0.1	2.8		
0.01	0.97		
0.001	0.33		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C _o , mg/l	0.1	0.01	0.001
1.0	320	1,000	3,000
0.1		93	300
0.01			27


C _o , mg/l	
1.0	120
0.1	35
0.01	10

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:


COMPOUND: 1,2-Dichloropropene

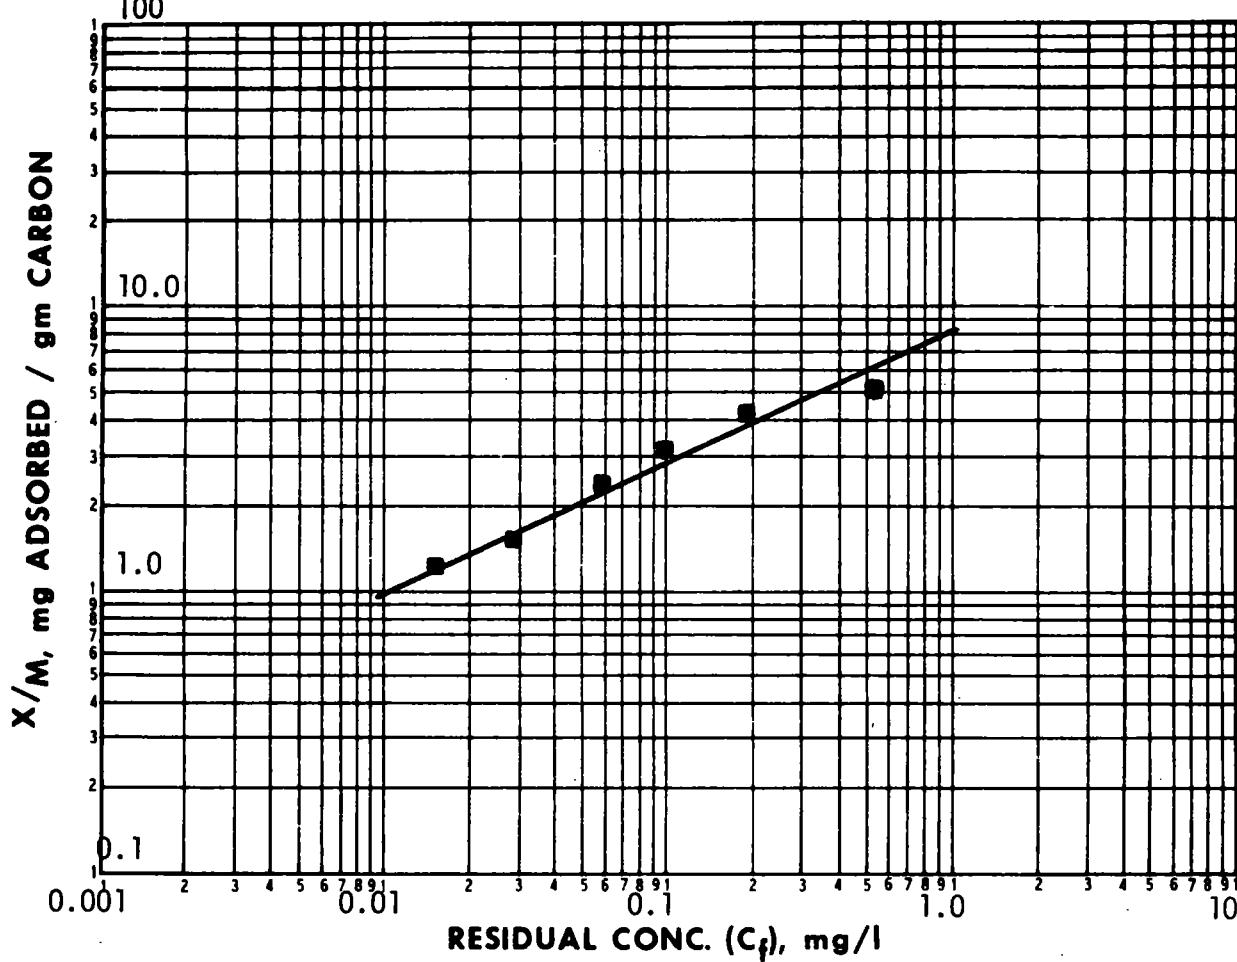

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1,000								
96	0.517	0.483	5.02						
192	0.194	0.806	4.19						
288	0.099	0.901	3.13						
385	0.059	0.941	2.45						
577	0.029	0.971	1.68						
769	0.016	0.984	1.28						
1154	0.012	0.988	0.856						

COMPOUND: Dieldrin

STRUCTURE:

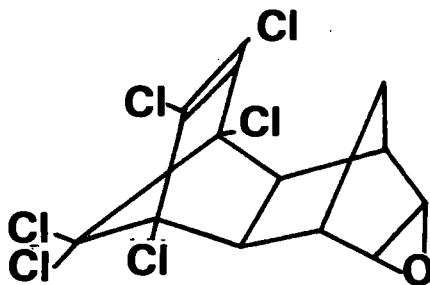

FORMULA: $C_{12}H_8OCl_6$ MOL. WT. 380.91

FREUNDLICH PARAMETERS	pH		
	5.3		
K	606		
1/n	0.51		
Corr. Coef. r	0.94		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	606		
0.1	185		
0.01	57		
0.001	17		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	4.8	17	56
0.1		1.6	5.5
0.01			0.5

GRANULAR CARBON COLUMN


C_o , mg/l	
1.0	1.7
0.1	0.5
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent extraction - G.C.

REMARKS:


COMPOUND: Dieldrin

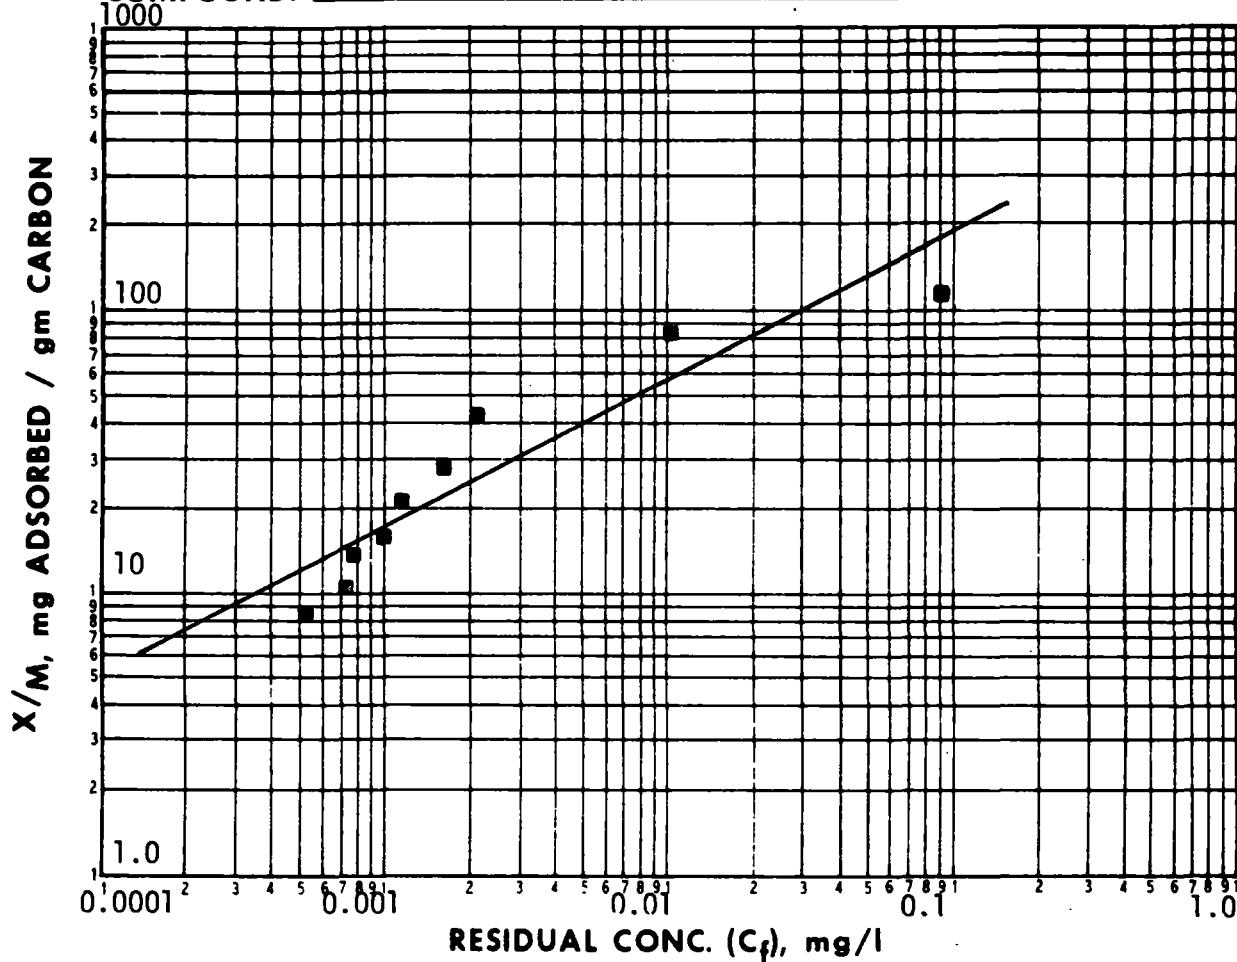

CARBON DOSE (mg/l)	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.212								
1.0	0.0905	0.1215	122						
2.5	0.0104	0.2016	80.6						
5	0.0021	0.2099	42.0						
7.5	0.0017	0.2103	28.0						
10	0.0012	0.2108	21.1						
12.5	0.0010	0.2110	16.9						
15	0.0008	0.2112	14.1						
20	0.0007	0.2113	10.6						
25	0.0005	0.2115	8.46						

COMPOUND: Diethylene glycol

STRUCTURE:

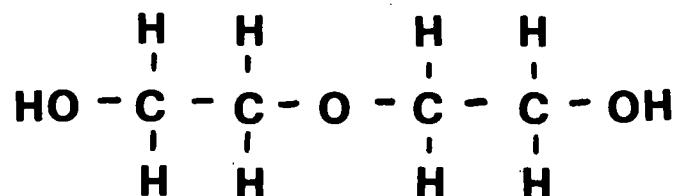

FORMULA: $\text{C}_4\text{H}_{10}\text{O}_3$

MOL. WT. 106.12

FREUNDLICH PARAMETERS	pH		
K			
1/n			
Corr. Coef. r			
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

C_f , mg/l

C_0 , mg/l			

GRANULAR CARBON COLUMN


C_0 , mg/l	

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS: Not adsorbed


COMPOUND: Diethylene glycol

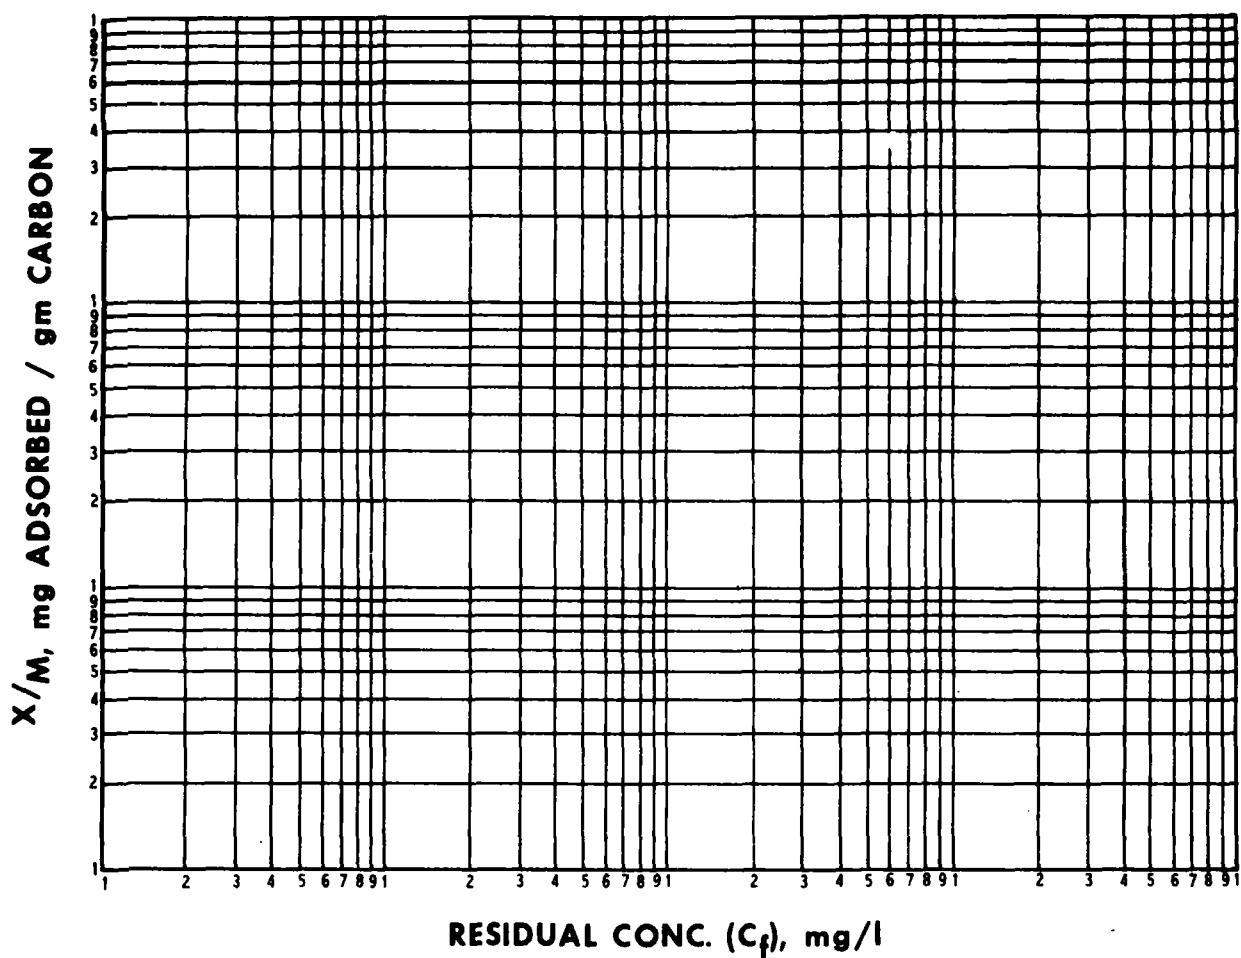

CARBON DOSE mg/l	pH= 3.0			pH= 7.0			pH= 9.0		
	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0	11.8			13.4			11.6		
5	11.0			13.8			11.2		
10	11.2			12.6			11.2		
25	12.0			18.2			11.4		
50	12.0			12.8			11.0		
100	11.0			11.4			11.0		
150	11.0			11.4			10.8		
200	11.0			15.4			11.4		

COMPOUND: Diethyl phthalate

STRUCTURE:

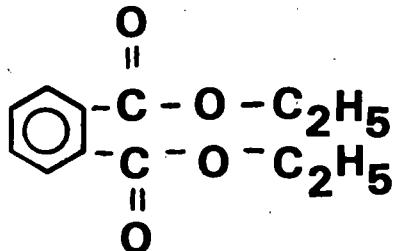

FORMULA: C₁₂H₁₄O₄ **MOL. WT.** 222.24

FREUNDLICH PARAMETERS	pH		
	5.4		
K	110		
1/n	0.27		
Corr. Coef. r	0.81		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	110		
0.1	59		
0.01	32		
0.001	17		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	15	31	59
0.1		2.8	5.8
0.01			0.5


C ₀ , mg/l	
1.0	9.0
0.1	1.7
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 228 nm.

REMARKS:


COMPOUND: Diethyl phthalate

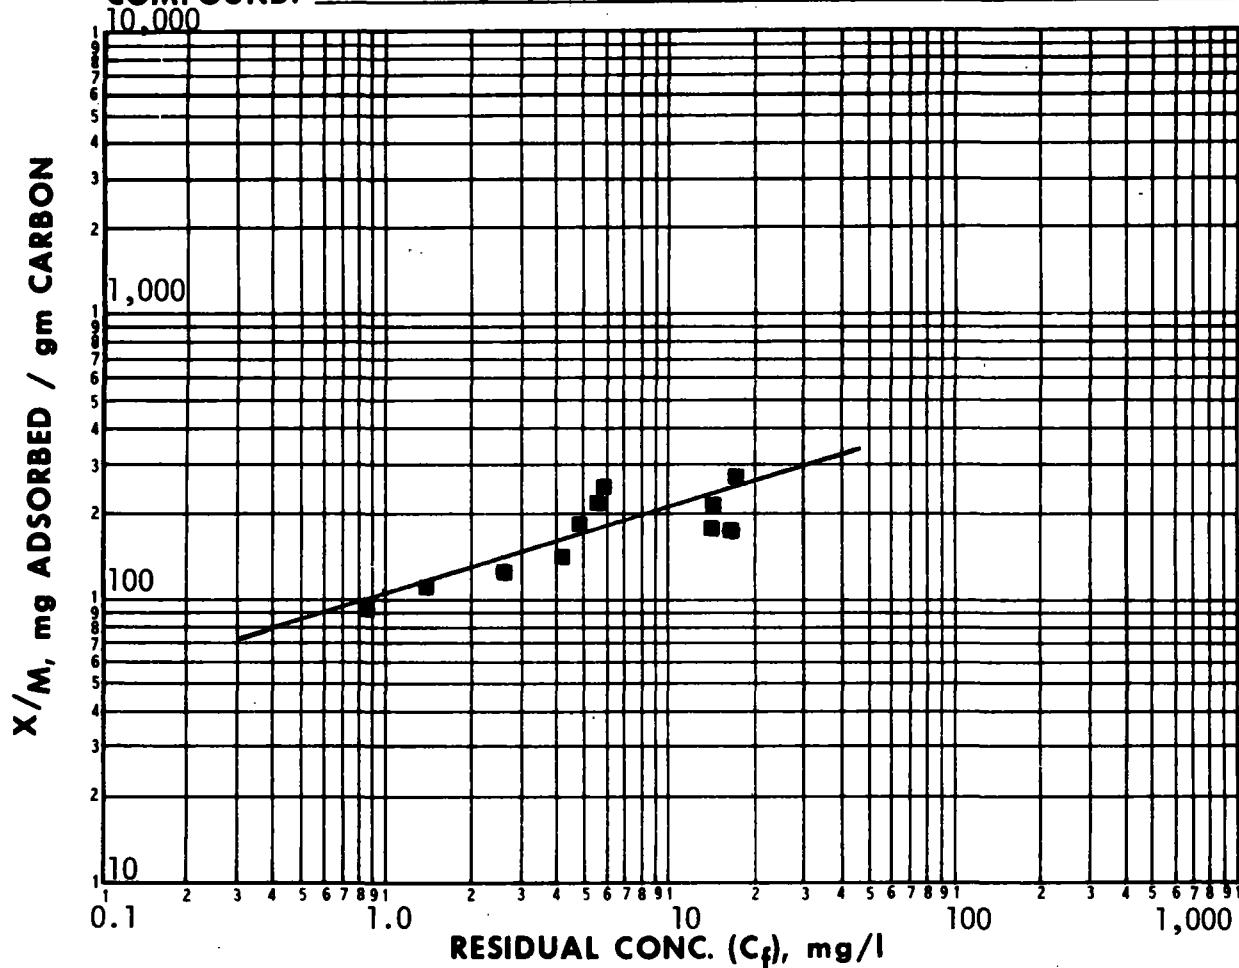

CARBON DOSE mg/l	■ pH= 5.4			pH=			pH=		
	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0	18.88								
4.9	17.47	1.41	283						
9.9	17.11	1.77	179						
19.6	14.65	4.23	216						
24.4	14.41	4.47	183						
49.7	5.89	12.99	261						
59.1	5.64	13.24	224						
72.8	4.88	14.00	192						
99.0	4.13	14.75	149						
121	2.69	16.19	134						
148	1.44	17.44	118						
196	0.86	18.02	92						

COMPOUND: 4-Dimethylaminoazobenzene

STRUCTURE:



FORMULA: C₁₄H₁₅N₃

MOL. WT. 225.3

FREUNDLICH PARAMETERS	pH		
	7.0		
K	249		
1/n	0.24		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	249		
0.1	140		
0.01	83		
0.001	48		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	6.3	12	21
0.1		1.1	2.1
0.01			0.2


C ₀ , mg/l	
1.0	4.0
0.1	0.71
0.01	0.12

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Visible Spectroscopy 450 nm

REMARKS: OSHA regulated carcinogen


COMPOUND: 4-Dimethylaminoazobenzene

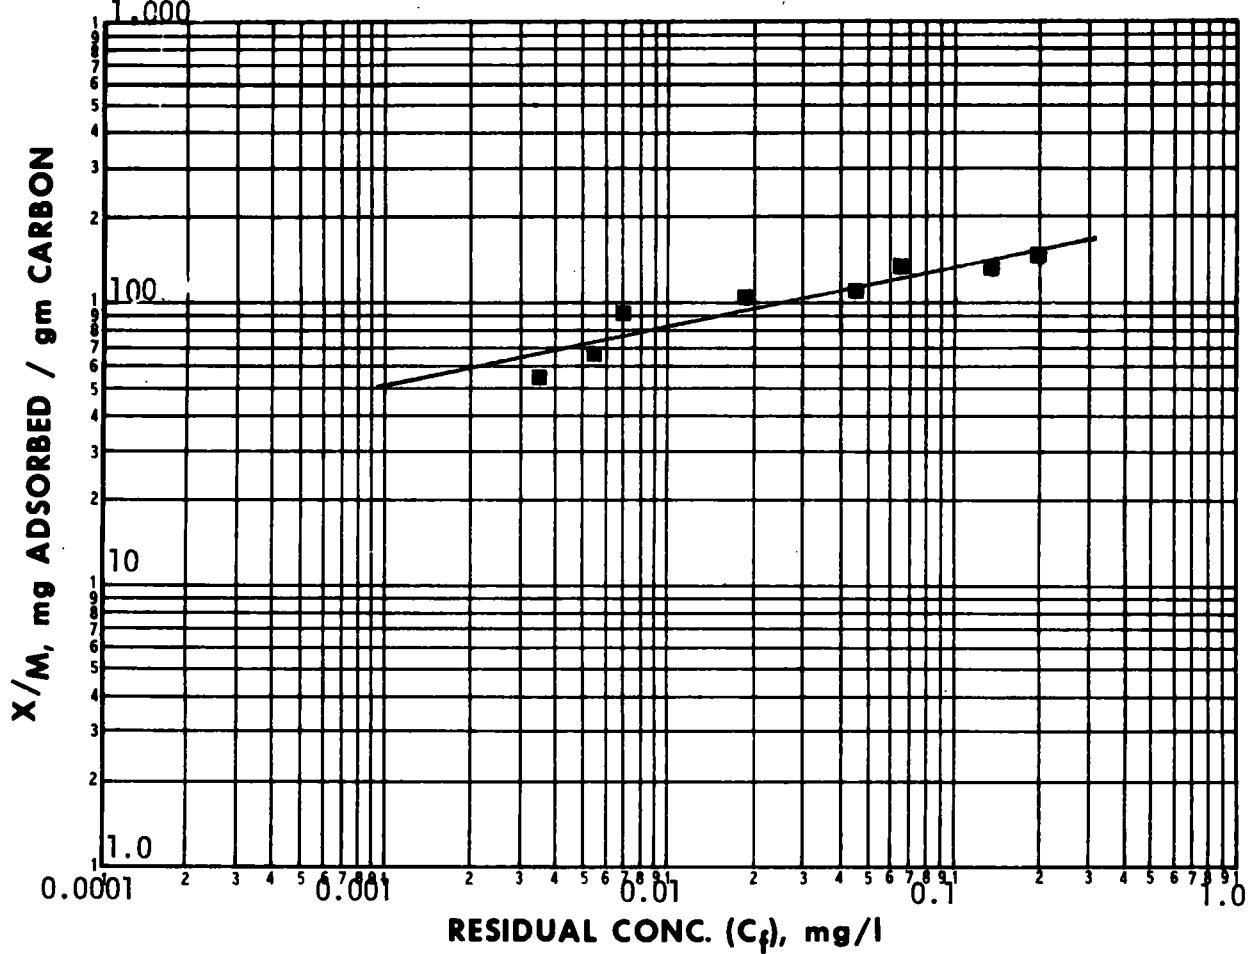

CARBON DOSE mg/l	■ pH = 7.0			pH =			pH =		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.280								
0.5	0.198	0.082	164						
1.0	0.138	0.142	142						
1.5	0.065	0.215	143						
2.0	0.045	0.235	118						
2.5	0.019	0.261	104						
3.0	0.007	0.273	91						
4.0	0.0053	0.275	68.7						
5.0	0.0035	0.276	55.3						

COMPOUND: N-Dimethylnitrosamine

STRUCTURE:

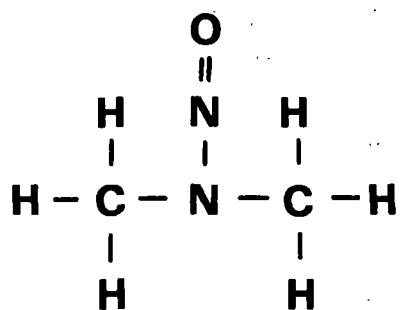

FORMULA: $(\text{CH}_3)_2\text{NNO}$ **MOL. WT.** 74.08

FREUNDLICH PARAMETERS	pH		
	7.5		
K	6.8×10^{-5}		
1/n	6.6		
Corr. Coef. r	0.62		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	250		
1.0	6.8×10^{-5}		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	>100,000	>100,000	>100,000
0.1		>100,000	>100,000
0.01			


C_o , mg/l
1.0
0.1
0.01

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS: OSHA regulated carcinogen.


COMPOUND: N-Dimethylnitrosamine

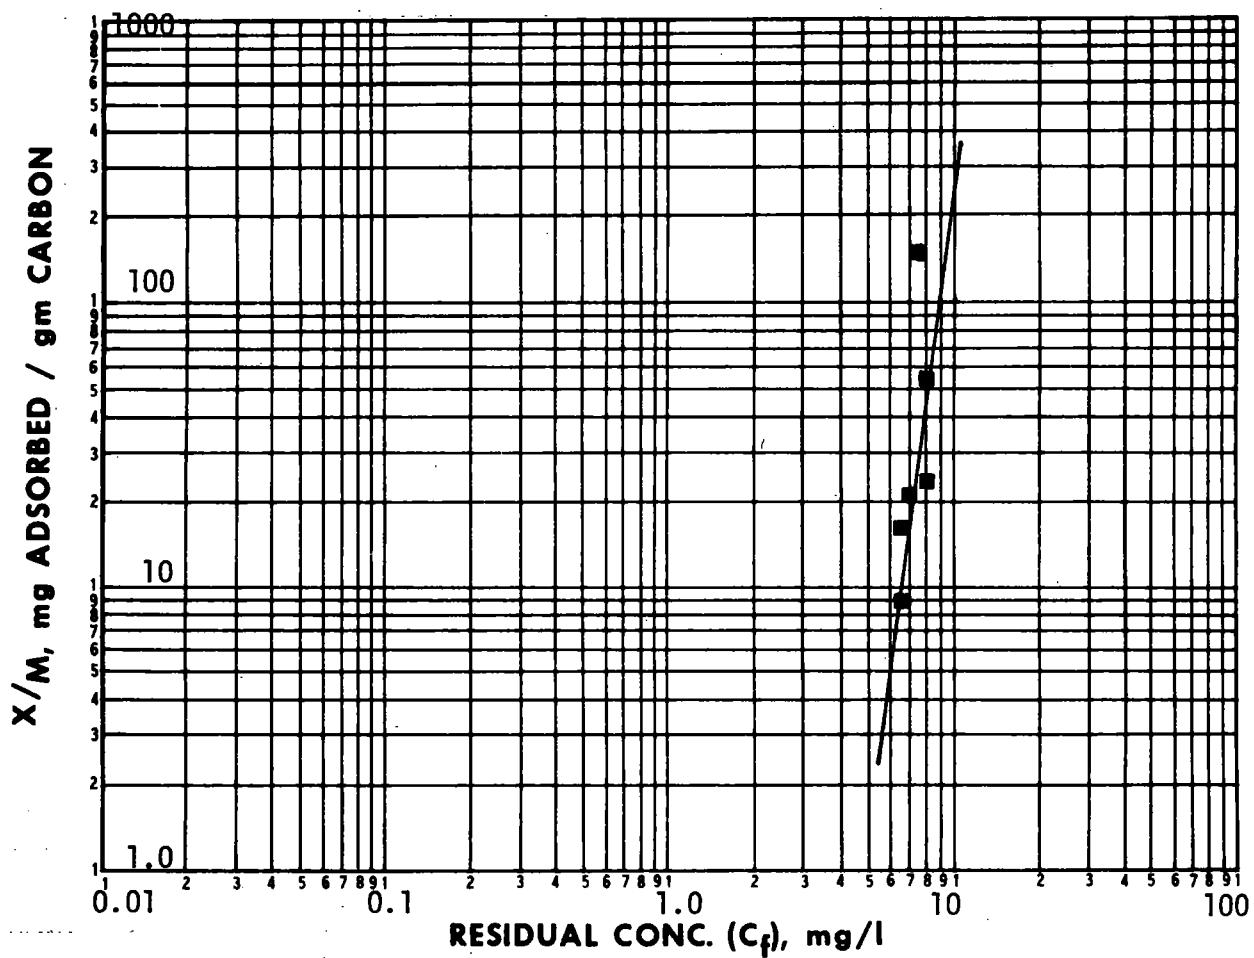

CARBON DOSE mg/l	$\blacksquare \text{ pH}= 7.5$			$\text{pH}=$			$\text{pH}=$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.0								
9.2	7.5	1.5	163						
18.4	8.0	1.0	54						
41.2	8.0	1.0	24						
96.0	7.0	2.0	21						
146.4	6.5	2.5	17						
288.0	6.5	2.5	9						

COMPOUND: 2,4-Dimethylphenol

STRUCTURE:



FORMULA: C₈H₁₀O

MOL. WT. 122.17

FREUNDLICH PARAMETERS	pH		
	3.0	5.8	9.0
K	78	70	108
1/n	0.44	0.44	0.33
Corr. Coef. r	0.93	0.92	0.93
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	78	70	108
0.1	28	25	50
0.01	10	9.1	23
0.001	3.8	3.3	11

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**


SINGLE STAGE POWDERED CARBON			GRANULAR CARBON COLUMN	
C ₀ , mg/l	C _f , mg/l		C ₀ , mg/l	
0.1	0.1	0.01	1.0	14
1.0	36	110	0.1	4.0
0.1		98	0.01	1.0
0.01		30		
		2.7		

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 238 nm at pH 11.

REMARKS:


COMPOUND: 2,4-Dimethylphenol

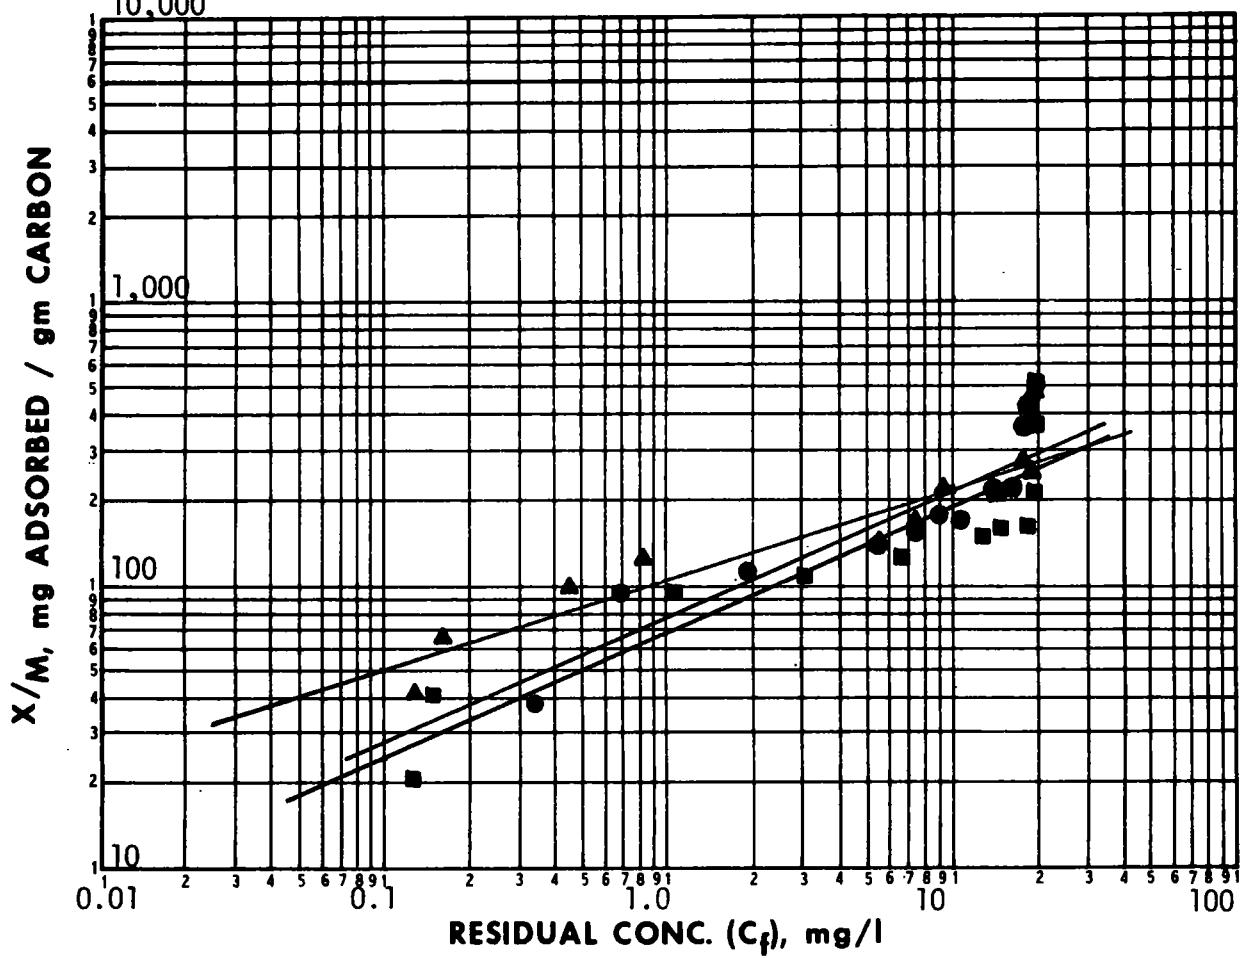

CARBON DOSE mg/l	● pH = 3.0			■ pH = 5.8			▲ pH = 9.0		
	C _f	C ₀ -C _f =X	X/M	C _f	C ₀ -C _f =X	X/M	C _f	C ₀ -C _f =X	X/M
0	19.88			20.36			20.48		
1				19.85	0.51	510			
2.5	18.80	1.08	432	19.42	0.94	376	19.25	1.23	492
5.0	18.02	1.86	372	19.28	1.08	216	19.19	1.29	258
10				18.64	1.72	172	17.62	2.86	286
15	16.49	3.39	226						
25	14.36	5.52	221	16.06	4.30	172	15.36	5.12	205
50	11.04	8.84	177	12.19	8.17	163	9.06	11.42	228
60	9.06	10.82	180						
75	7.49	12.39	165				7.27	13.21	176
100	5.49	14.39	144	6.66	13.7	137	5.46	15.02	150
150	1.95	17.93	120	3.05	17.31	115	0.83	19.65	131
200	0.70	19.18	96	1.14	19.22	96	0.46	20.02	100
300							0.17	20.31	68
500	0.34	19.54	39	0.16	20.20	40	0.13	20.35	41
1000				0.13	20.23	20			

COMPOUND: Dimethylphenylcarbinol

STRUCTURE:

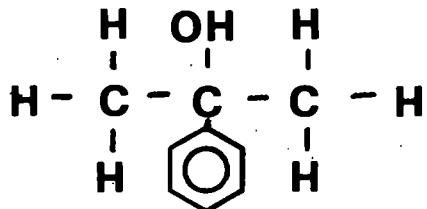

FORMULA: C₉H₁₂O **MOL. WT.** 136.20

FREUNDLICH PARAMETERS	pH	
	3.0	pH 7 and 9 pooled
K	110	210
1/n	0.60	0.34
Corr. Coef. r	0.98	0.98
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm	
10	420	460
1.0	110	210
0.1	27	97
0.01	6.7	44

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	9.0	21	46
0.1		1.9	4.5
0.01			0.41


C ₀ , mg/l	
1.0	4.7
0.1	1.0
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 244 nm

REMARKS:


COMPOUND: Dimethylphenylcarbinol

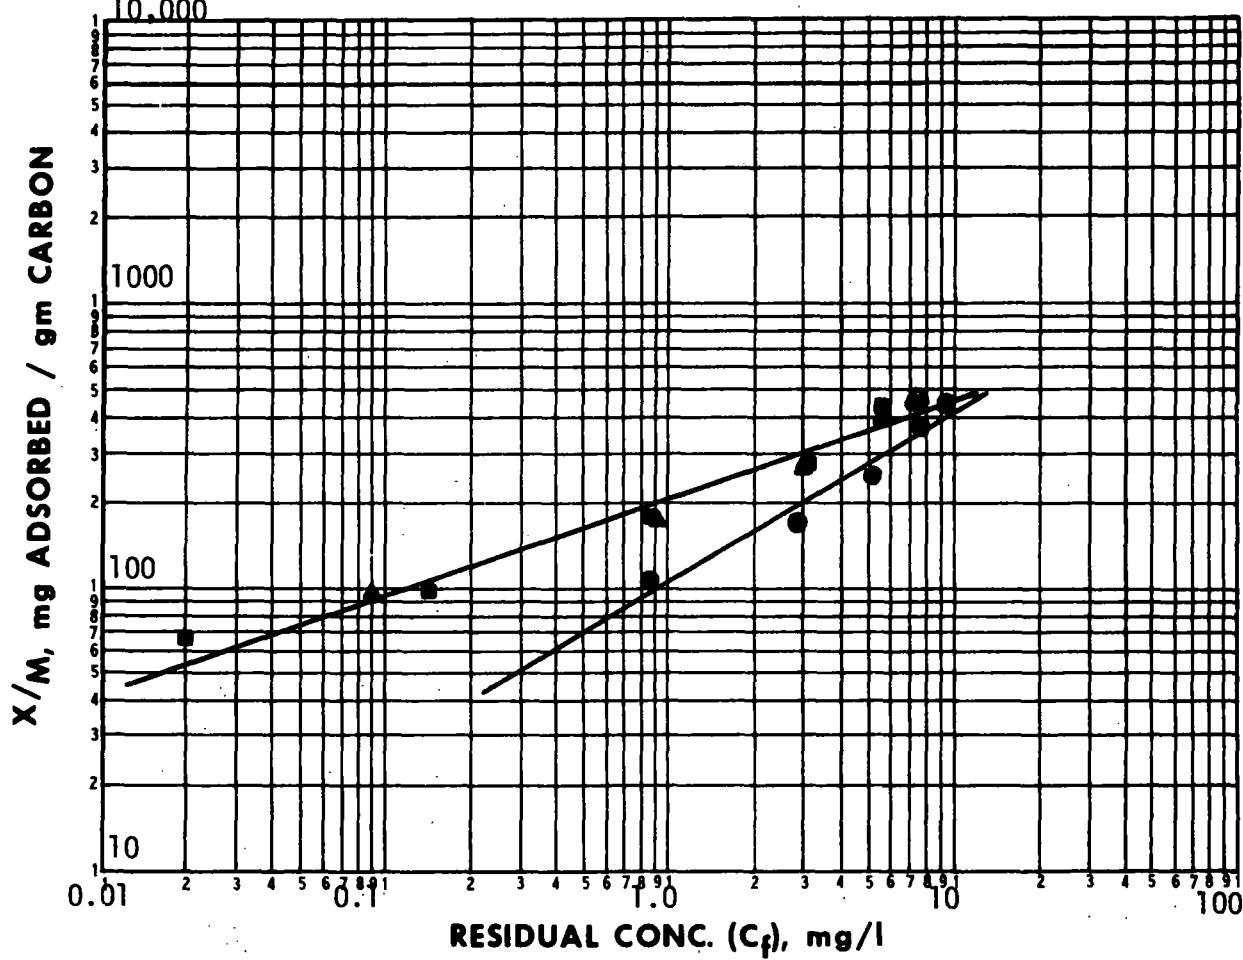

CARBON DOSE mg/l	$\bullet \text{ pH} = 3.0$			$\square \text{ pH} = 7.0$			$\bullet \text{ pH} = 9.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	11.64			10.00			9.69		
5	9.37	2.27	454	7.64	2.36	472	7.37	2.32	464
10	7.85	3.79	379	5.66	4.34	434	5.72	3.97	397
25	5.22	6.42	257	3.08	6.92	277	3.02	6.67	267
50	2.97	8.67	173	0.88	9.12	182	0.92	8.77	175
100	0.88	10.8	108	0.15	9.85	99	0.09	9.60	96
150				0.02	9.98	67			

COMPOUND: Dimethyl phthalate

STRUCTURE:

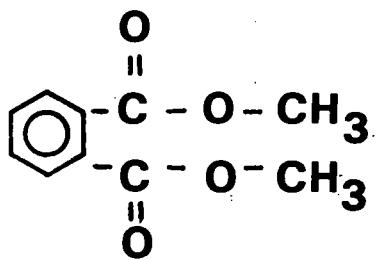

FORMULA: $C_{10}H_{10}O_4$ MOL. WT. 194.18

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	97		
1/n	0.41		
Corr. Coef. r	0.93		

INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
	250		
10	250		
1.0	97		
0.1	38		
0.01	15		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l


C_o , mg/l	0.1	0.01	0.001	C_o , mg/l	
1.0	24	67	180	1.0	9.9
0.1		6.1	17	0.1	2.6
0.01			1.6	0.01	0.7

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 230 nm

REMARKS:


COMPOUND: Dimethyl phthalate

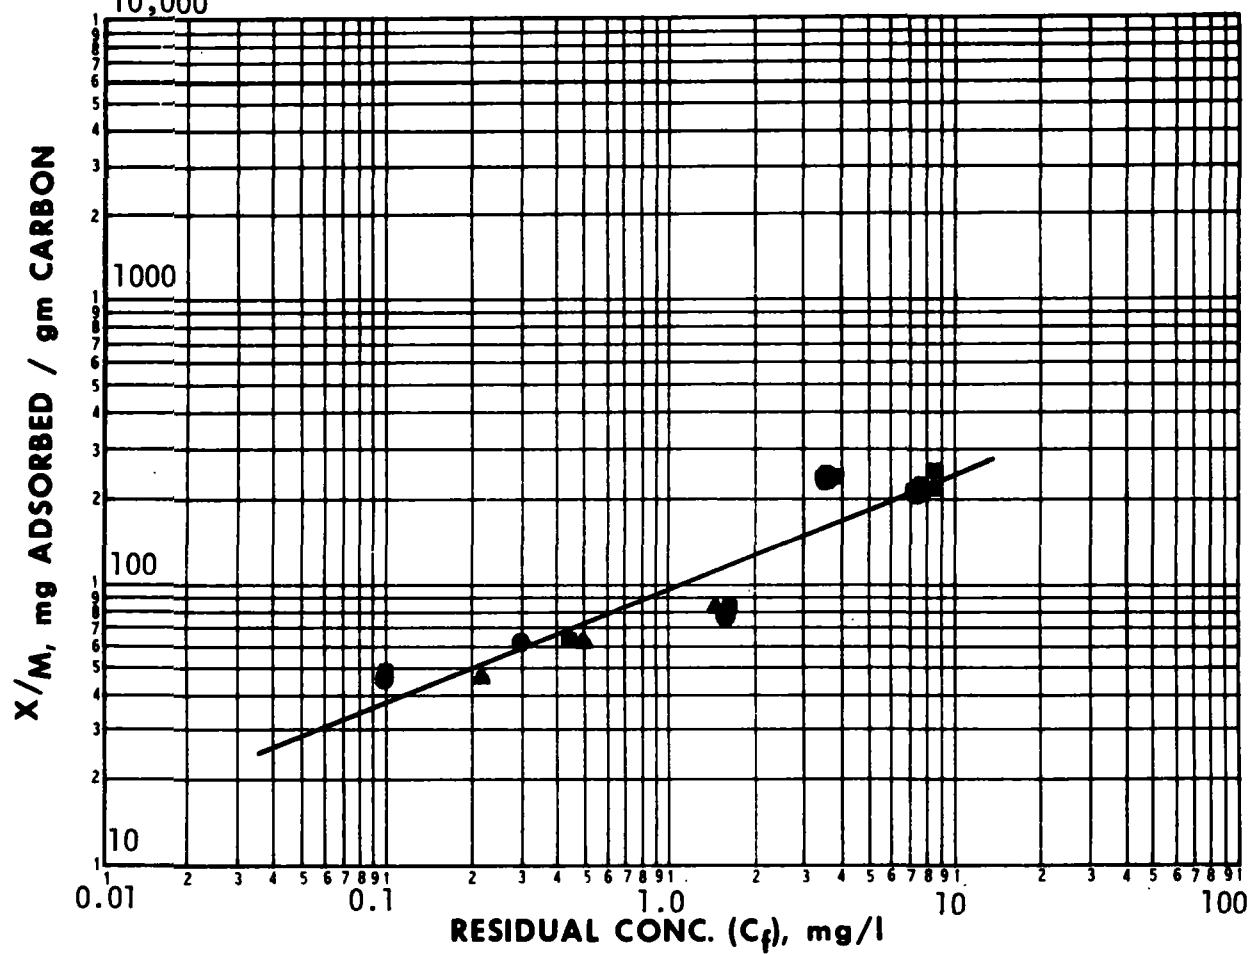

CARBON DOSE mg/l	pH = 3.0			pH = 7.0			pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.50			9.90			9.60		
5				8.65	1.25	250	8.50	1.10	220
10	7.40	2.10	210	7.65	2.25	225	7.50	2.10	210
25	3.55	5.95	238	3.90	6.00	240	3.65	5.95	238
100	1.70	7.80	78	1.67	8.23	82	1.55	8.05	81
150	0.30	9.20	61	0.43	9.47	63	0.50	9.10	61
200	0.10	9.40	47	0.10	9.80	49	0.22	9.38	47

COMPOUND: 4,6-Dinitro-o-cresol

STRUCTURE:



FORMULA: C₇H₆N₂O₅

MOL. WT. 198.14

FREUNDLICH PARAMETERS	pH		
	3.0	5.2	9.0
K	237	169	42.74
1/n	0.32	35	0.90
Corr. Coef. r	0.97	0.98	0.99
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	237	169	43
0.1	114	76	5.3
0.01	55	34	0.7
0.001	26	15	0.1

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	12	28	63
0.1		2.6	6.2
0.01			0.6


C ₀ , mg/l	
1.0	6.0
0.1	1.3
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 271 nm

REMARKS:


COMPOUND: 4,6-Dinitro-o-cresol

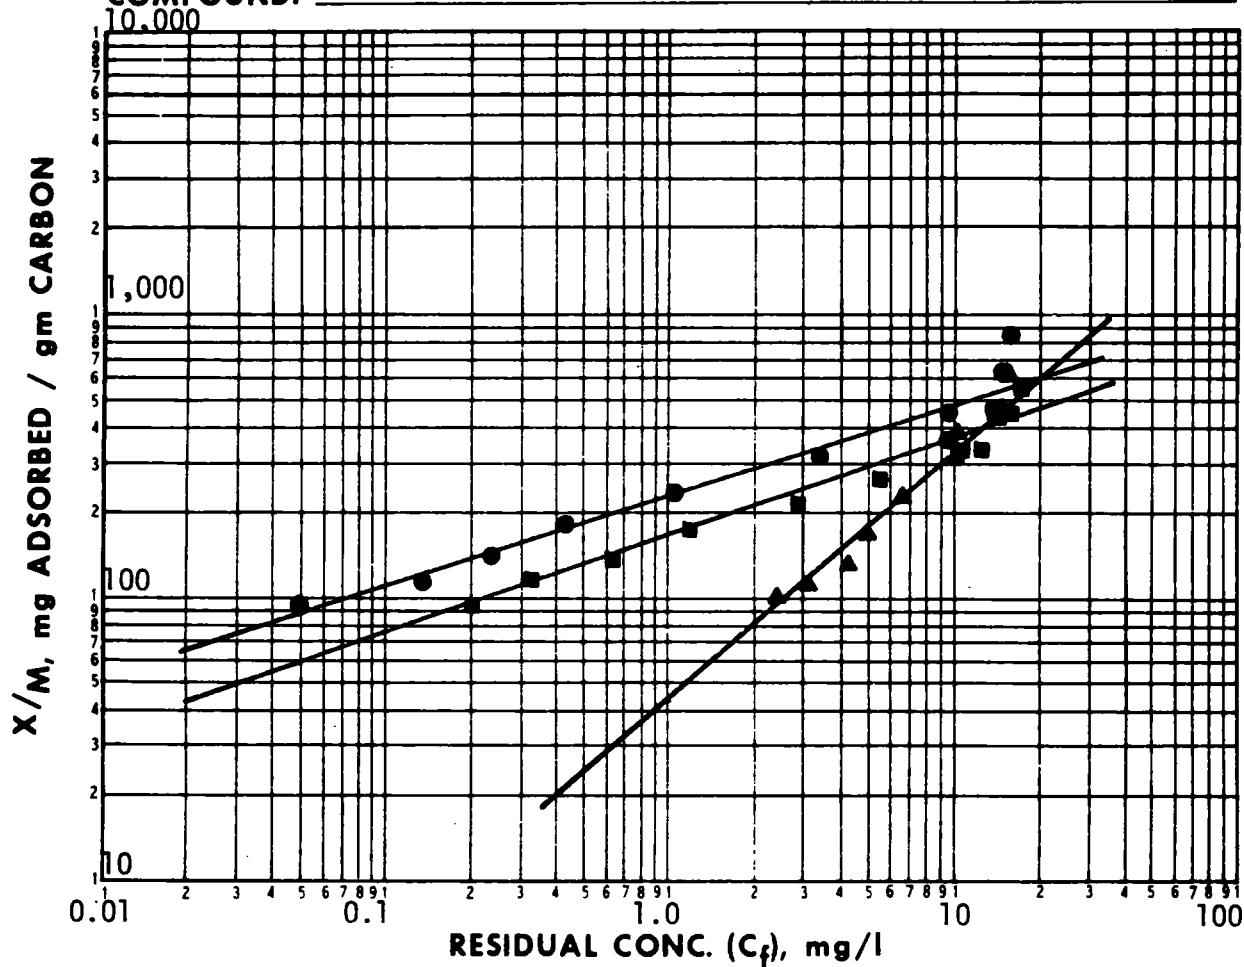

CARBON DOSE mg/l	● pH = 3.0			■ pH = 5.2			▲ pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	19.09			19.05			18.06		
2.5	16.95	2.14	856	17.65	1.40	560	16.52	1.54	616
5	15.90	3.19	638	16.78	2.27	454	15.66	2.40	480
10	14.36	4.73	473	14.52	4.53	453	13.68	4.38	438
20	9.79	9.30	465	12.24	6.81	340	10.12	7.94	397
25	9.77	9.32	373	10.70	8.35	334	10.08	7.98	319
50	3.39	15.70	314	5.42	13.63	273	6.63	11.43	229
75	1.10	17.99	248	2.85	16.20	216	4.99	13.07	174
100	0.43	18.66	187	1.18	17.87	179	4.10	13.96	140
125	0.23	18.86	151	0.62	18.43	147	3.16	14.90	119
150	0.14	18.95	126	0.32	18.73	125	2.36	15.70	105
200	0.05	19.04	95	0.20	18.85	94.2			

COMPOUND: 2,4-Dinitrophenol

STRUCTURE:



FORMULA: C₆H₄N₂O₅

MOL. WT. 184.11

FREUNDLICH PARAMETERS	pH		
	3.0	7.0	9.0
K	160	33	41
1/n	0.37	0.61	0.25
Corr. Coef. r	0.99	0.89	0.87
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	380	140	73
1.0	160	33	41
0.1	69	8.0	23
0.01	29	1.9	13

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

<i>C_o</i> , mg/l	0.1	0.01	0.001
1.0	110	500	2,100
0.1		45	200
0.01			18

GRANULAR CARBON COLUMN


<i>C_o</i> , mg/l	
1.0	30
0.1	13
0.01	5.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 260 nm

REMARKS:


COMPOUND: 2,4-Dinitrophenol

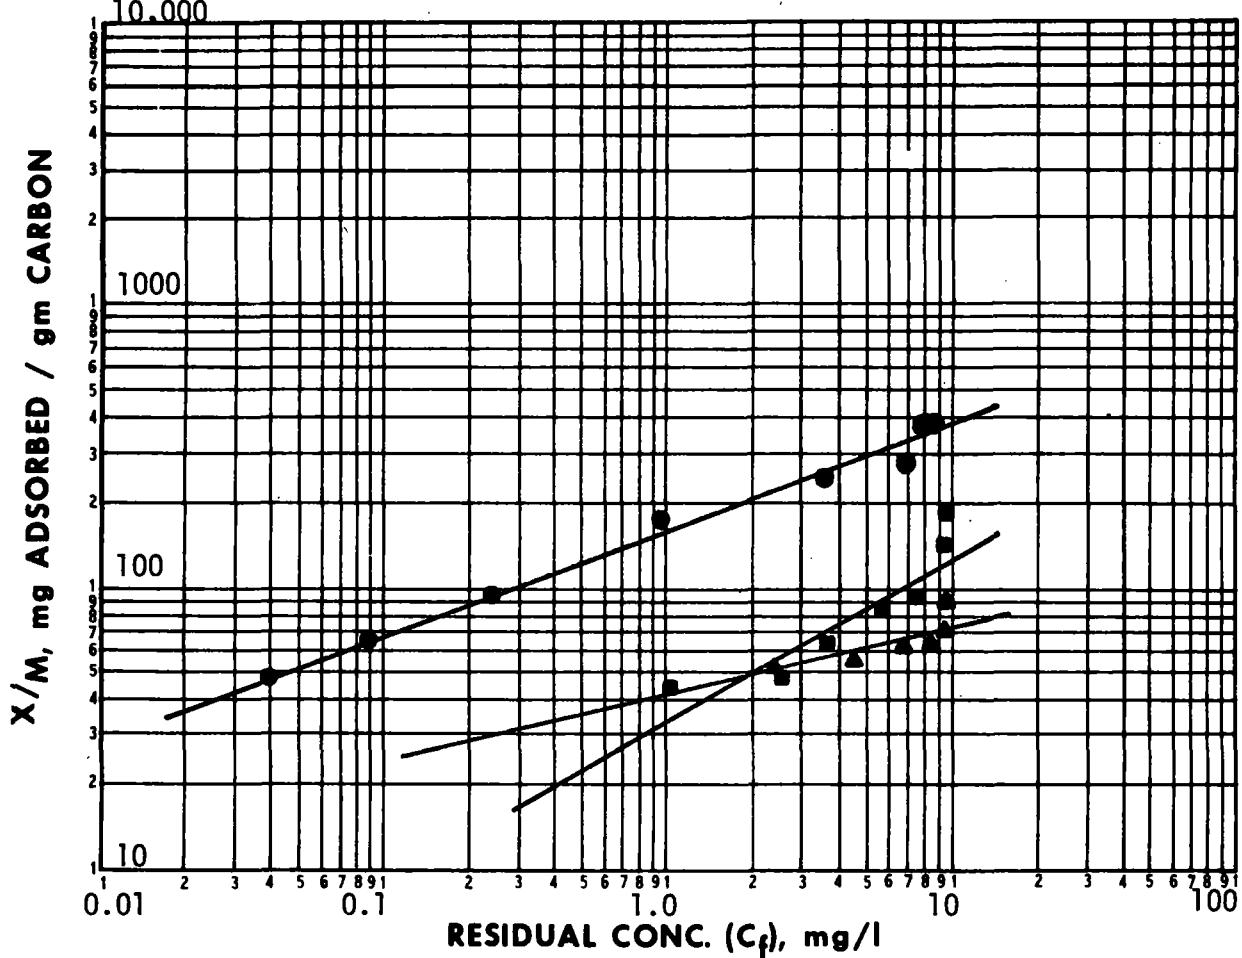

CARBON DOSE mg/l	$\bullet \text{ pH} = 3.0$			$\blacksquare \text{ pH} = 7.0$			$\bullet \text{ pH} = 9.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.88			9.95			9.97		
2.5	8.90	0.98	392	9.48	0.47	188			
5	7.95	1.93	386	9.19	0.76	152	9.52	0.45	90
10	7.02	2.86	286				9.27	0.70	70
25	3.66	6.22	248	7.63	2.32	93	8.39	1.58	63
50	0.98	8.90	178	5.83	4.12	82	6.93	3.04	61
100	0.24	9.64	96	3.69	6.26	63	4.49	5.48	55
150	0.09	9.79	65	2.69	7.26	48	2.30	7.67	51
200	0.04	9.84	49	1.06	8.89	44	1.14	8.83	44

COMPOUND: 2,4-Dinitrotoluene

STRUCTURE:



FORMULA: $\text{C}_7\text{H}_6\text{N}_2\text{O}_4$ **MOL. WT.** 182.14

FREUNDLICH PARAMETERS	pH		
	5.4		
K	146		
1/n	0.31		
Corr. Coef. r	0.94		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	146		
0.1	71		
0.01	34		
0.01	17		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_o , mg/l	0.1	0.01	0.001
1.0	13	29	59
0.1		2.6	5.9
0.01			0.5


C_o , mg/l
1.0
0.1
0.01

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 252 nm.

REMARKS:


2,4-Dinitrotoluene

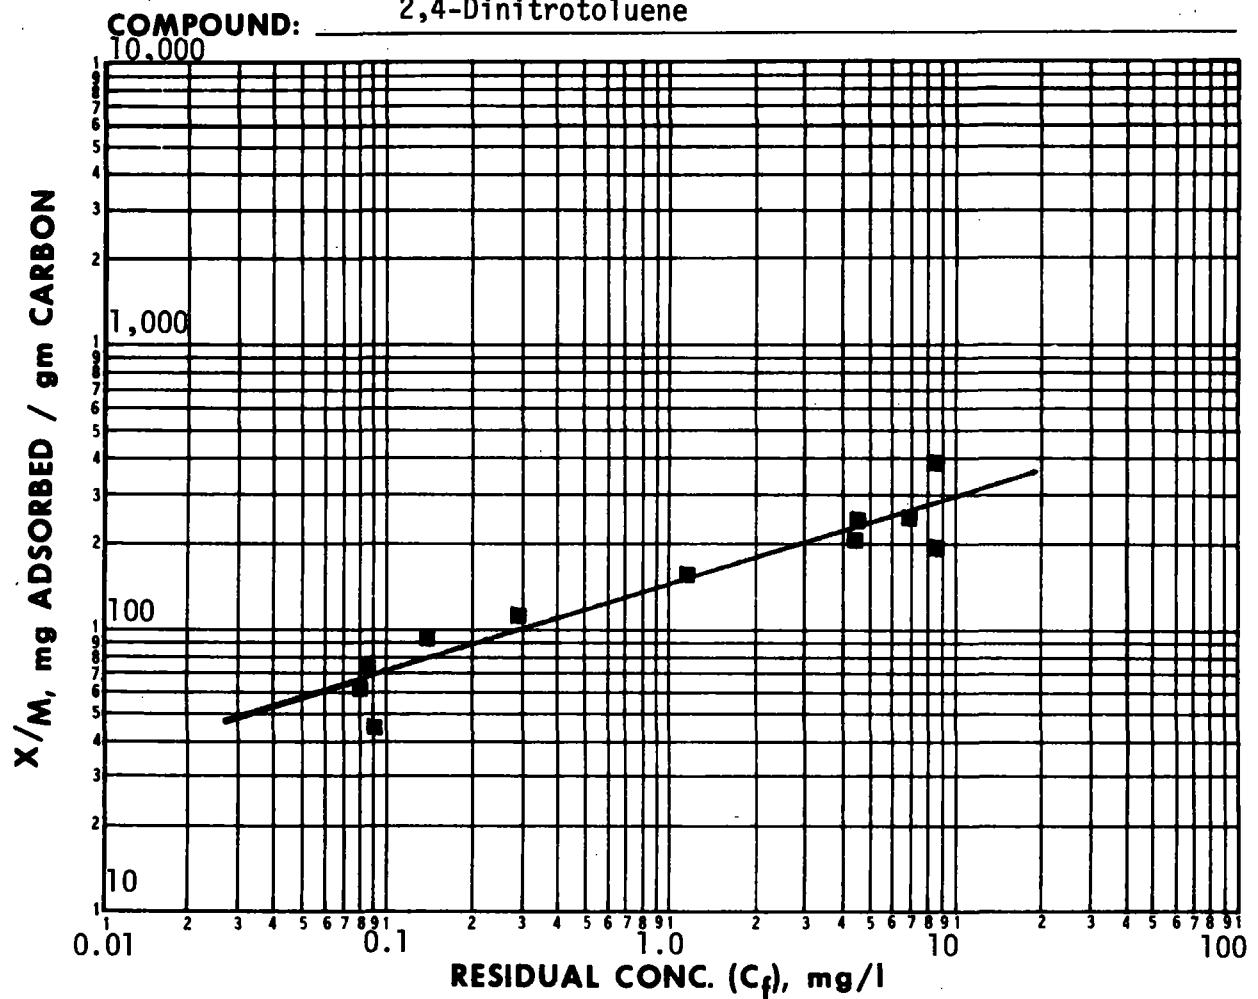

CARBON DOSE mg/l	■ pH = 5.4			pH =			pH =		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.46								
2.5	8.46	1.00	400						
5	8.48	0.980	196						
10	6.92	2.54	254						
20	4.42	5.04	252						
25	4.31	5.15	206						
50	1.16	8.30	166						
75	0.290	9.17	122						
100	0.140	9.32	93						
125	0.085	9.38	75						
150	0.080	9.38	63						
200	0.090	9.37	47						

COMPOUND: 2,6-Dinitrotoluene

STRUCTURE:



FORMULA: C₇H₆N₂O₄ **MOL. WT.** 182.14

FREUNDLICH PARAMETERS	pH		
	5.4		
K	145		
1/n	0.32		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	145		
0.1	70		
0.01	33		
0.001	16		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l


C _o , mg/l	0.1	0.01	0.001
1.0	13	30	62
0.1		2.7	6.2
0.01			0.6

C _o , mg/l	
1.0	6.9
0.1	1.4
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 242 nm.


REMARKS:

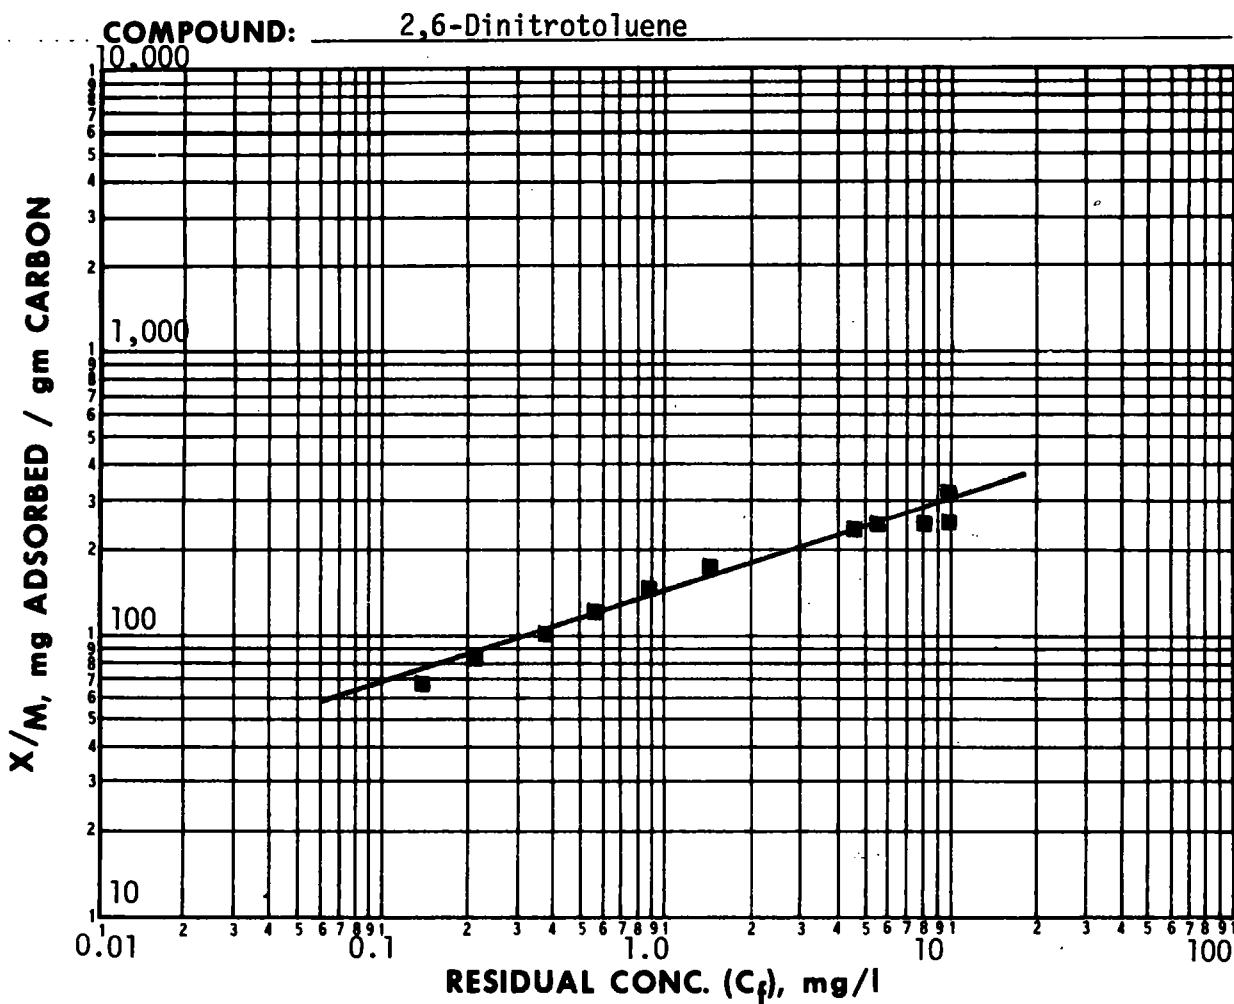

CARBON DOSE mg/l	■ pH = 5.4			pH =			pH =		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	10.58								
2.5	9.80	0.780	312						
5	9.28	1.30	260						
10	8.00	2.58	258						
20	5.48	5.10	255						
25	4.50	6.08	243						
50	1.45	9.13	183						
60	0.89	9.69	162						
75	0.56	10.02	134						
100	0.38	10.20	102						
125	0.21	10.37	83						
150	0.14	10.44	70						

COMPOUND: Diphenylamine

STRUCTURE:



FORMULA: C₁₂H₁₁N **MOL. WT.** 169.24

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	120		
1/n	0.31		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	240		
1.0	120		
0.1	57		
0.01	28		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON **GRANULAR CARBON COLUMN**
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	16	35	72
0.1		3.2	7.2
0.01			0.65


C ₀ , mg/l	
1.0	8.5
0.1	1.8
0.01	0.4

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 279 nm

REMARKS:


COMPOUND: Diphenylamine

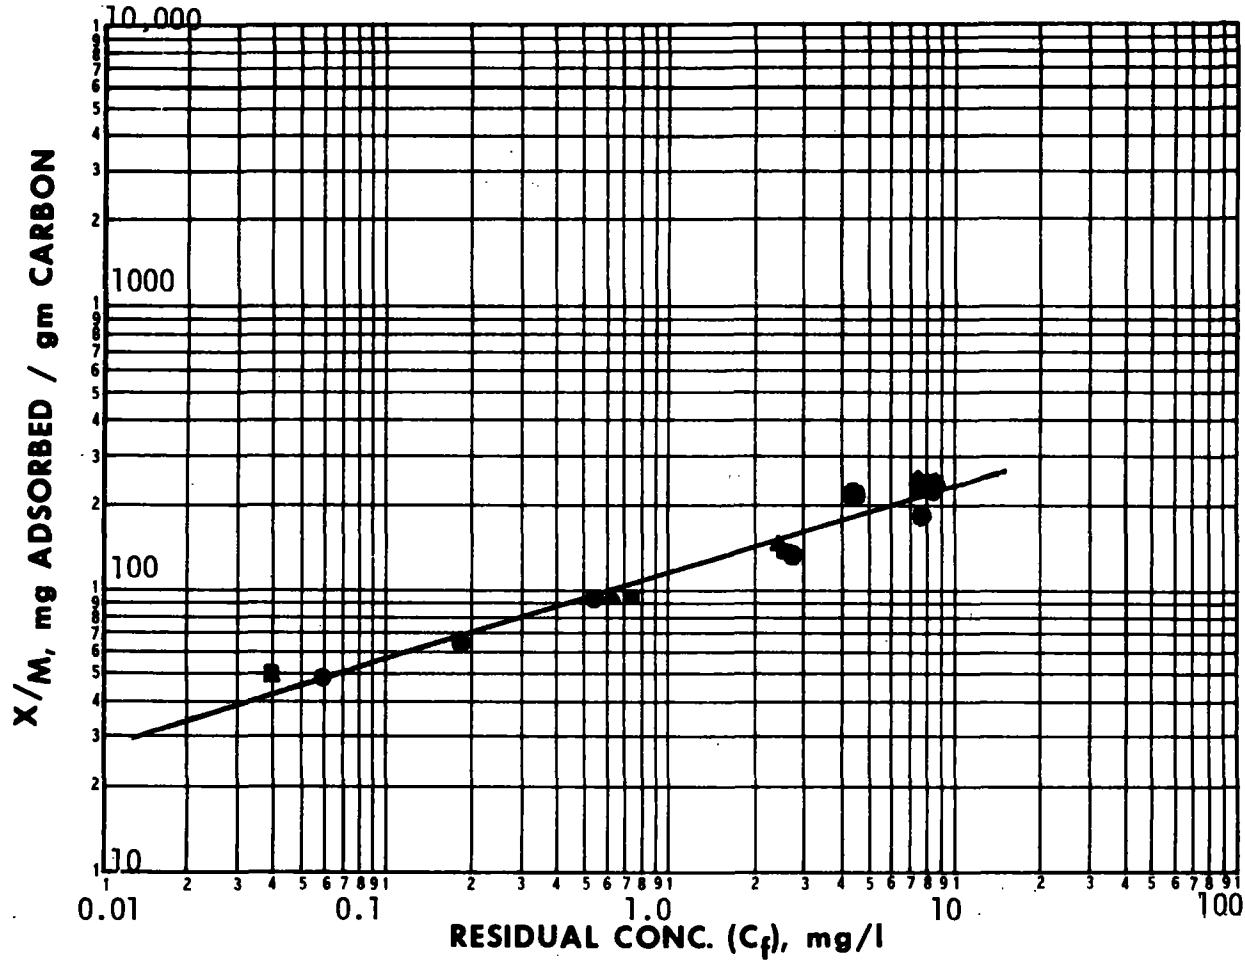

CARBON DOSE mg/l	$\bullet \text{ pH} = 3.0$			$\blacksquare \text{ pH} = 7.0$			$\blacktriangle \text{ pH} = 9.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.80			10.00			9.88		
5	8.64	1.16	232	8.80	1.20	240	8.70	1.18	236
10	7.88	1.92	192	7.73	2.27	227	7.42	2.46	246
25	4.38	5.42	217	4.45	5.55	222	4.37	5.51	220
50	2.82	6.98	140	2.65	7.35	147	2.51	7.37	147
100	0.55	9.25	93	0.73	9.27	93	0.62	9.26	93
150	0.19	9.61	64	0.19	9.81	65	0.19	9.69	65
200	0.06	9.74	49	0.04	9.96	50	0.04	9.84	49

COMPOUND: 1,1-Diphenylhydrazine

STRUCTURE:



FORMULA: C₁₂H₁₂N₂

MOL. WT. 184.24

FREUNDLICH PARAMETERS	pH		
	7.5		
K	135		
1/n	0.16		
Corr. Coef. r	0.75		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	194		
1.0	135		
0.1	94		
0.01	65		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	10	15	22
0.1		1.4	2.2
0.01			0.2


C ₀ , mg/l	
1.0	7.4
0.1	1.1
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 230 nm


REMARKS:

COMPOUND: 1,1-Diphenylhydrazine

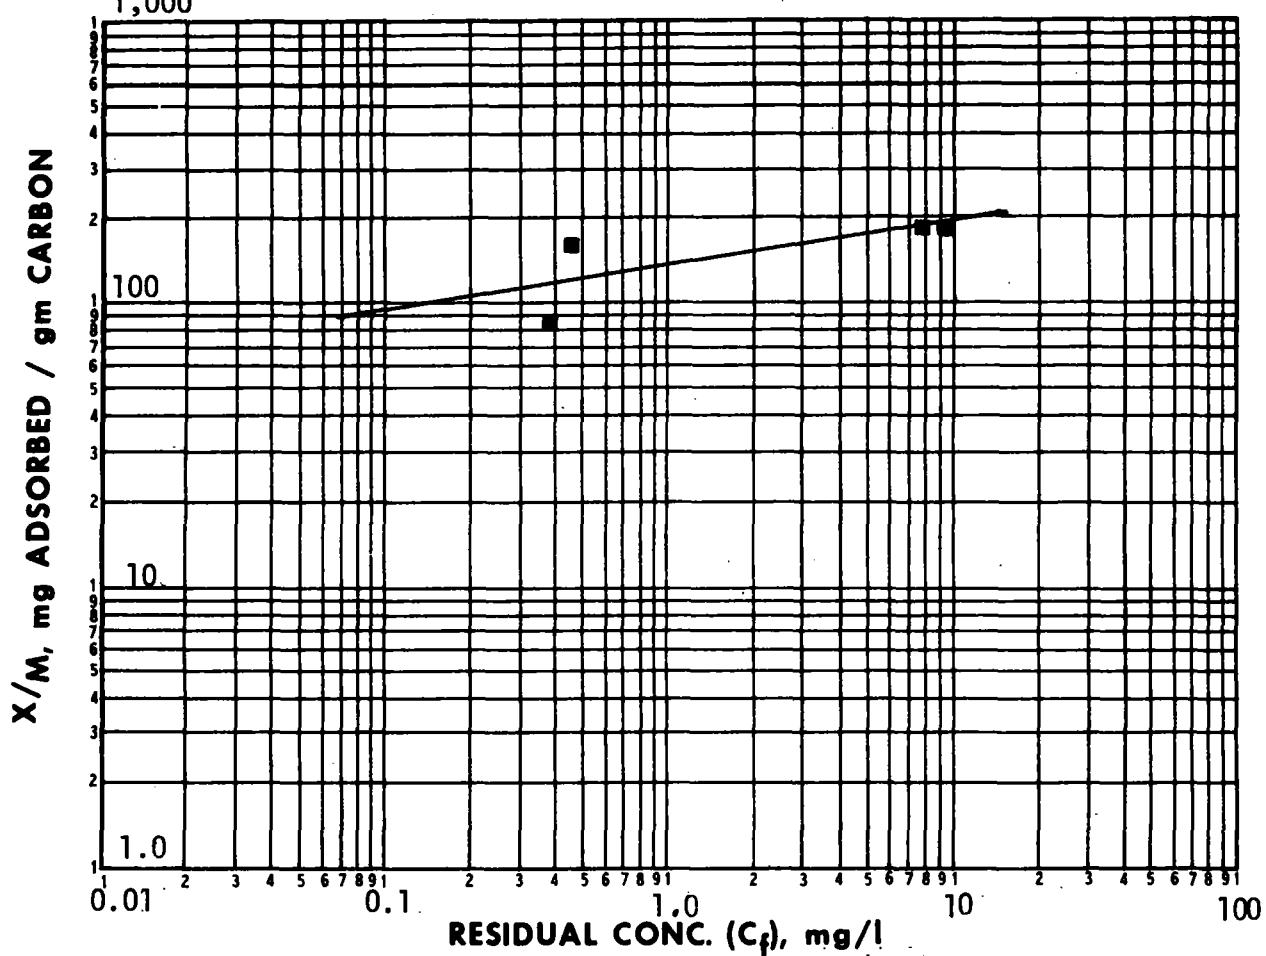

COMPOUND: 1,2-Diphenylhydrazine

STRUCTURE:



FORMULA: C₁₂H₁₂N₂ **MOL. WT.** 184.24

FREUNDLICH PARAMETERS	pH		
	5.3		
K	16,000		
1/n	2.0		
Corr. Coef. r	0.95		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1	16,000		
0.1	160		
0.01	1.5		
0.001	0.015		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	5.7	630	63,000
0.1		57	6,200
0.01			570


C ₀ , mg/l	
1.0	0.06
0.1	0.64
0.01	6.7

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS: Rapid oxidation to azobenzene; azobenzene solubility is 0.25 mg/l.


COMPOUND: 1,2-Diphenylhydrazine

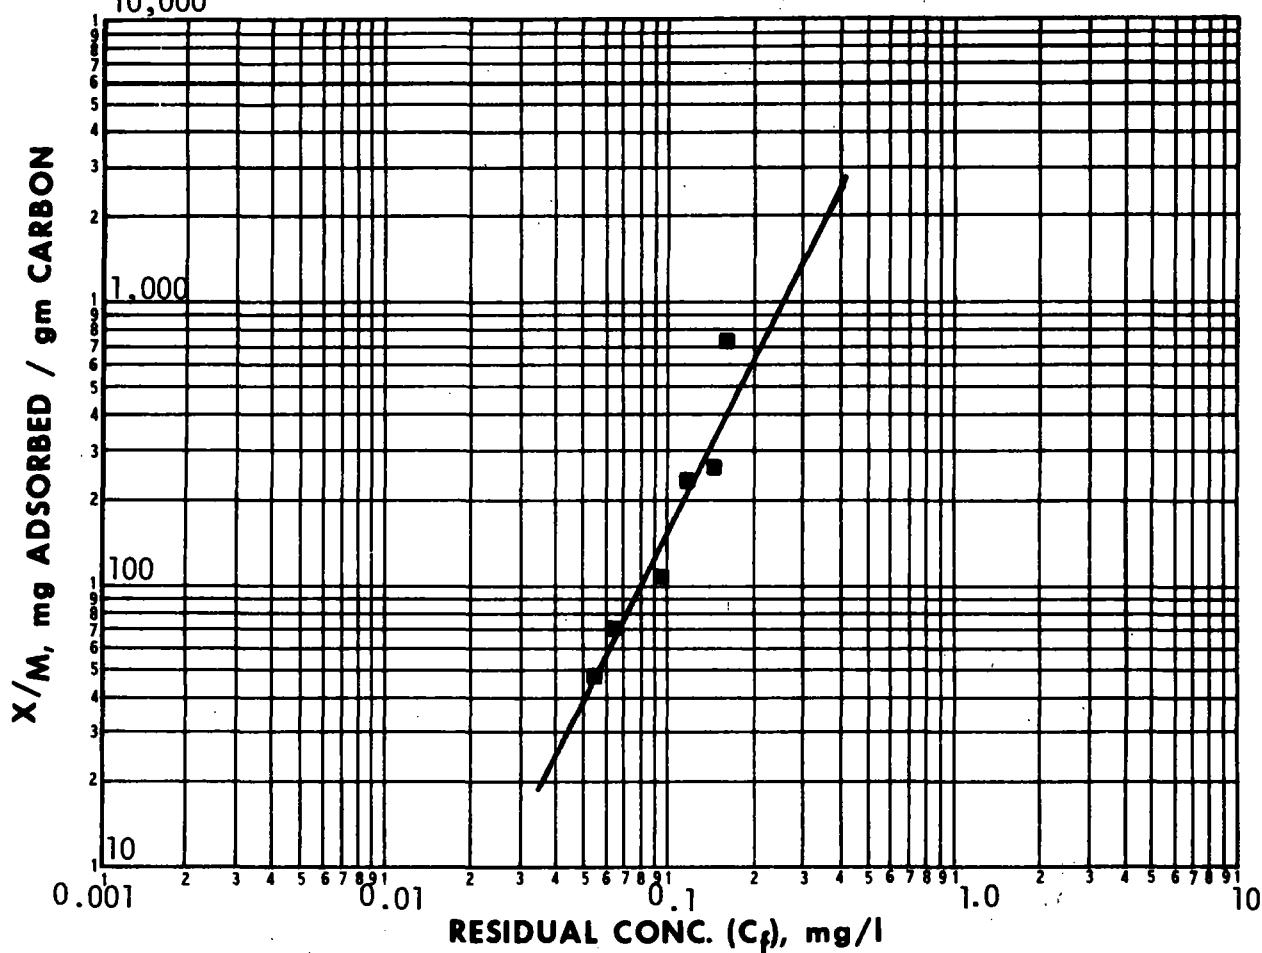

CARBON DOSE mg/l	■ pH = 5.3			pH =			pH =		
	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0	0.238								
0.1	0.167	0.071	710						
0.3	0.158	0.080	267						
0.5	0.123	0.115	230						
1.3	0.0958	0.142	109						
2.5	0.0640	0.174	70						
3.8	0.0541	0.184	48						

COMPOUND: α -Endosulfan

STRUCTURE:

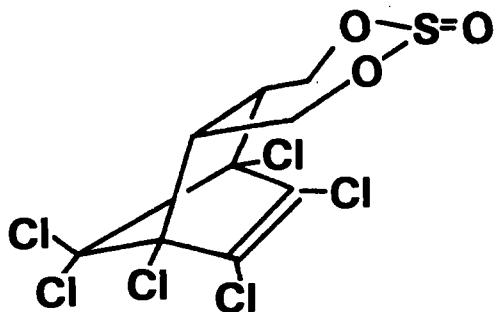

FORMULA: $C_9H_{16}Cl_6SO_3$ MOL. WT. 406.93

FREUNDLICH PARAMETERS	pH		
	5.3		
K	194		
1/n	0.50		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	194		
0.1	61		
0.01	19		
0.001	6.1		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	15	50	160
0.1		4.6	16
0.01			1.4


C_o , mg/l	
1.0	5.2
0.1	1.6
0.01	0.5

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent extraction - G.C.

REMARKS: Data were obtained on a mixture containing 62% alpha and 38% beta isomers.


COMPOUND: α -Endosulfan

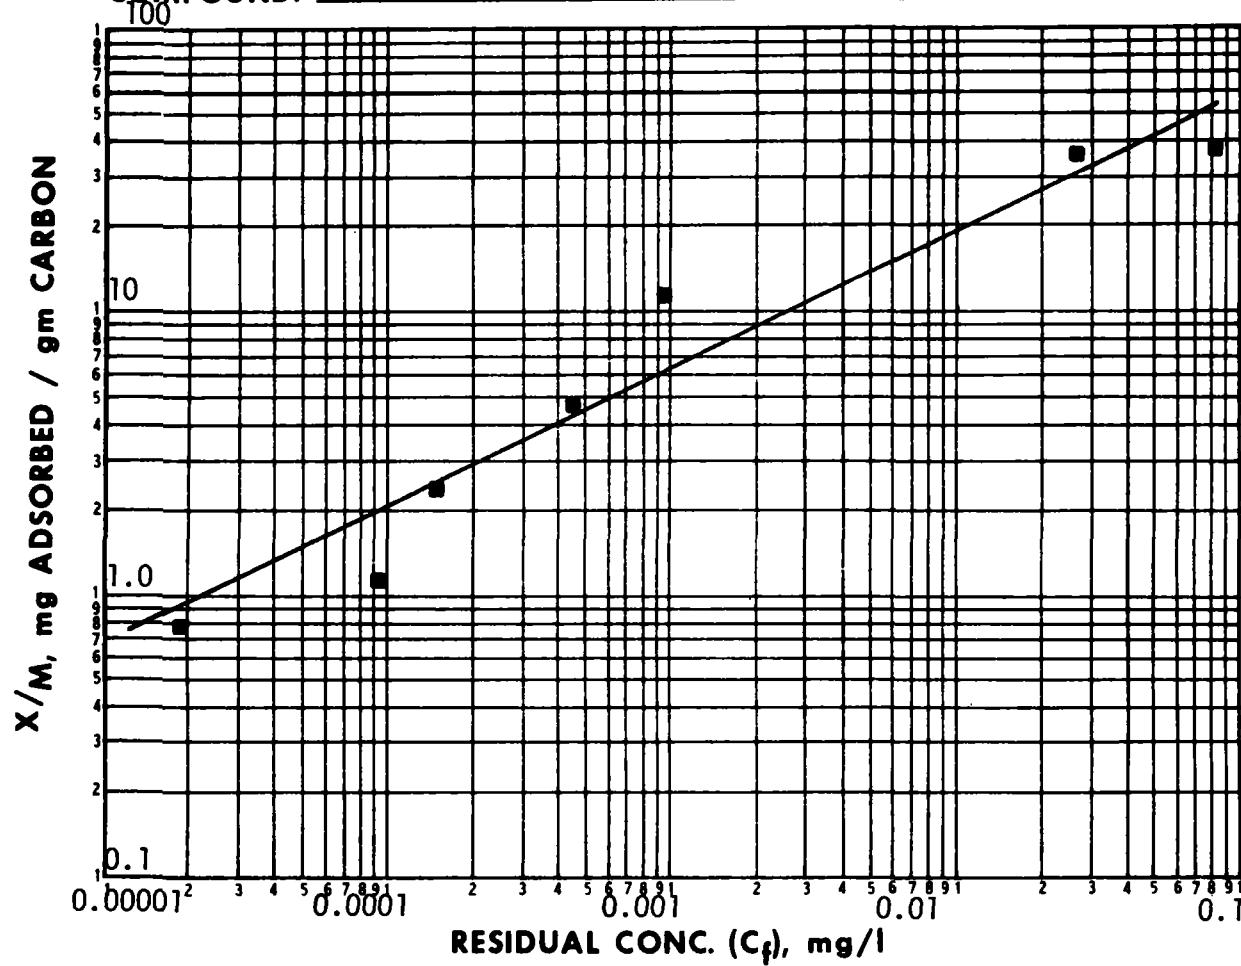

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.119								
1.0	0.081	0.038	38.0						
2.5	0.026	0.093	37.2						
10	0.001	0.118	11.8						
25	0.0005	0.118	4.74						
50	0.0002	0.119	2.38						
100	0.0001	0.119	1.19						
150	0.00002	0.119	0.79						
200	0.000008	0.119	0.59						

COMPOUND: β -Endosulfan

STRUCTURE:

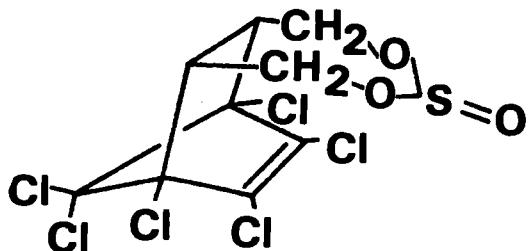

FORMULA: $C_9H_6Cl_6S_0_3$ MOL. WT. 406.93

FREUNDLICH PARAMETERS	pH		
	5.3		
K	615		
1/n	0.83		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	615		
0.1	92		
0.01	14		
0.001	2.0		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

C_f , mg/l

GRANULAR CARBON COLUMN

C_o , mg/l	0.1	0.01	0.001
1.0	10	74	500
0.1		6.7	50
0.01			4.5


C_o , mg/l	
1.0	1.6
0.1	1.1
0.01	0.7

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent extraction - G.C.

REMARKS: Data were obtained on a mixture containing 62% alpha and 38% beta isomers.


COMPOUND: β -Endosulfan

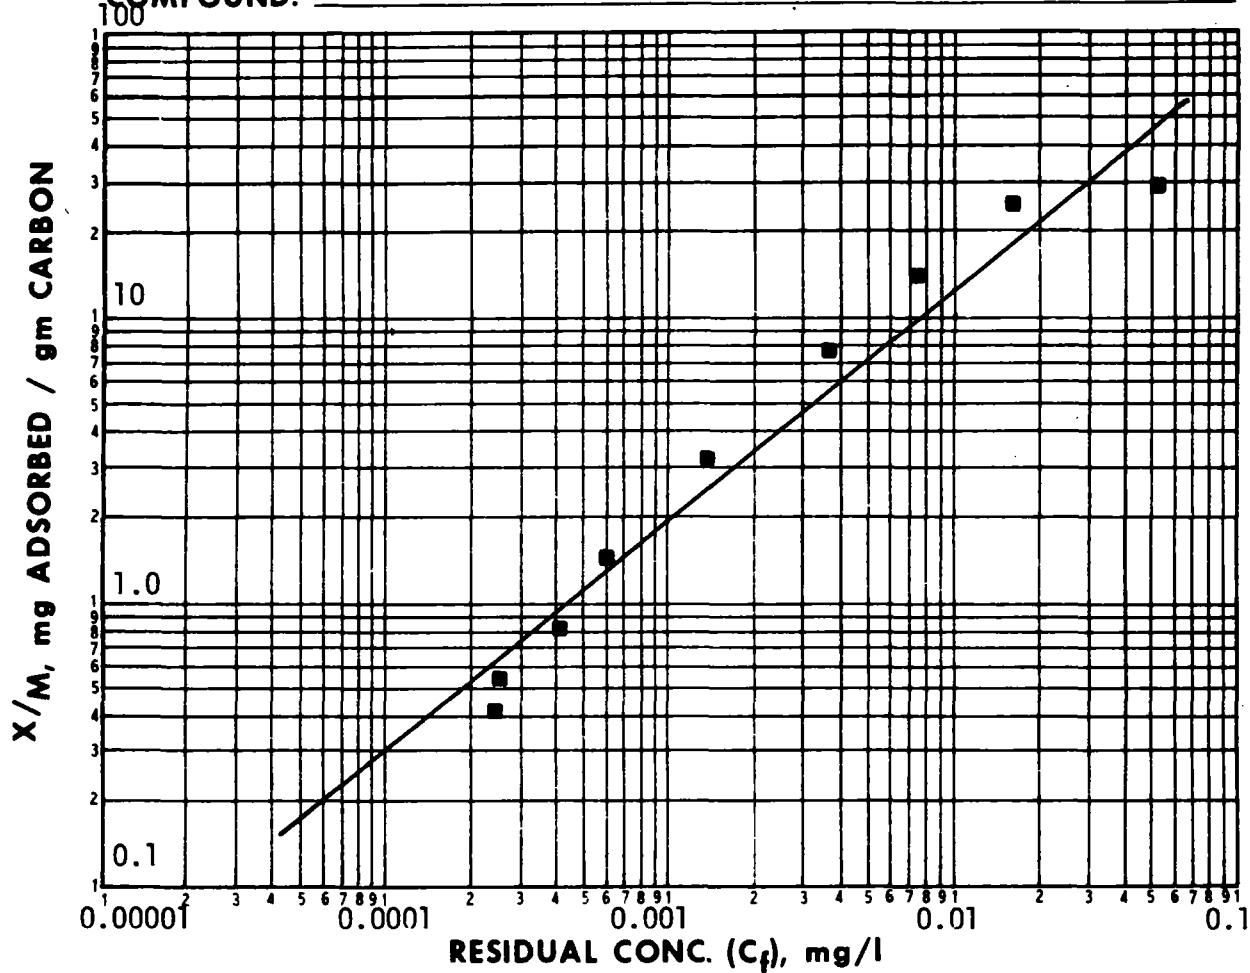

CARBON DOSE mg/l	$\bullet \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.082								
1.0	0.052	0.030	30.0						
2.5	0.017	0.065	26.0						
5	0.008	0.074	14.8						
10	0.004	0.078	7.80						
25	0.001	0.081	3.24						
50	0.0006	0.081	1.62						
100	0.0004	0.082	0.82						
150	0.0003	0.082	0.54						
200	0.0002	0.082	0.41						

COMPOUND: Endosulfan sulfate

STRUCTURE:

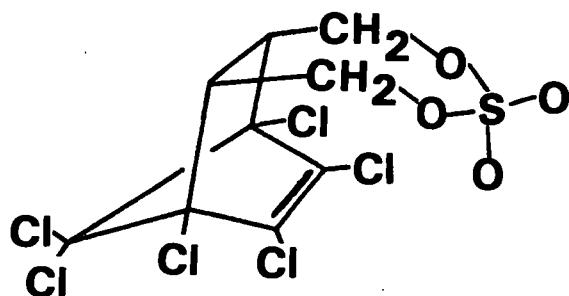

FORMULA: C₉H₆Cl₆SO₄ **MOL. WT.** 422.93

FREUNDLICH PARAMETERS	pH		
	5.3		
K	686		
1/n	0.81		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	686		
0.1	105		
0.01	16		
0.001	2.5		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	8.5	60	390
0.1		5.5	39
0.01			3.5


GRANULAR CARBON COLUMN

C ₀ , mg/l	
1.0	1.5
0.1	1.0
0.01	0.6

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent extraction - G.C.


REMARKS:

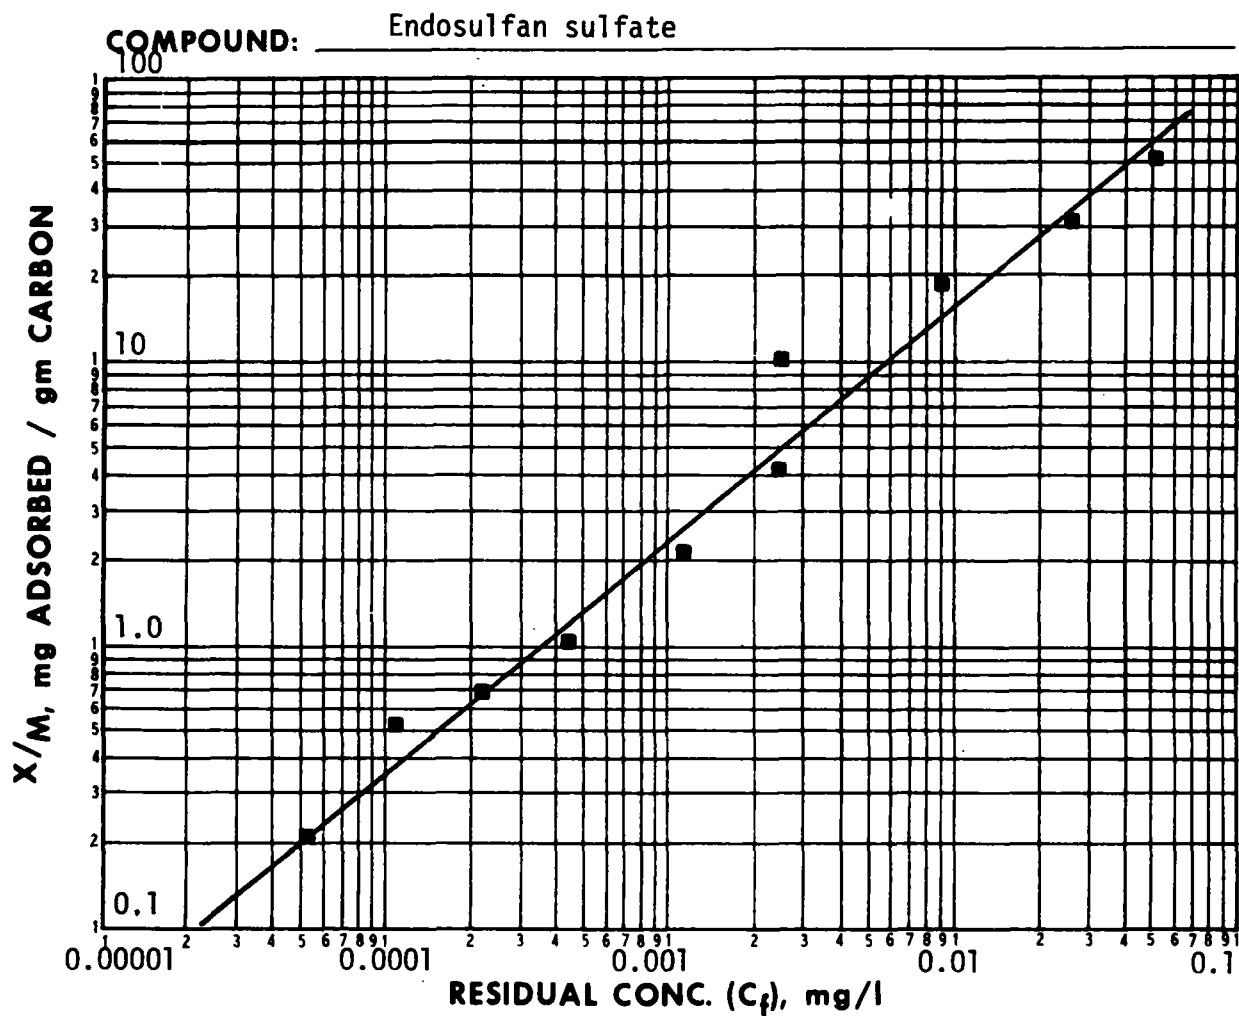

CARBON DOSE mg/l	■ pH= 5.3			pH=			pH=		
	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0	0.105								
1.0	0.054	0.051	51.0						
2.5	0.027	0.078	31.2						
5	0.0090	0.096	19.2						
10	0.0026	0.102	10.2						
25	0.0023	0.103	4.10						
50	0.0012	0.104	2.07						
100	0.0004	0.105	1.05						
150	0.0002	0.105	0.70						
200	0.0001	0.105	0.52						
500	0.00005	0.105	0.21						
1000	0.00003	0.105	0.10						

COMPOUND: Endrin

STRUCTURE:



FORMULA: $C_{12}H_8Cl_6O$ MOL. WT. 381.0

FREUNDLICH PARAMETERS	pH		
	5.3		
K	666		
1/n	0.80		
Corr. Coef. r	0.95		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	666		
0.1	106		
0.01	17		
0.001	2.7		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

C_f , mg/l

GRANULAR CARBON COLUMN

C_o , mg/l	0.1	0.01	0.001
1.0	8.5	60	380
0.1		5.4	37
0.01			3.4


C_o , mg/l
1.0
0.1
0.01

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent extraction - G.C.

REMARKS:


COMPOUND: Endrin

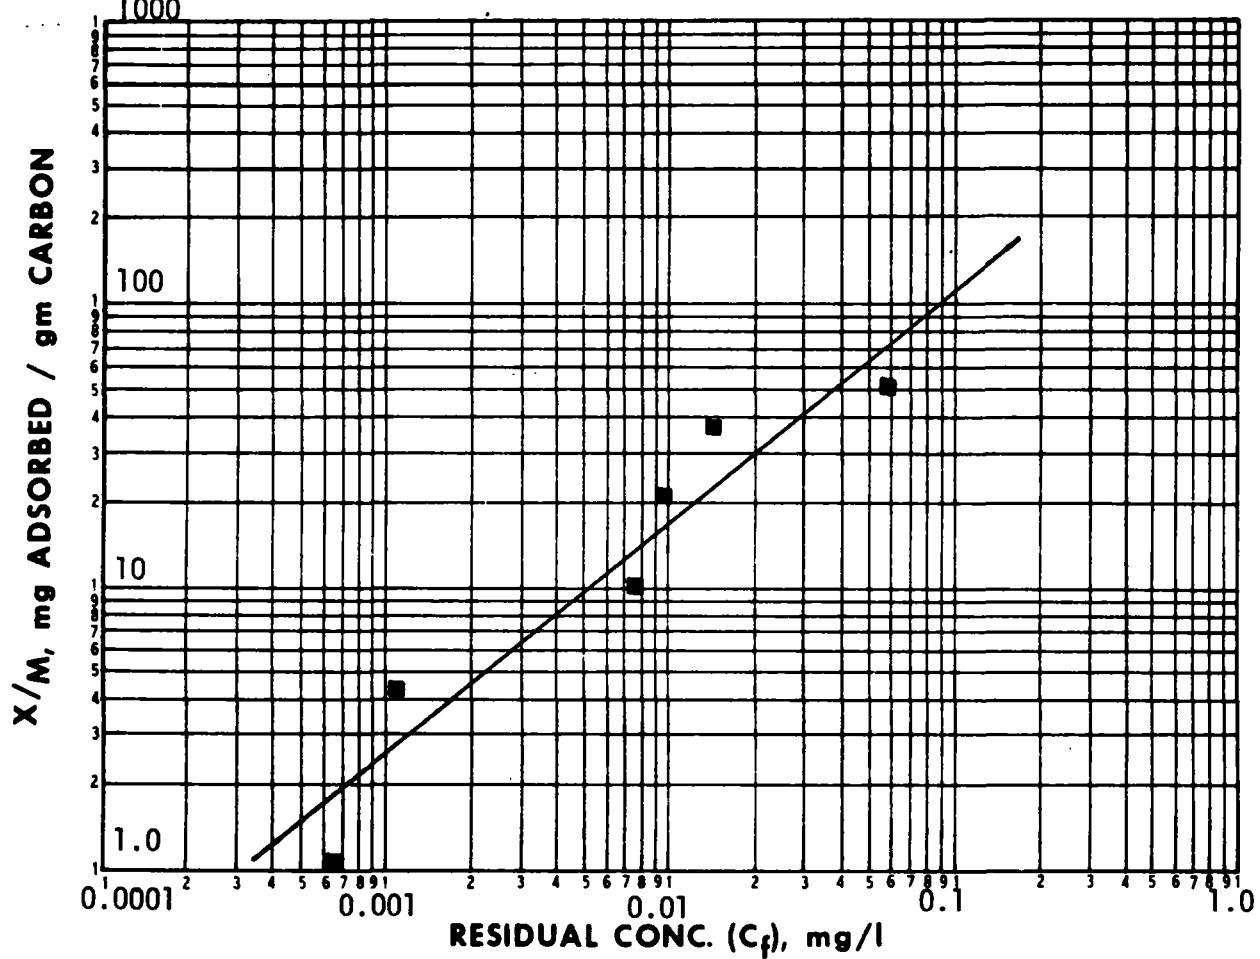

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.110								
1.0	0.059	0.051	51.0						
2.5	0.015	0.095	38.0						
5	0.010	0.100	20.0						
10	0.008	0.102	10.2						
25	0.001	0.109	4.36						
100	0.0006	0.109	1.09						

COMPOUND: Ethanol

STRUCTURE:



FORMULA: $\text{C}_2\text{H}_6\text{O}$ MOL. WT. 46.07

FREUNDLICH PARAMETERS	pH		
	5.3		
K			
1/n			
Corr. Coef. r			
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

C_f , mg/l

GRANULAR CARBON COLUMN

C_o , mg/l			


C_o , mg/l	

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS: Not adsorbed


COMPOUND: Ethanol

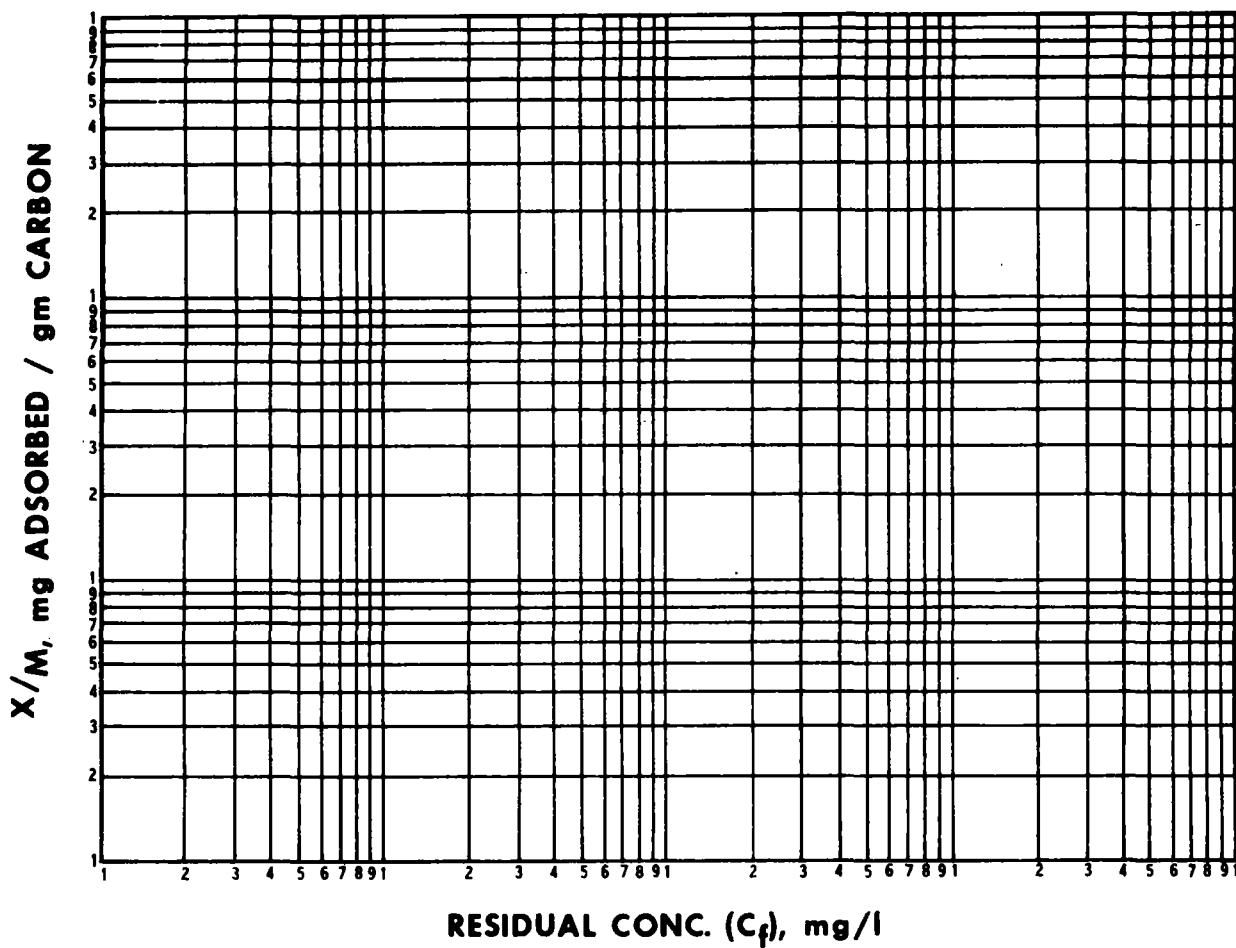

CARBON DOSE mg/l	pH= 5.3			pH=			pH=		
	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0	66.8								
190	63.9	2.90	15.2						
480	62.7	4.10	8.54						
954	63.1	3.70	3.88						
1520	65.4	1.40	0.92						
4800	62.7	4.10	0.85						
9600	62.4	4.40	0.46						

COMPOUND: Ethylbenzene

STRUCTURE:



FORMULA: C₈H₁₀

MOL. WT. 106.16

FREUNDLICH PARAMETERS	pH		
	7.4		
K	53		
1/n	0.79		
Corr. Coef. r	0.96		

INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	325		
1.0	53		
0.1	8.5		
0.01	1.4		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l


C ₀ , mg/l	0.1	0.01	0.001
1.0	110	710	4,400
0.1		65	440
0.01			40

C ₀ , mg/l	
1.0	19
0.1	12
0.01	7.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 260 nm


REMARKS:

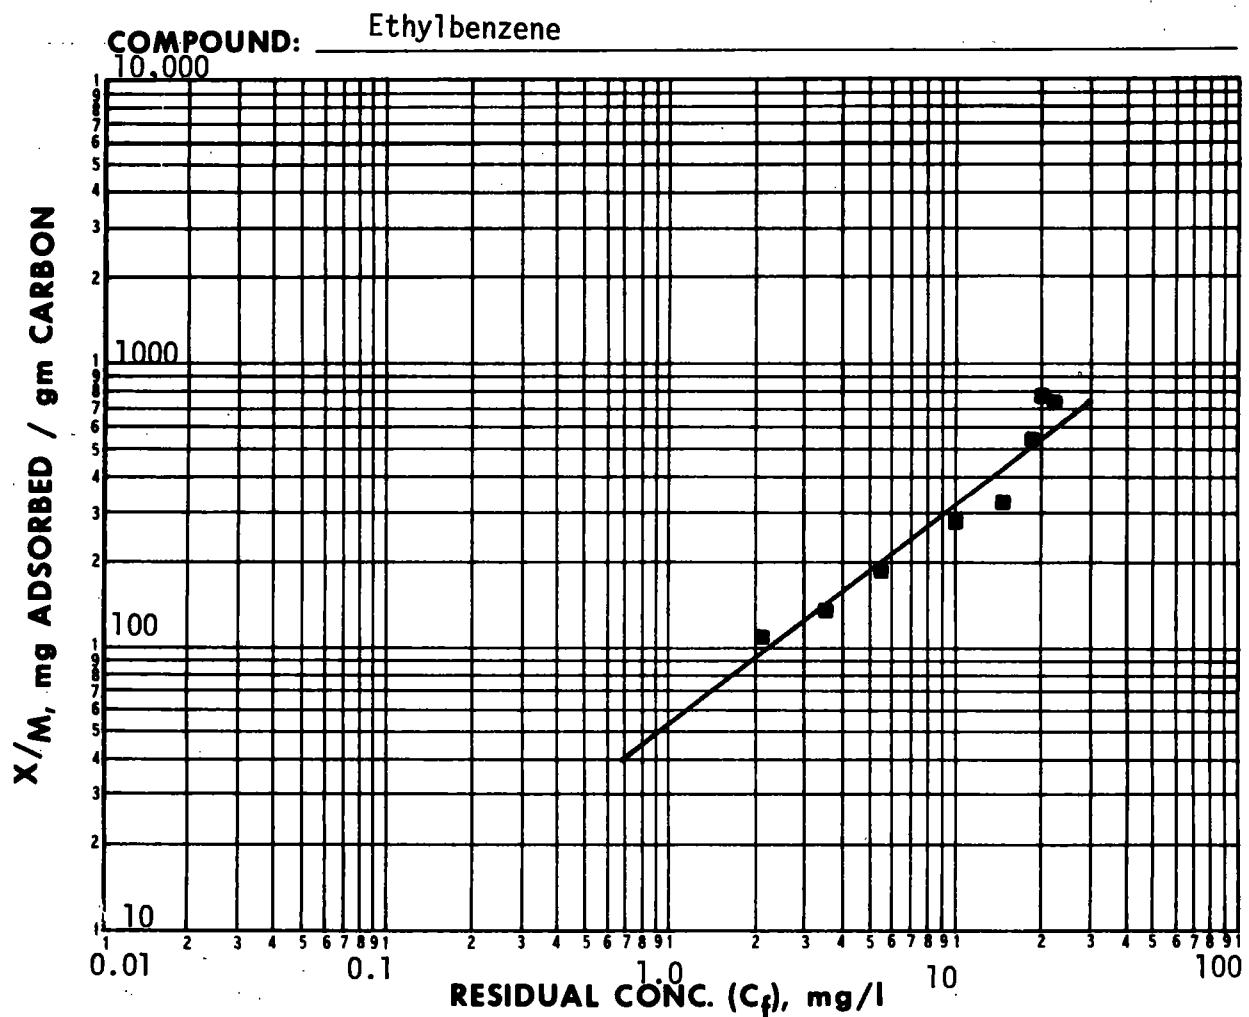

CARBON DOSE mg/l	\bullet pH = 7.3			\bullet pH =			\bullet pH =		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	24.3								
2.5	22.5	1.80	720						
5	20.4	3.90	780						
10	18.9	5.40	540						
25	16.2	8.10	324						
50	10.2	14.10	282						
100	5.4	18.90	189						
150	3.6	20.70	138						
200	2.1	22.20	111						

COMPOUND: Ethylenediamine

STRUCTURE:



FORMULA: $\text{C}_2\text{H}_8\text{N}_2$

MOL. WT. 60.10

FREUNDLICH PARAMETERS	pH		
K			
1/n			
Corr. Coef. r			
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l			


C_o , mg/l	

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS: Not adsorbed


COMPOUND: Ethylenediamine

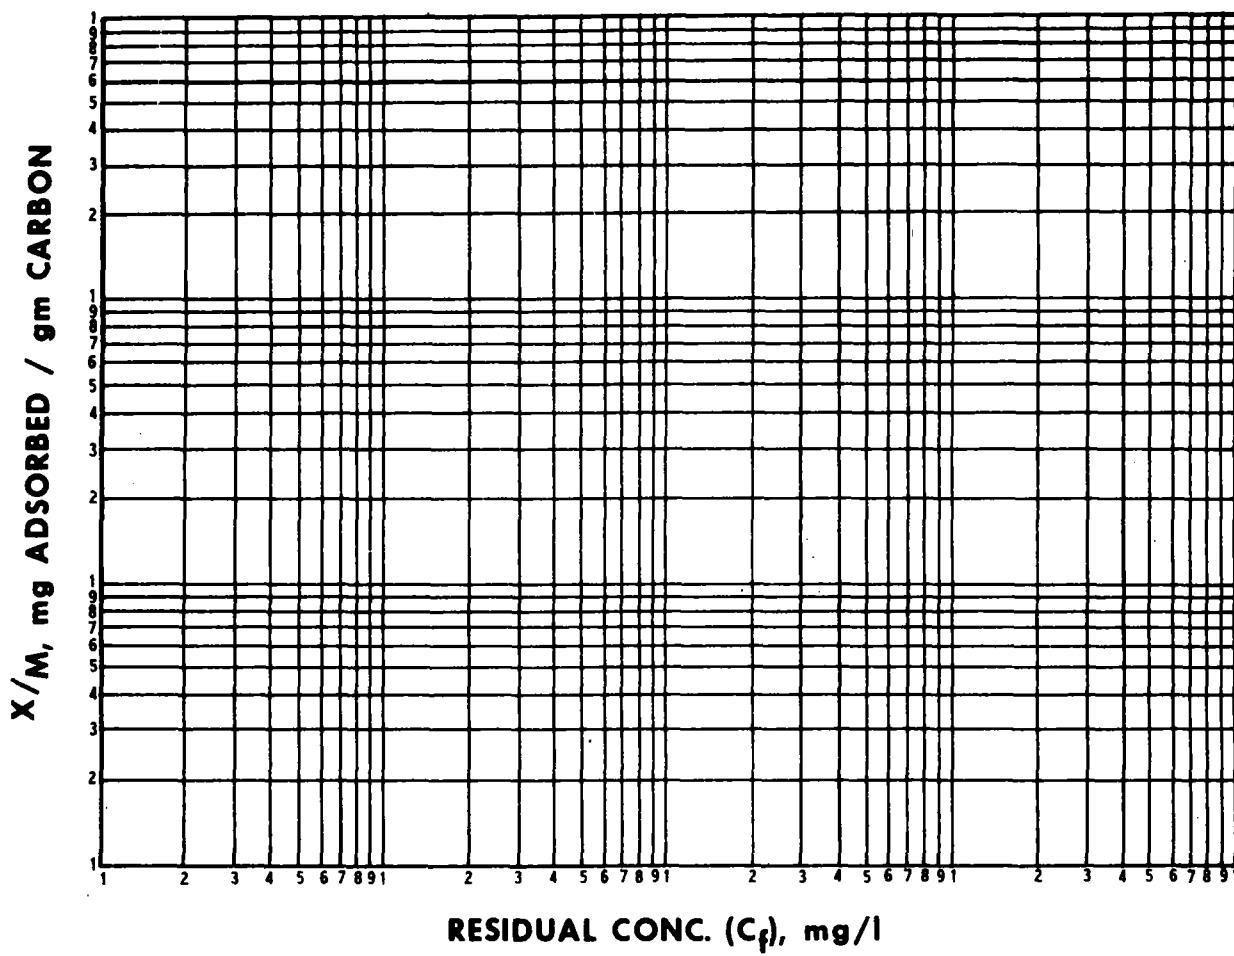

CARBON DOSE mg/l	pH=			pH=			pH=		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	26.5			25.5			24.5		
5	25.0			24.5			23.5		
10	24.5			25.5			23.5		
25	24.5			25.0			23.0		
50	24.0			24.5			25.0		
100	25.0			23.0			22.0		
150	23.5			24.0			25.5		
200	24.0			22.0			26.0		

COMPOUND: Ethylenediaminetetraacetic acid (EDTA)

STRUCTURE:

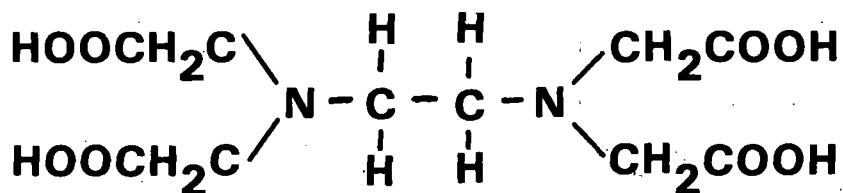

FORMULA: $\text{C}_{10}\text{H}_{16}\text{N}_2\text{O}_8$

MOL. WT. 292.3

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	0.86		
1/n	1.5		
Corr. Coef. r	0.92		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	30		
1.0	0.86		
0.1	0.25		
0.01	0.0007		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	36,000	>100,000	>100,000
0.1		>100,000	>100,000
0.01			>100,000


C_o , mg/l	
1.0	1,160
0.1	3,970
0.01	13,600

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS:


COMPOUND: Ethylenediaminetetraacetic acid (EDTA)

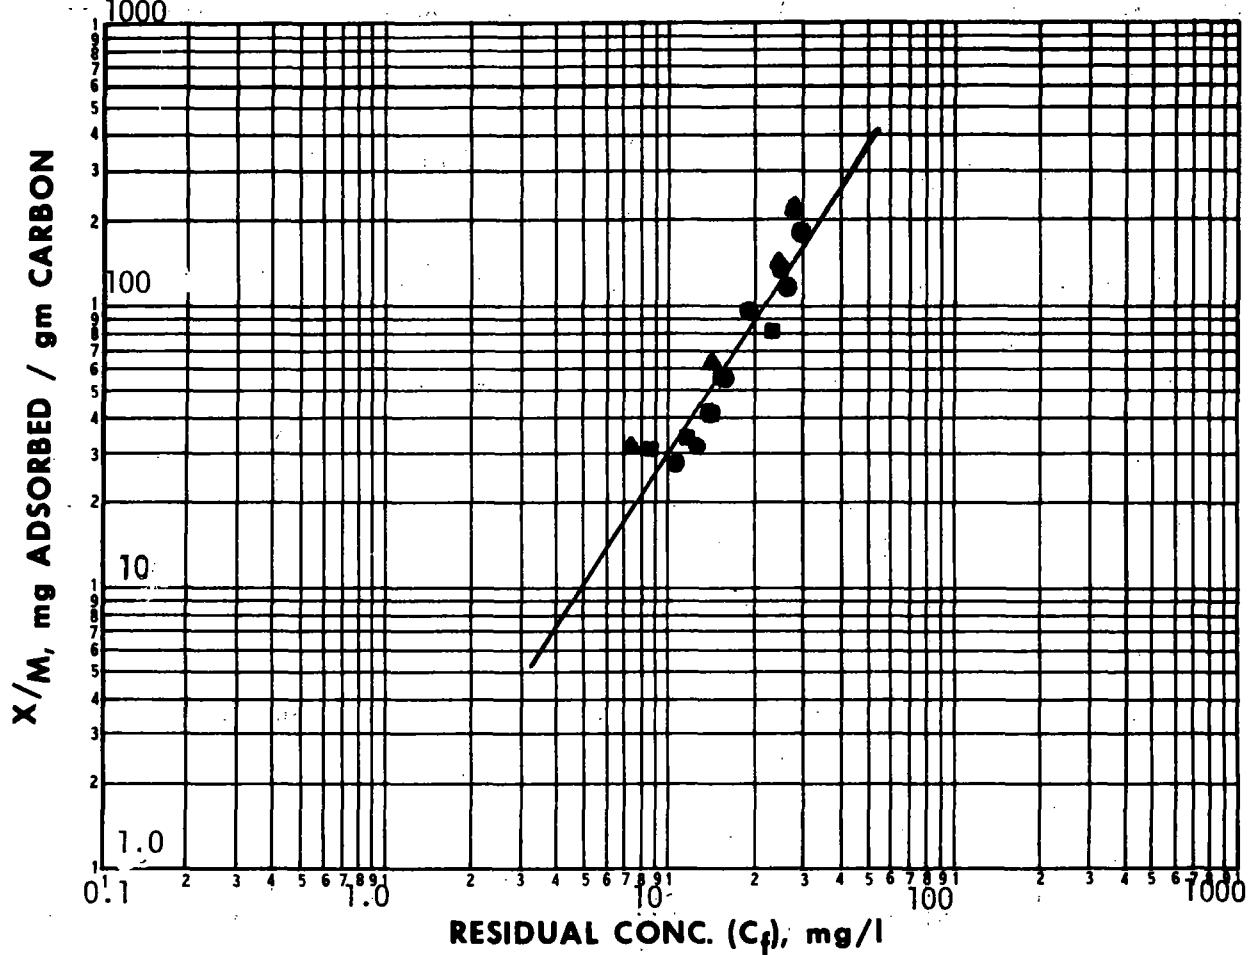

CARBON DOSE mg/l	$\bullet \text{ pH} = 3.0$			$\bullet \text{ pH} = 7.0$			$\bullet \text{ pH} = 9.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	39.2			39.2			39.2		
50	30.0	9.2	184				28.2	11.0	220
100	26.8	12.4	124	25.1	14.1	141	24.3	14.9	149
200	19.5	19.7	98.5	23.1	16.1	80.5			
400	17.0	22.2	55.5	17.0	22.2	55.5	14.6	24.6	61.5
600	14.6	24.6	41.0	15.1	24.1	40.2			
800	13.4	25.8	32.3	11.7	27.5	34.4			
1000	11.4	27.8	27.8	8.8	30.4	30.4	7.30	31.8	31.9

COMPOUND: bis(2-Ethylhexyl) phthalate

STRUCTURE:

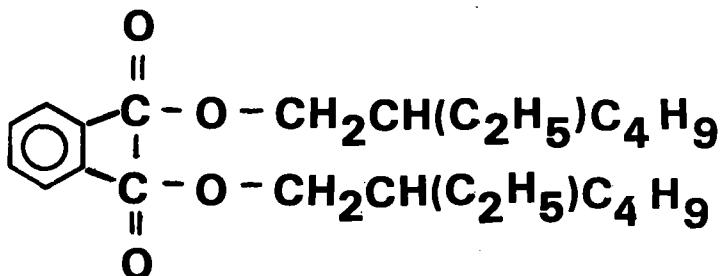

FORMULA: C₂₄H₃₈O₄

MOL. WT. 390.56

FREUNDLICH PARAMETERS	pH		
	5.3		
K	11,300		
1/n	1.5		
Corr. Coef. r	0.91		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	11,300		
0.1	340		
0.01	10		
0.001	0.32		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	2.5	88	2,800
0.1		8.0	280
0.01			25


C ₀ , mg/l	
1.0	0.1
0.1	0.3
0.01	1.0

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS:


COMPOUND: bis (2-Ethylhexyl) phthalate

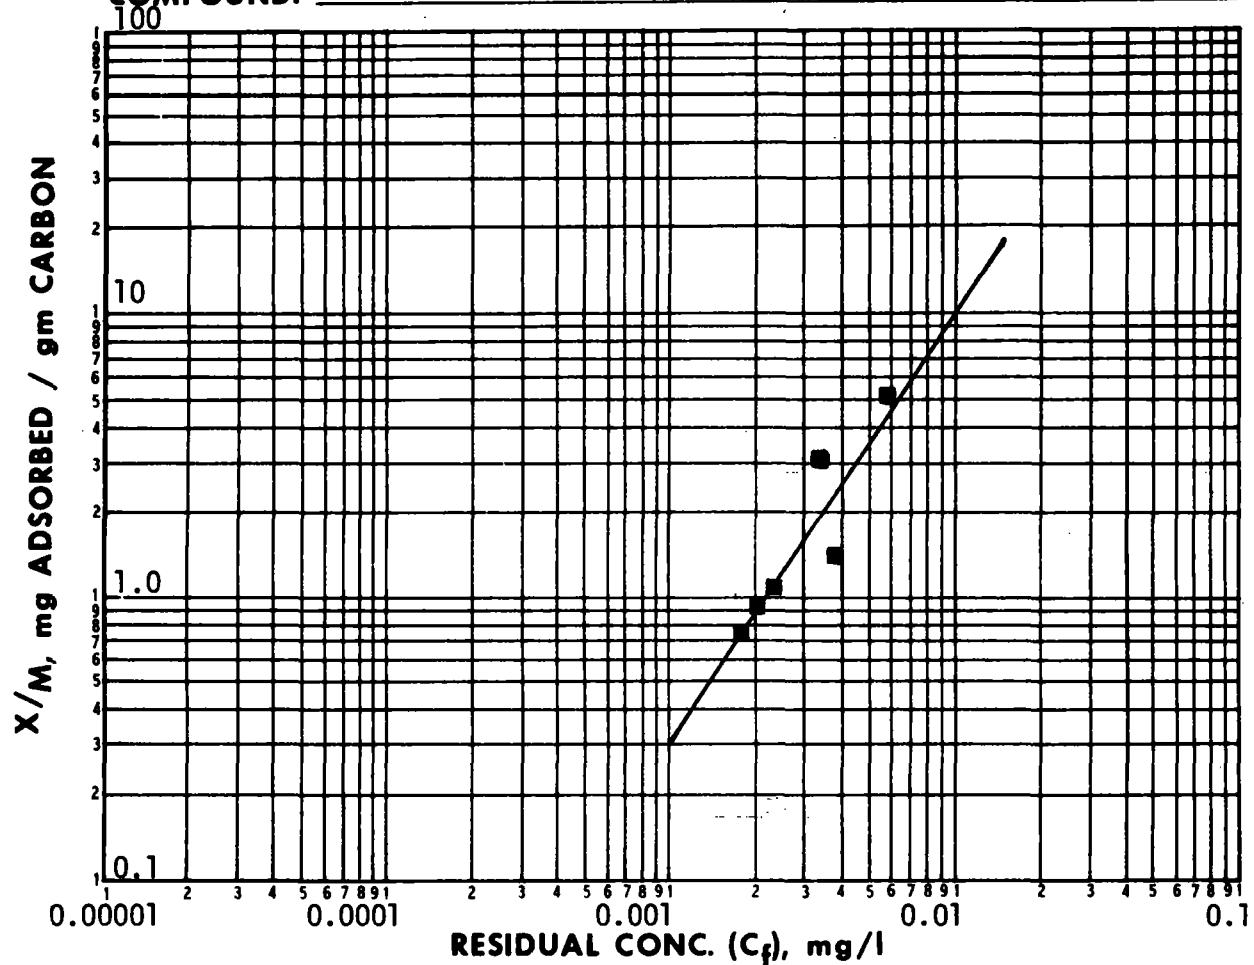

	■ pH = 5.3			pH =			pH =		
CARBON DOSE mg/l	C _f *	C ₀ -C _f =X	X/M	C _f	C ₀ -C _f =X	X/M	C _f	C ₀ -C _f =X	X/M
0	11.03								
1.0	5.94	5.09	5.09						
2.5	3.28	7.75	3.10						
5	3.80	7.23	1.45						
7.5	2.29	8.74	1.17						
10	2.00	9.03	0.903						
12.5	1.83	9.20	0.736						
* x 10 ³									

COMPOUND: Fluoranthene

STRUCTURE:



FORMULA: C₁₆H₁₀ **MOL. WT.** 202.26

FREUNDLICH PARAMETERS	pH		
	5.3		
K	664		
1/n	0.61		
Corr. Coef. r	0.88		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	664		
0.1	164		
0.01	41		
0.001	10		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l


C ₀ , mg/l	0.1	0.01	0.001
1.0	6.0	24	100
0.1		2.2	9.9
0.01			0.9

C ₀ , mg/l	
1.0	1.5
0.1	0.6
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS:

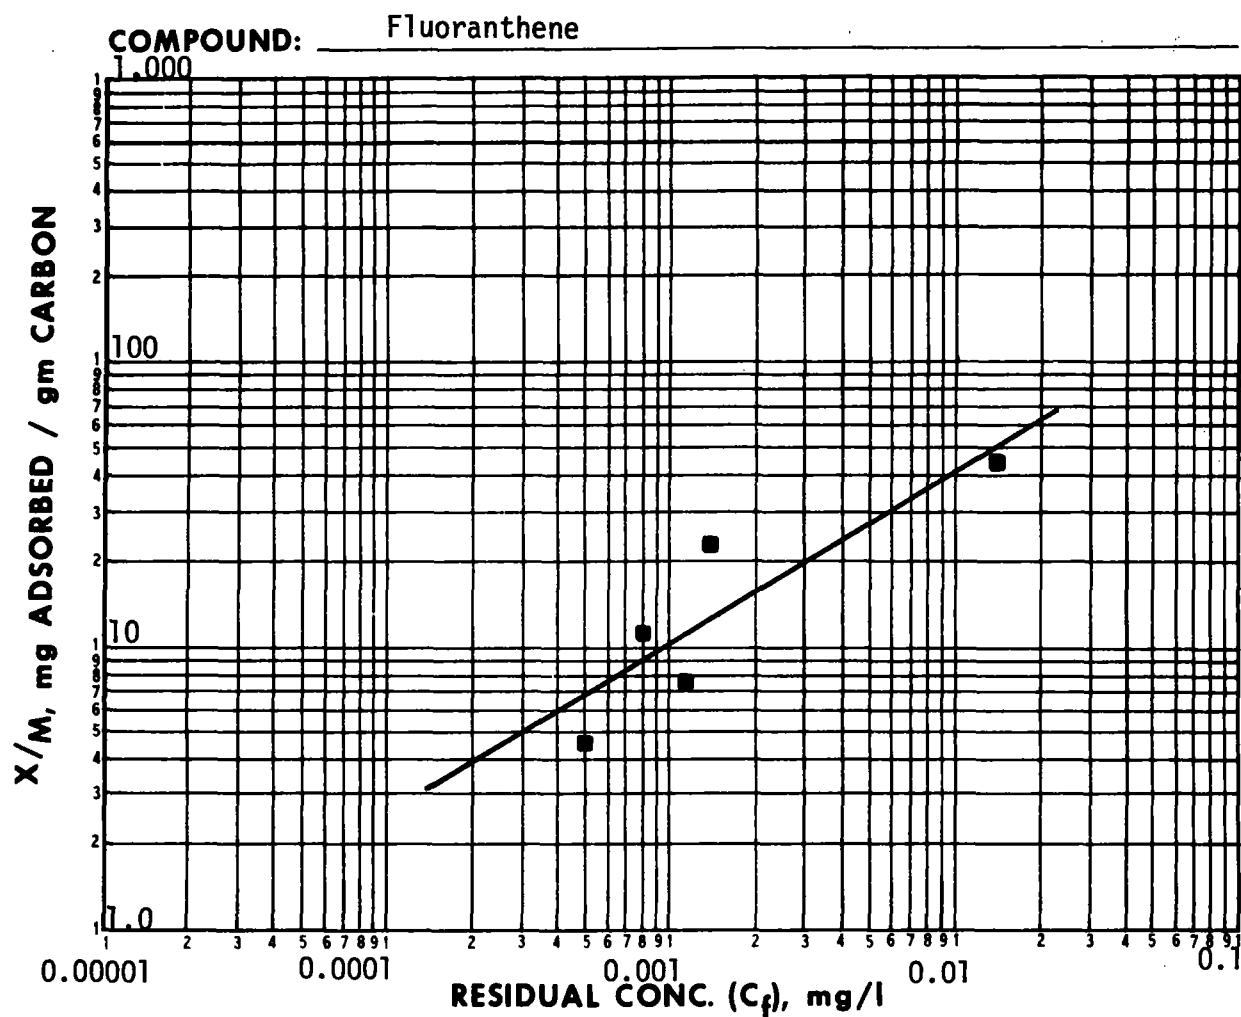

COMPOUND: Fluorene

STRUCTURE:



FORMULA: C₁₃H₁₀

MOL. WT. 166.22

FREUNDLICH PARAMETERS	pH		
	5.3		
K	330		
1/n	0.28		
Corr. Coef. r	0.94		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	330		
0.1	170		
0.01	89		
0.001	46		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	5.3	11	22
0.1		1.0	2.1
0.01			0.2


GRANULAR CARBON COLUMN

C ₀ , mg/l	
1.0	3.0
0.1	0.6
0.01	0.1


(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS:

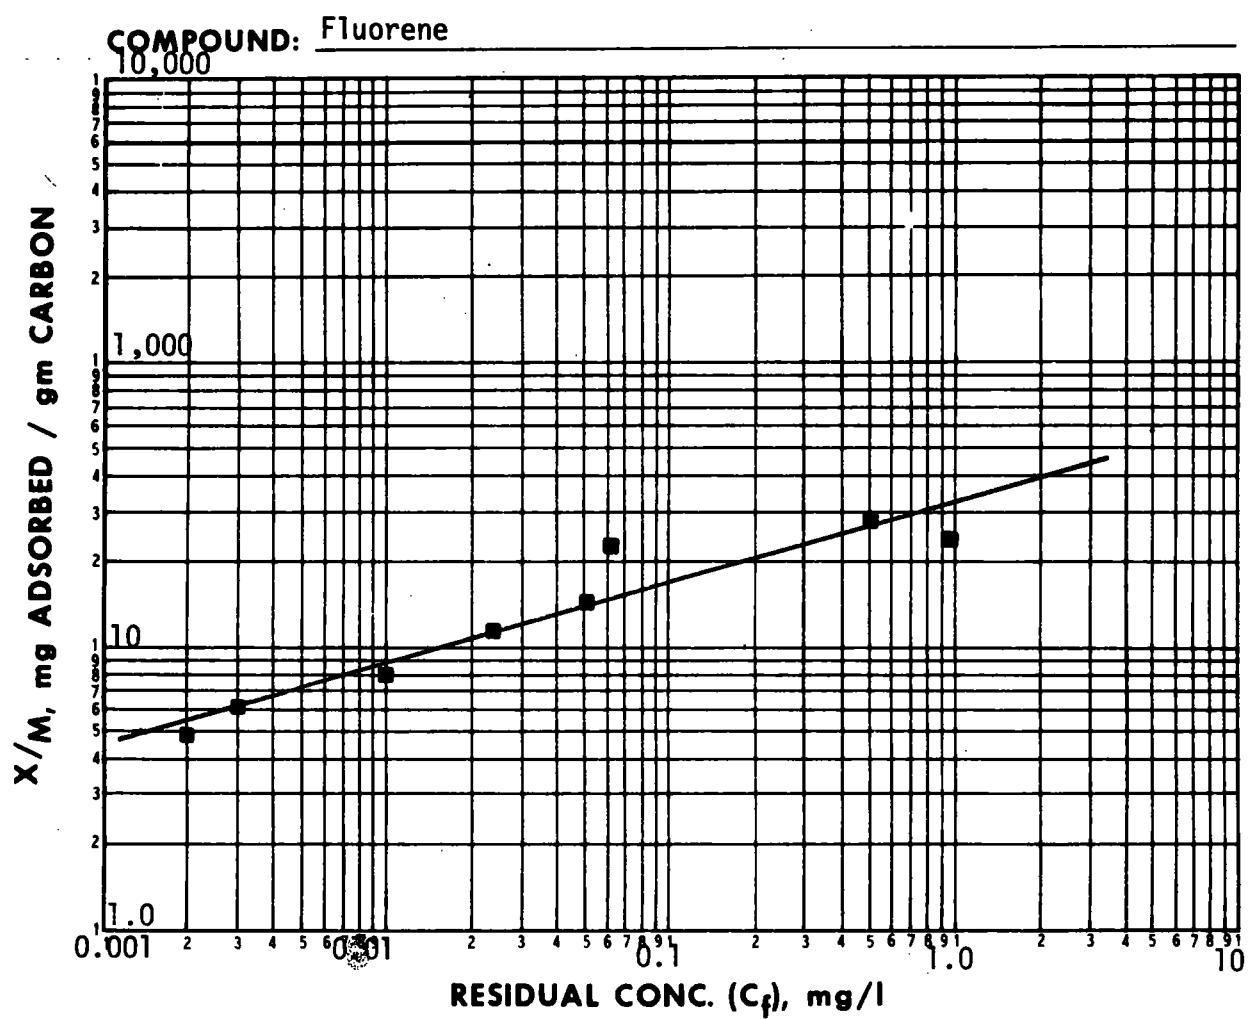

CARBON DOSE, mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.21								
1	0.972	0.238	238						
2.5	0.501	0.709	284						
5	0.061	1.149	230						
7.5	0.051	1.159	155						
10	0.023	1.187	119						
15	0.010	1.200	80.0						
20	0.003	1.207	60.4						
25	0.002	1.208	48.3						

COMPOUND: 5-Fluorouracil**STRUCTURE:** $C_4H_3N_2O_2F$

FORMULA: _____ MOL. WT. 130.08

FREUNDLICH PARAMETERS	pH	
	pH 3 and 7 pooled	9.0
K	5.5	1.3
1/n	1.0	1.4
Corr. Coef. r	0.87	0.79
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm	
10	59	34
1.0	5.5	1.3
0.1	0.50	0.05
0.01	0.047	0.002

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)****SINGLE STAGE POWDERED CARBON****GRANULAR CARBON COLUMN**C_f, mg/l


C ₀ , mg/l	0.1	0.01	0.001
1.0	1,800	21,000	>100,000
0.1		1,900	23,000
0.01			2,100

C ₀ , mg/l	
1.0	183
0.1	198
0.01	215

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 269 nm**REMARKS:**


COMPOUND: 5-Fluorouracil

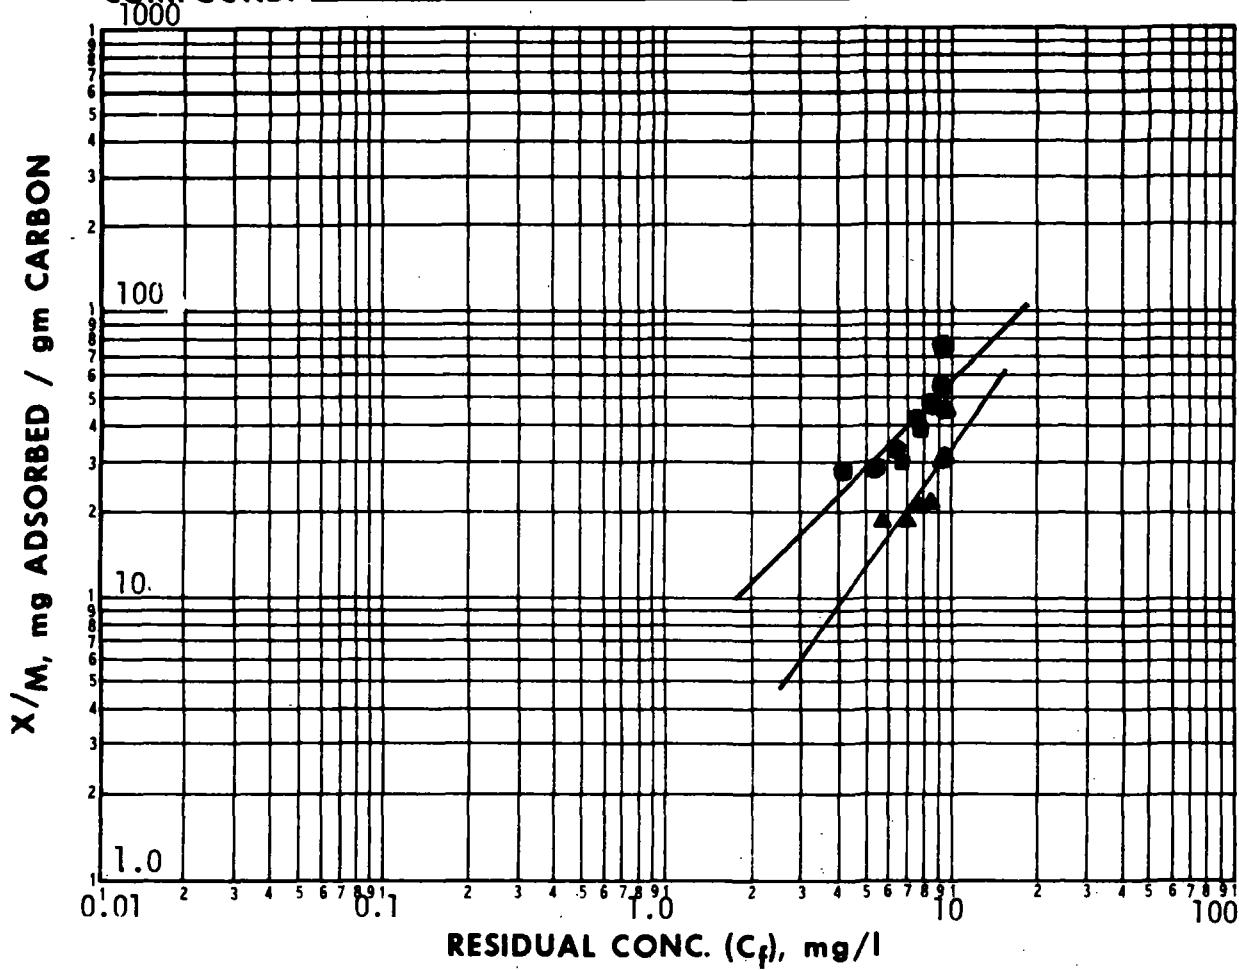

CARBON DOSE mg/l	● pH = 3.0			■ pH = 7.0			▲ pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	9.81			9.86			9.83		
5	9.43	0.38	76	9.48	0.38	76	9.60	0.23	46
10	9.26	0.55	55	9.33	0.53	53	9.52	0.31	31
25	8.59	1.22	49	8.66	1.20	48	9.07	0.76	30
50	7.76	2.05	41	7.93	1.93	39	8.71	1.12	22
100	6.47	3.34	33	6.84	3.02	30	7.76	2.07	21
150	5.39	4.42	29	5.47	4.39	29	6.98	2.85	19
200	4.09	5.72	28	4.13	5.73	28	5.84	3.99	19

COMPOUND: Guanine

STRUCTURE:



FORMULA: C₅H₅N₅O **MOL. WT.** 151.13

FREUNDLICH PARAMETERS	pH	
	3.0	pH 7 and 9 pooled
K	75	120
1/n	0.48	0.40
Corr. Coef. r	0.98	0.98
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm	
10	230	300
1.0	75	120
0.1	25	49
0.01	8.0	20

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	19	51	130
0.1		4.7	13
0.01			1.2


C ₀ , mg/l	
1.0	8.2
0.1	2.0
0.01	0.5

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 247 nm

REMARKS:


COMPOUND: Guanine

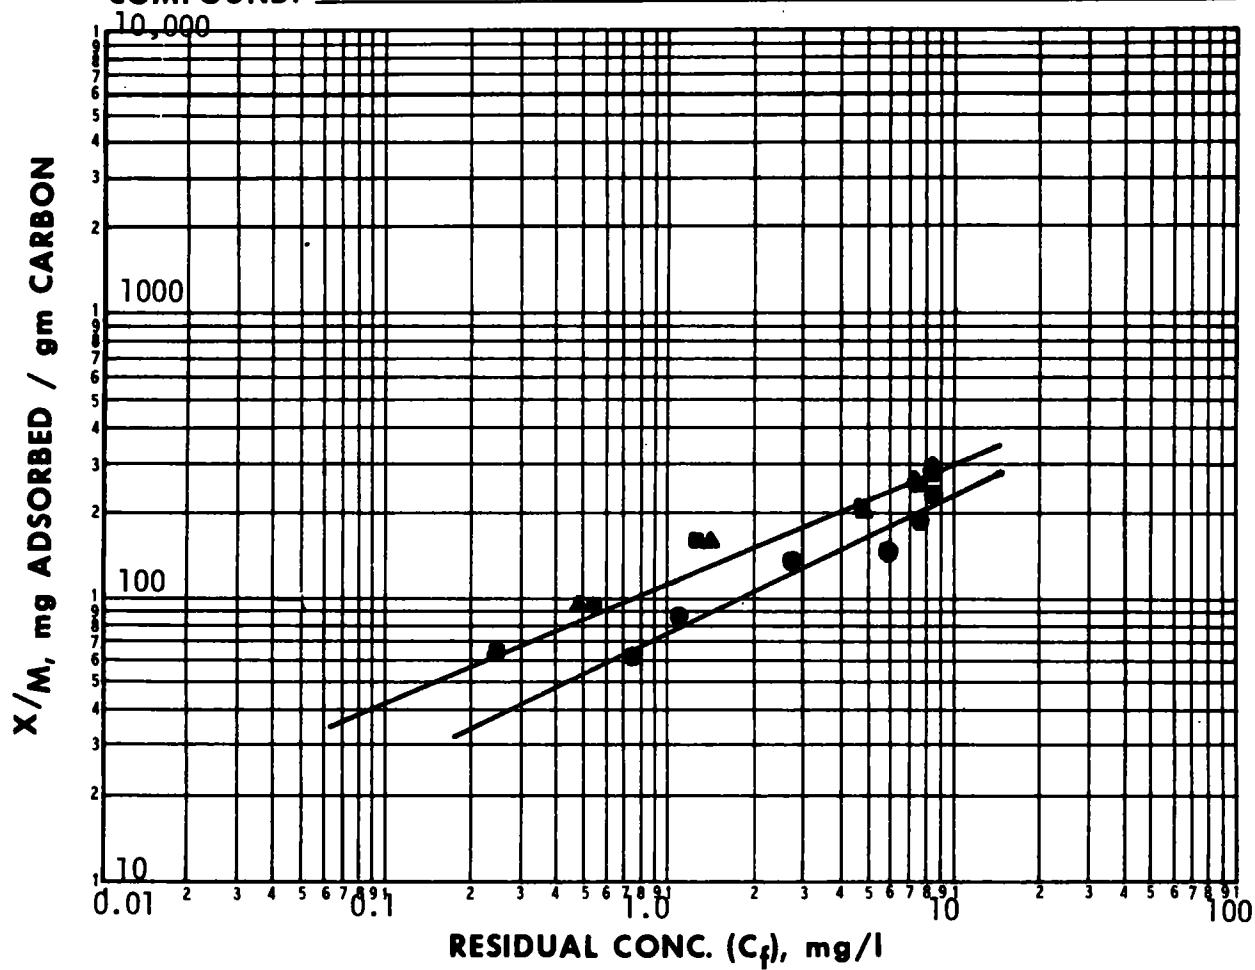

CARBON DOSE mg/l	● pH = 3.0			● pH = 7.0			● pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	9.87			9.92			9.88		
5	8.70	1.17	234	8.53	1.39	278	8.40	1.48	296
10	7.93	1.94	194	7.34	2.58	258	7.21	2.67	267
25	6.00	3.87	155	4.76	5.16	206	4.86	5.02	201
50	2.83	7.04	141	1.30	8.62	172	1.47	8.41	168
100	1.22	8.65	87	0.54	9.38	94	0.49	9.39	94
150	0.77	9.10	61	0.25	9.67	64	0.24	9.64	64

COMPOUND: Heptachlor

STRUCTURE:

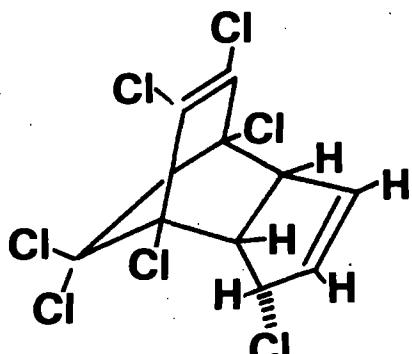

FORMULA: $C_{10}H_5Cl_7$

MOL. WT. 373.5

FREUNDLICH PARAMETERS	pH		
	5.3		
K	1220		
1/n	0.95		
Corr. Coef. r	0.78		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	1220		
0.1	140		
0.01	15		
0.001	1.7		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	6.6	64	580
0.1		5.9	57
0.01			5.2


C_o , mg/l	
1.0	0.8
0.1	0.7
0.01	0.7

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent extraction - G. C.

REMARKS:


COMPOUND: Heptachlor

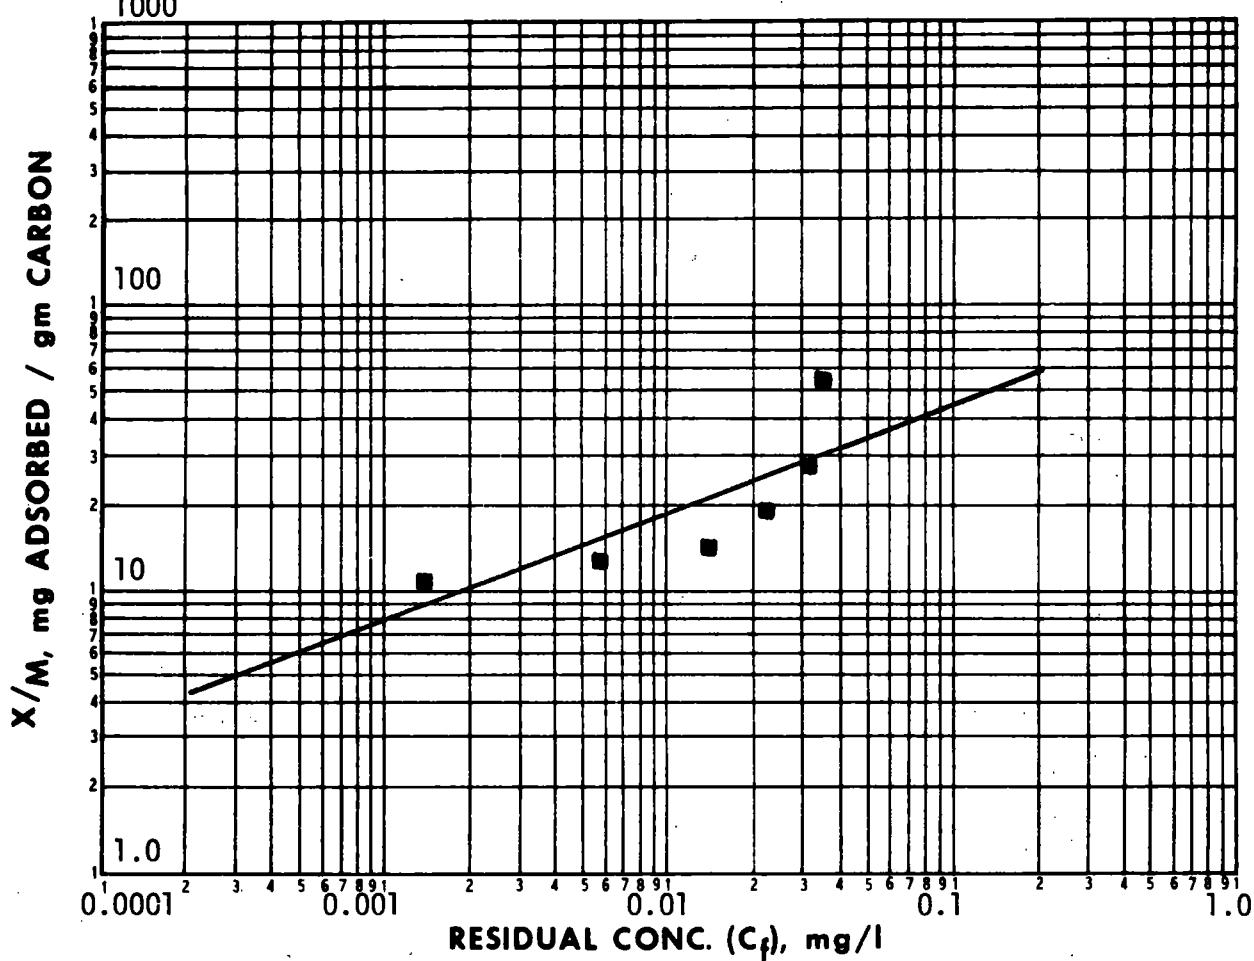

CARBON DOSE mg/l	$\bullet \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.169								
1.0	0.0368	0.1322	132						
2.5	0.0353	0.1337	53.5						
5	0.0311	0.1379	27.6						
7.5	0.0217	0.1473	19.6						
10	0.0137	0.1553	15.5						
12.5	0.0058	0.1632	13.1						

COMPOUND: Heptachlor epoxide

STRUCTURE:



FORMULA: $C_{10}H_5Cl_7O$ MOL. WT. 389.32

FREUNDLICH PARAMETERS	pH		
	5.3		
K	1038		
1/n	0.70		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	1038		
0.1	210		
0.01	41		
0.001	8.3		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	4.3	24	120
0.1		2.2	12
0.01			1.1

C_o , mg/l	
1.0	1.0
0.1	0.5
0.01	0.2


(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent extraction - G. C.

REMARKS:

Heptachlor epoxide


COMPOUND: _____

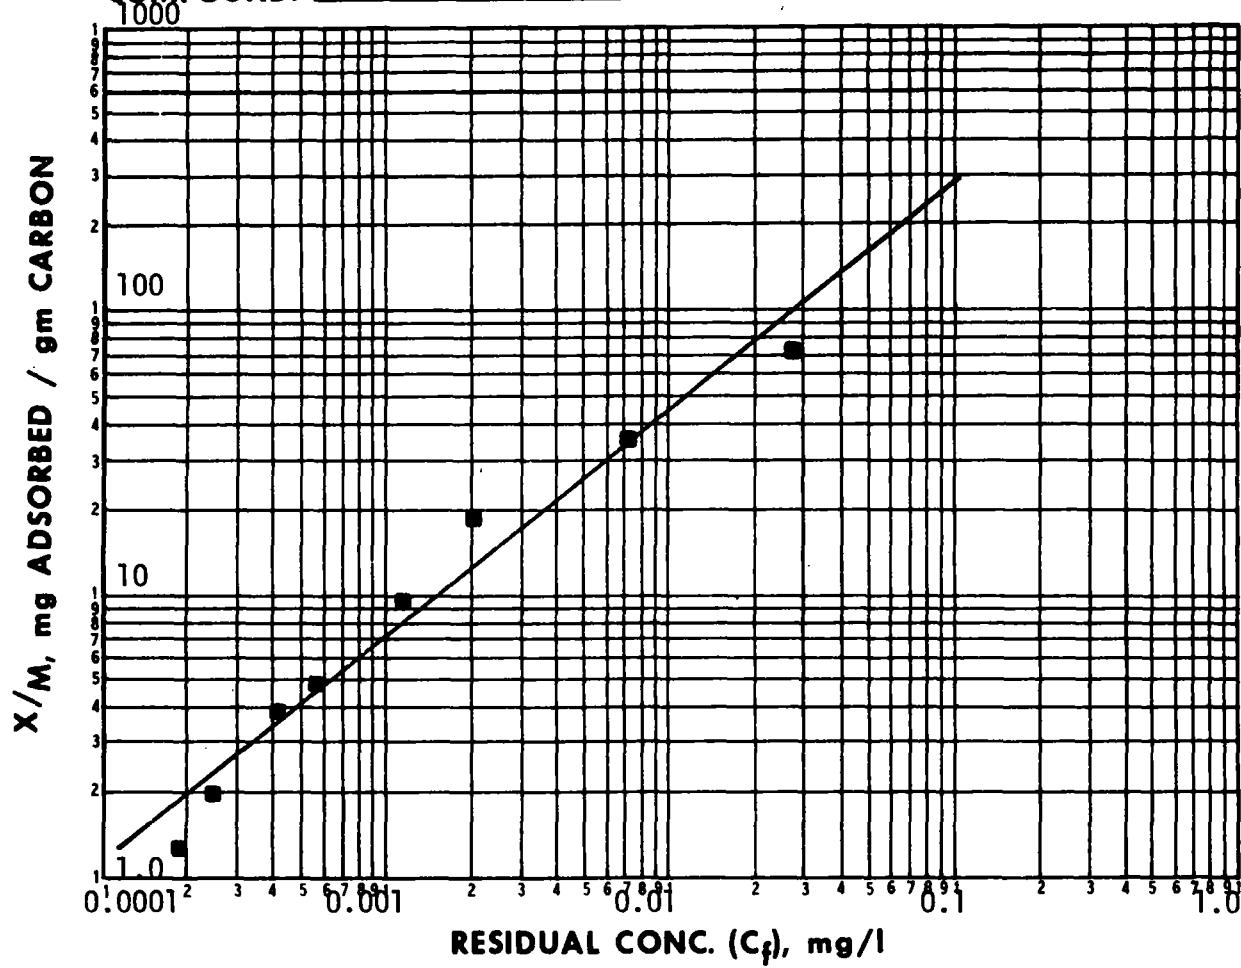

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.0985								
1.0	0.0279	0.0706	70.6						
2.5	0.00727	0.0912	36.5						
5	0.00204	0.0965	19.3						
10	0.00122	0.0973	9.73						
20	0.00057	0.0979	4.90						
25	0.00041	0.0981	3.92						

COMPOUND: Hexachlorobenzene

STRUCTURE:



FORMULA: C_6Cl_6

MOL. WT. 284.78

FREUNDLICH PARAMETERS	pH		
	5.3		
K	450		
1/n	0.60		
Corr. Coef. r	0.94		

INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	450		
0.1	110		
0.01	28		
0.001	7.1		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON C_f, mg/l

C _o , mg/l	0.1	0.01	0.001
1.0	8.0	35	140
0.1		3.2	14
0.01			1.3

GRANULAR CARBON COLUMN


C _o , mg/l	
1.0	2.2
0.1	1.0
0.01	0.4

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS:


COMPOUND: Hexachlorobenzene

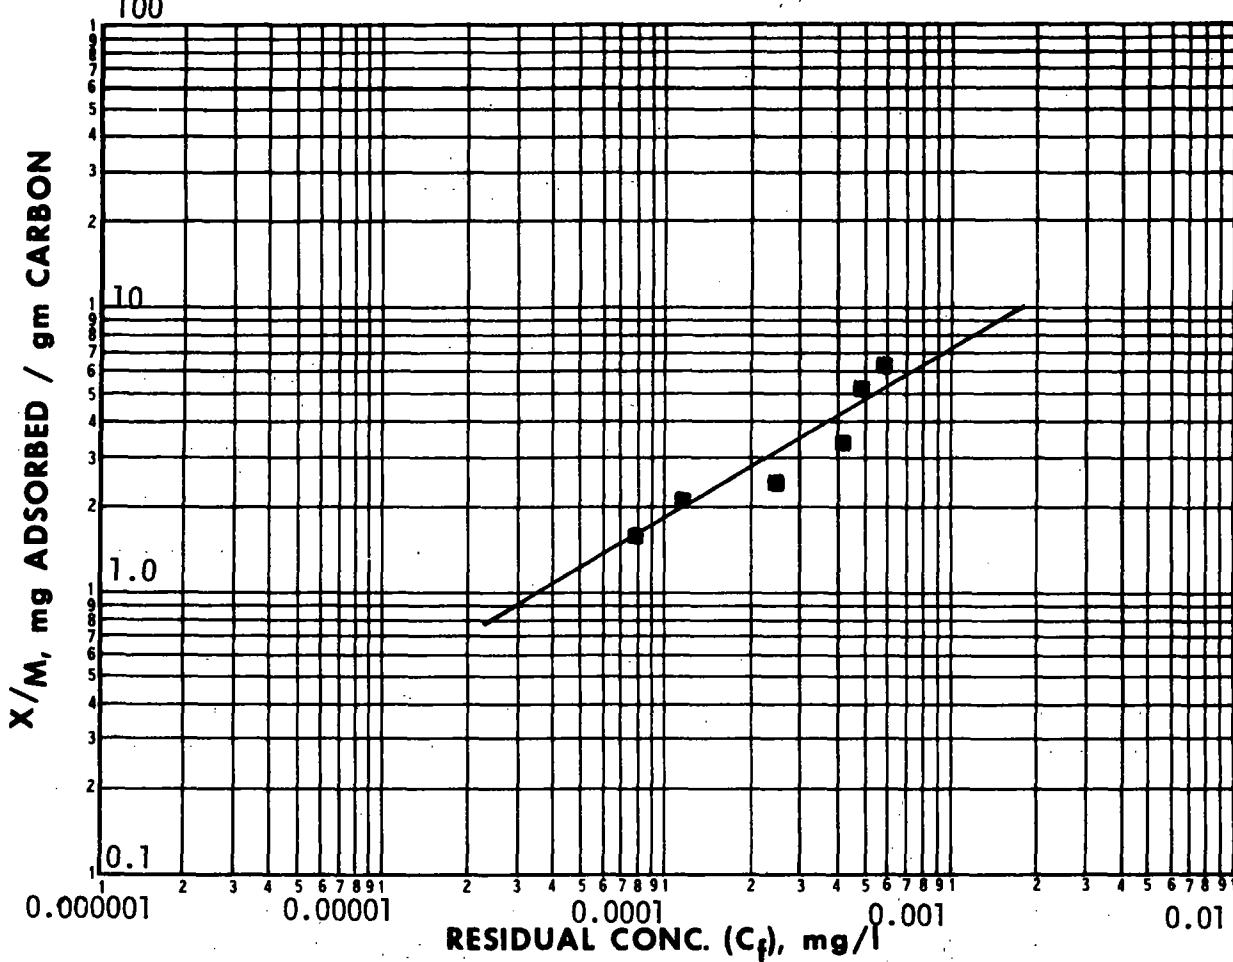

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$				$\text{pH} =$				$\text{pH} =$			
	C_f^*	$C_o - C_f = X^*$	X/M		C_f	$C_o - C_f = X$	X/M		C_f	$C_o - C_f = X$	X/M	
0	0.753											
0.025	0.597	0.156	6.24									
0.05	0.492	0.261	5.22									
0.1	0.409	0.344	3.44									
0.2	0.254	0.499	2.50									
0.3	0.120	0.633	2.11									
0.4	0.079	0.674	1.69									
$* \times 10^3$												

COMPOUND: Hexachlorobutadiene

STRUCTURE:

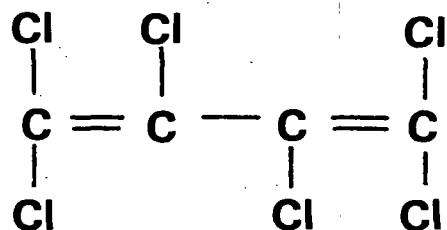

FORMULA: C_4Cl_6 **MOL. WT.** 260.76

FREUNDLICH PARAMETERS	pH		
K	258		
1/n	0.45		
Corr. Coef. r	1.00		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	258		
0.1	91		
0.01	32		
0.001	11		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	9.8	30	87
0.1		2.8	8.6
0.01			0.78

GRANULAR CARBON COLUMN


C_o , mg/l	
1.0	3.9
0.1	1.1
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:


COMPOUND: Hexachlorobutadiene

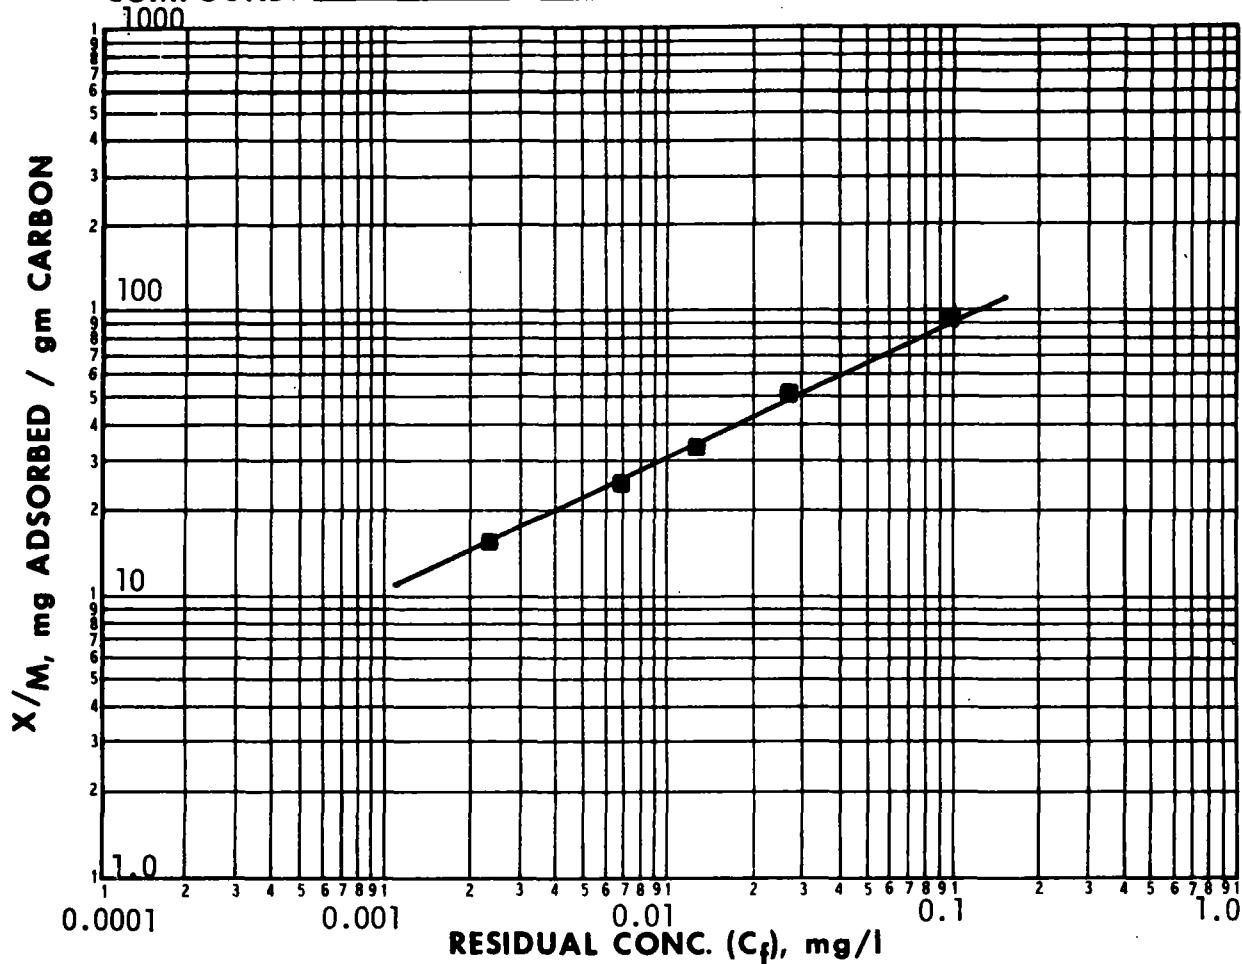

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M
0	1.000								
9.6	0.098	0.902	93.8						
19.2	0.027	0.973	50.6						
28.9	0.013	0.987	34.2						
38.5	0.007	0.993	25.8						
57.7	0.002	0.998	17.3						

COMPOUND: Hexachlorocyclopentadiene

STRUCTURE:

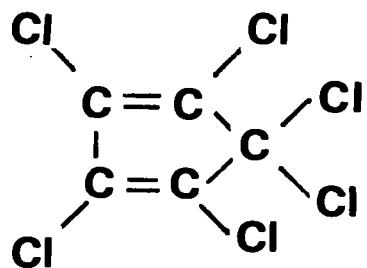

FORMULA: C₅C₁₆ **MOL. WT.** 272.77

FREUNDLICH PARAMETERS	pH		
	5.3		
K	370		
1/n	0.17		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	370		
0.1	250		
0.01	180		
0.001	112		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	3.6	5.9	8.9
0.1		0.54	0.88
0.01			0.08


C ₀ , mg/l	
1.0	2.7
0.1	0.40
0.01	0.06

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:


COMPOUND: Hexachlorocyclopentadiene

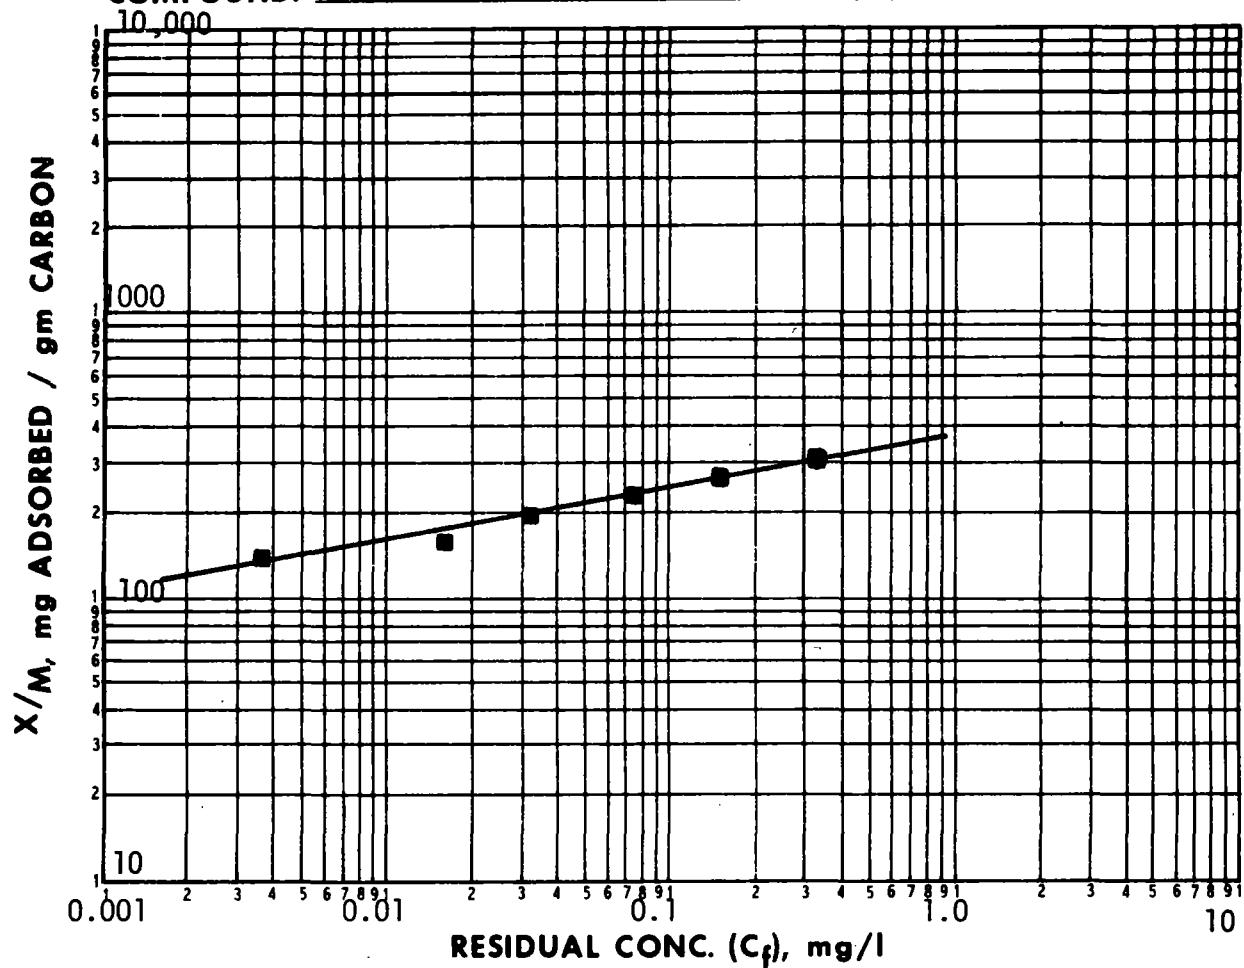

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.800								
1.54	0.327	0.473	307						
2.31	0.159	0.641	278						
3.08	0.074	0.726	236						
3.85	0.031	0.769	200						
4.62	0.017	0.783	170						
5.38	0.004	0.796	148						

COMPOUND: Hexachloroethane

STRUCTURE:



FORMULA: C_2Cl_6 **MOL. WT.** 236.74

FREUNDLICH PARAMETERS	pH		
	5.3		
K	96.5		
1/n	0.38		
Corr. Coef. r	0.93		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	97		
0.1	41		
0.01	17		
0.001	7.2		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**


SINGLE STAGE POWDERED CARBON			GRANULAR CARBON COLUMN	
C_o , mg/l	C_f , mg/l		C_o , mg/l	
C_o , mg/l	0.1	0.01	0.001	
1.0	20	60	140	
0.1		5.3	14	
0.01			1.3	

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G.C. Purge and Trap

REMARKS: Compound contained an impurity which was estimated to be 20% using integrated areas from computer output.


COMPOUND: Hexachloroethane

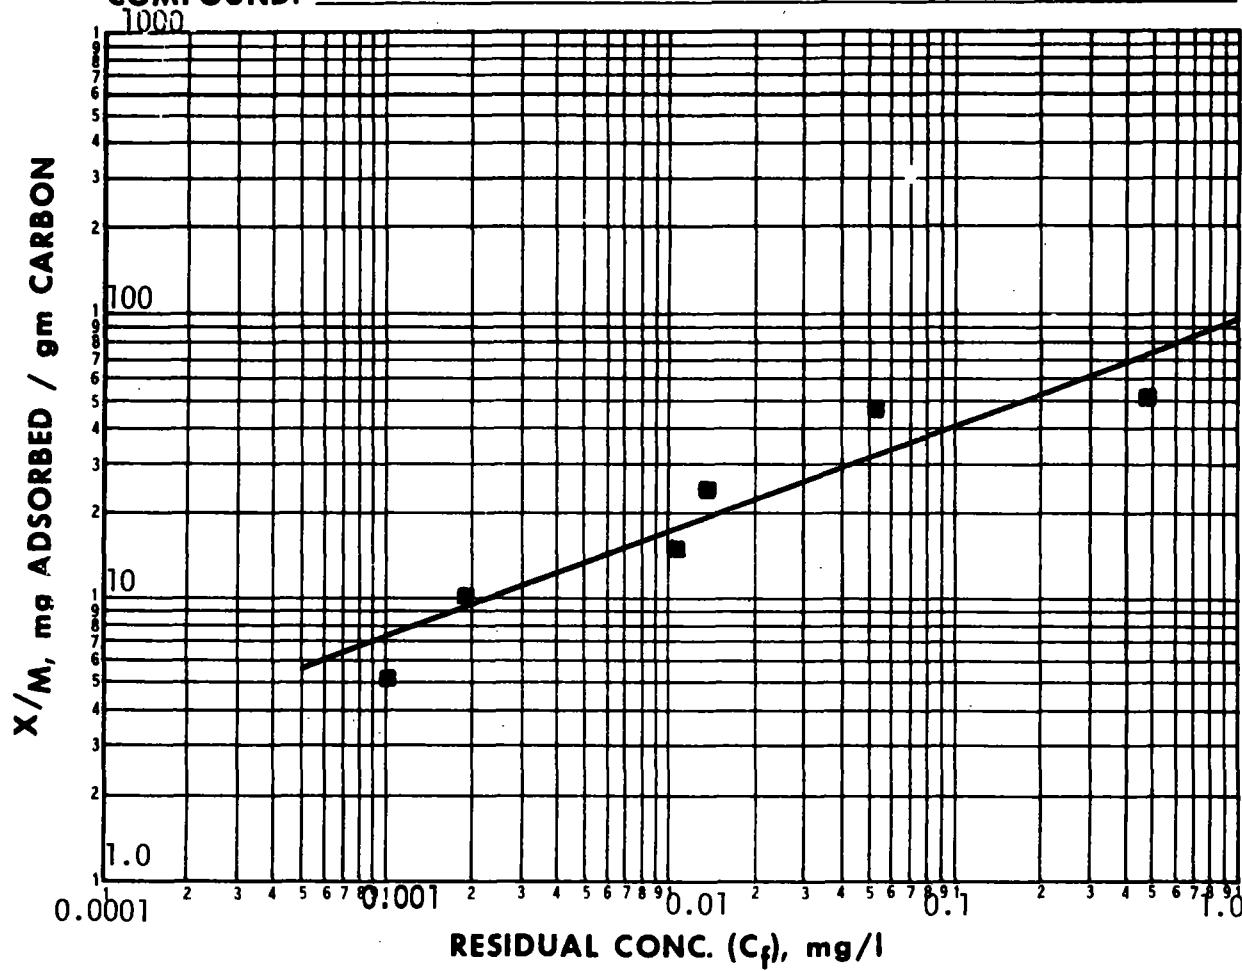

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.974								
9.6	0.484	0.490	50.9						
19.2	0.051	0.923	48.0						
38.5	0.014	0.960	25.0						
58	0.011	0.963	16.7						
96	0.002	0.972	10.1						
192	0.0010	0.973	5.06						

COMPOUND: Hexamethylenediamine

STRUCTURE:



FORMULA: $\text{C}_6\text{H}_{16}\text{N}_2$ **MOL. WT.** 116.12

FREUNDLICH PARAMETERS	pH		
K			
1/n			
Corr. Coef. r			
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

C_f , mg/l

C_0 , mg/l			


C_0 , mg/l	

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS: Not adsorbed

COMPOUND: Hexamethylenediamine

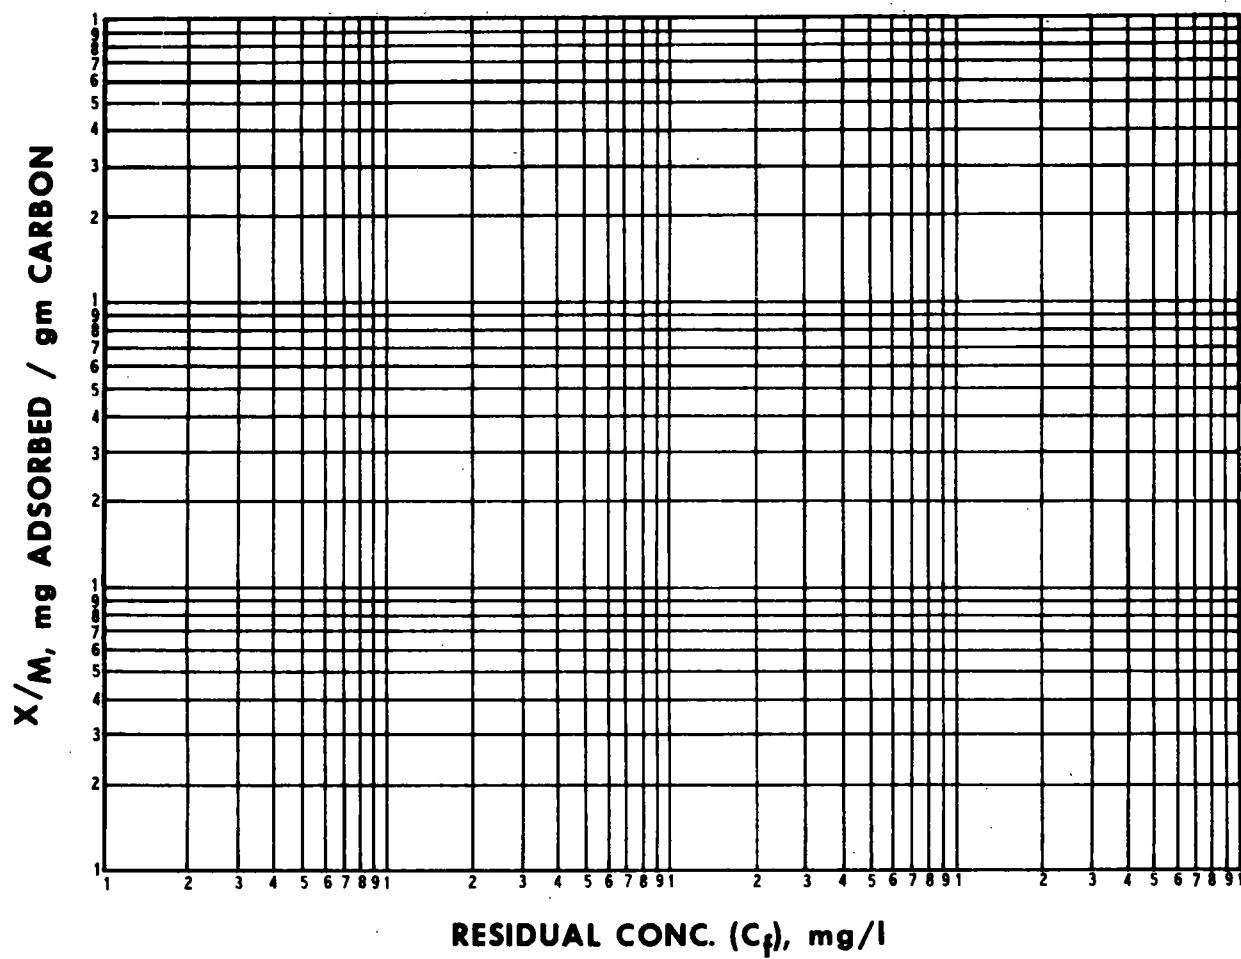

CARBON DOSE mg/l	pH= 3.0			pH= 7.01			pH= 8.95		
	C_f	C_o-C_f=X	X/M	C_f	C_o-C_f=X	X/M	C_f	C_o-C_f=X	X/M
0	12.2			11.8			11.6		
5	11.4			11.8			11.4		
10	11.2			11.2			13.2		
25	10.6			11.2			11.6		
50	11.6			12.0			11.4		
100	10.6			11.4			11.0		
150	11.4			12.0			11.2		
200	12.0			11.0			10.6		

COMPOUND: Hydroquinone

STRUCTURE:



FORMULA: $\text{C}_6\text{H}_6\text{O}_2$

MOL. WT. 110.12

FREUNDLICH PARAMETERS	pH		
	3.0		
K	90		
1/n	0.25		
Corr. Coef. r	0.93		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	160		
1.0	90		
0.1	51		
0.01	29		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	18	35	62
0.1		3.2	6.2
0.01			0.56


GRANULAR CARBON COLUMN

C_o , mg/l
1.0
0.1
0.01

(a) Carbon doses in mg/l at pH 3.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 288 nm


REMARKS: Hydroquinone is unstable at pH 7 and 9: colored products are formed.

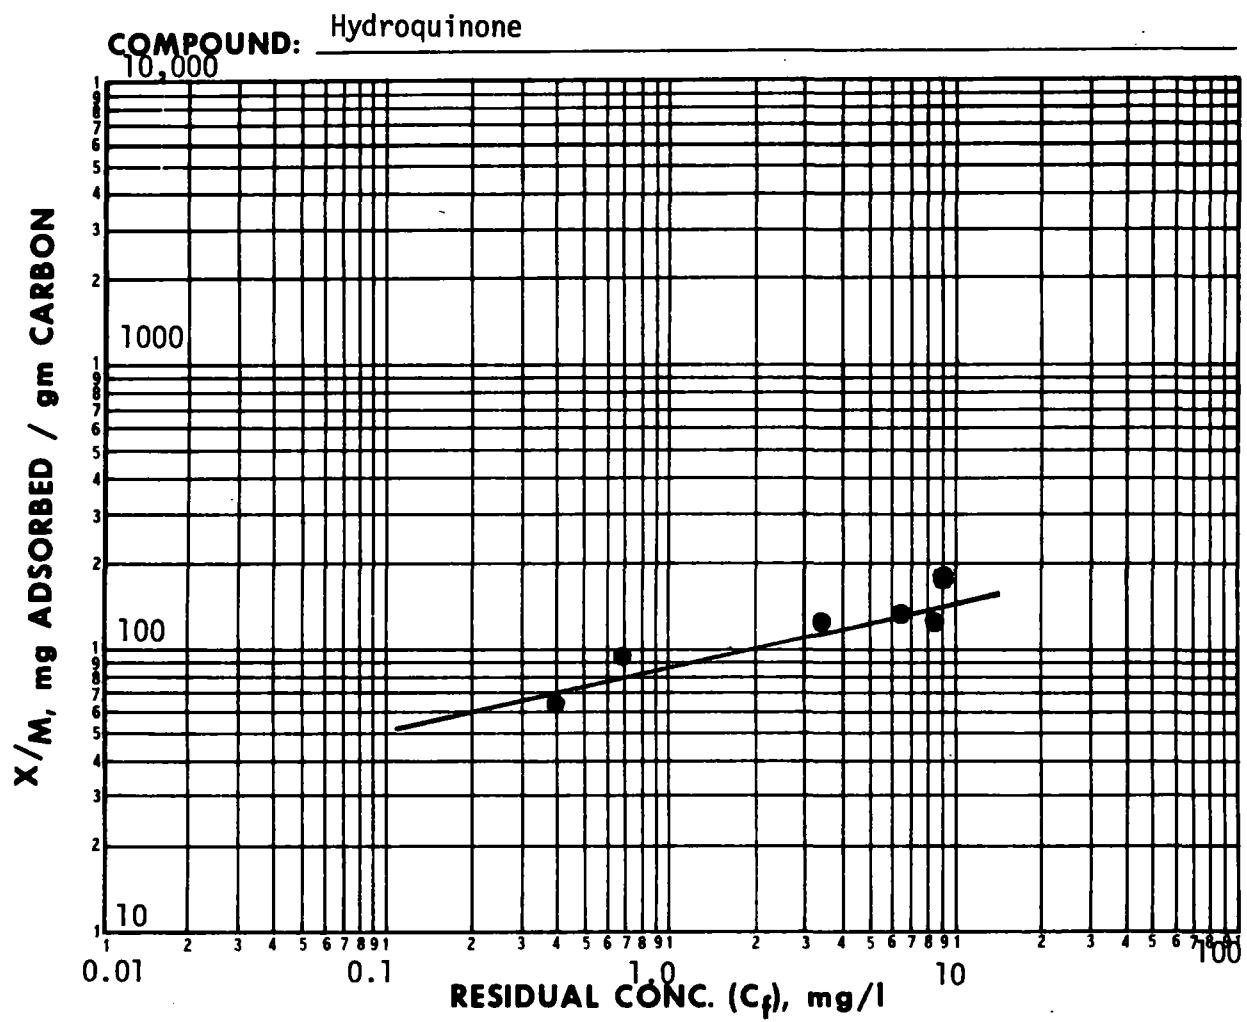

CARBON DOSE mg/l	$\bullet \text{ pH} = 3.0$			$\bullet \text{ pH} =$			$\bullet \text{ pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	10.00								
5	9.1	0.9	180						
10	8.7	1.3	130						
25	6.6	3.4	136						
50	3.4	6.6	132						
100	0.7	9.3	93						
150	0.4	9.6	64						

COMPOUND: Isophorone

STRUCTURE:



FORMULA: C₉H₁₄O

MOL. WT. 138.21

FREUNDLICH PARAMETERS	pH		
	5.5		
K	32		
1/n	0.39		
Corr. Coef. r	0.93		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10.0	78.3		
1.0	32.0		
0.1	13.1		
0.01	5.4		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	70	190	460
0.1	17	46	
0.01		4.2	


C ₀ , mg/l	
1.0	31
0.1	7.6
0.01	1.9

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Carbon

REMARKS:


COMPOUND: Isophorone

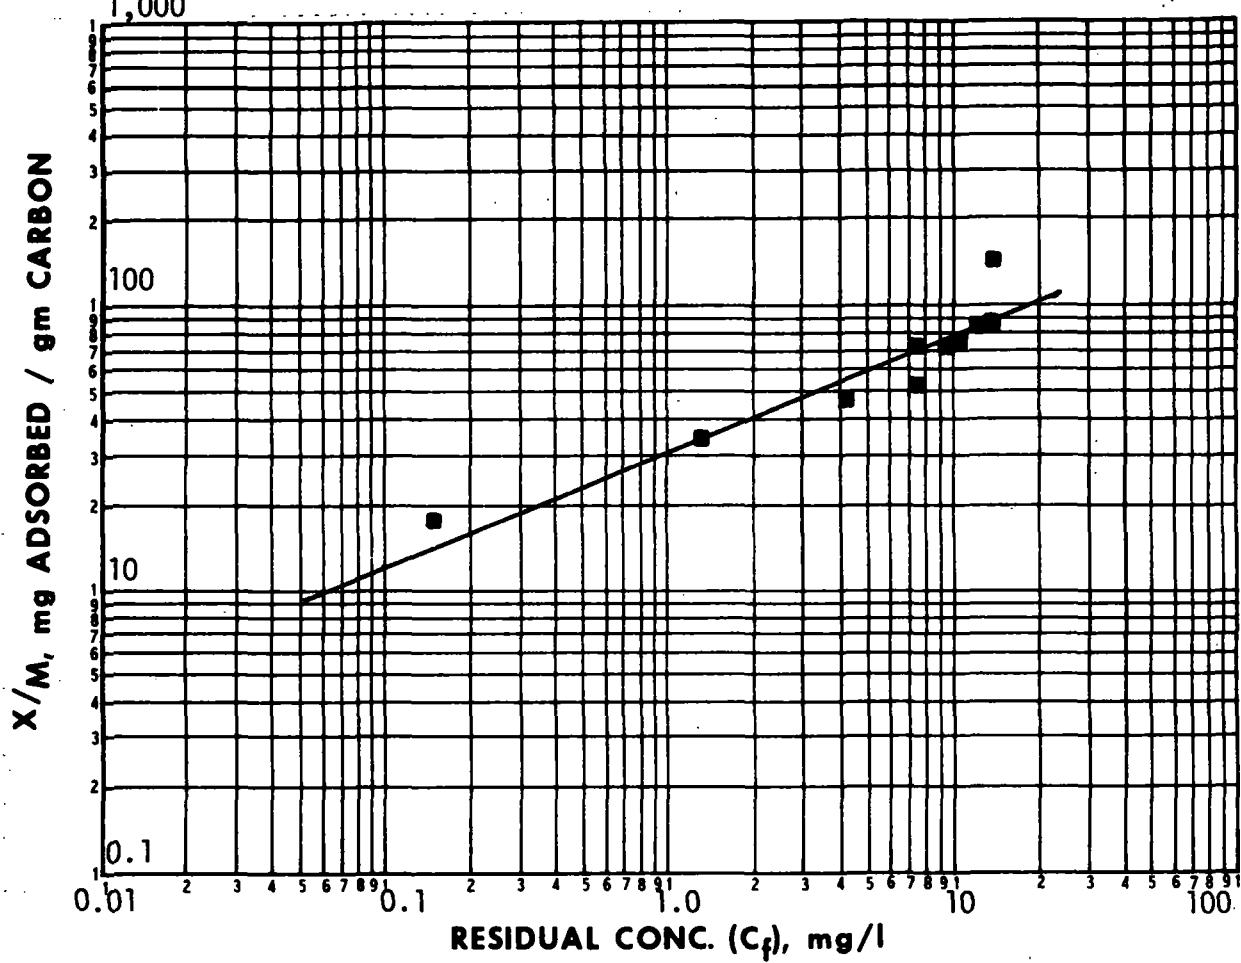

	pH = 5.5			pH =			pH =		
CARBON DOSE mg/l	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M	C _f	C _o -C _f =X	X/M
0.25	18.10			1.0					
0.25	14.32	3.78	151.2						
0.50	13.71	4.39	87.8						
0.75	11.74	6.36	84.8						
1.00	10.60	7.50	75.0						
1.25	9.31	8.79	70.32						
1.50	7.50	10.60	70.67						
2.00	7.61	10.49	52.45						
3.00	4.09	14.01	46.70						
5.00	1.30	16.80	33.60						
10.00	0.162	17.94	17.94						

COMPOUND: Methylene chloride

STRUCTURE:



FORMULA: CH_2Cl_2 MOL. WT. 84.94

FREUNDLICH PARAMETERS	pH		
	5.8		
K	1.30		
1/n	1.16		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	19.0		
1.0	1.3		
0.1	0.09		
0.01	0.006		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	10,000	>100,000	>100,000
0.1		14,000	>100,000
0.01			21,000


C_o , mg/l	
1.0	770
0.1	1,100
0.01	1,700

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G.C. - Purge and Trap

REMARKS:


COMPOUND: Methylene chloride

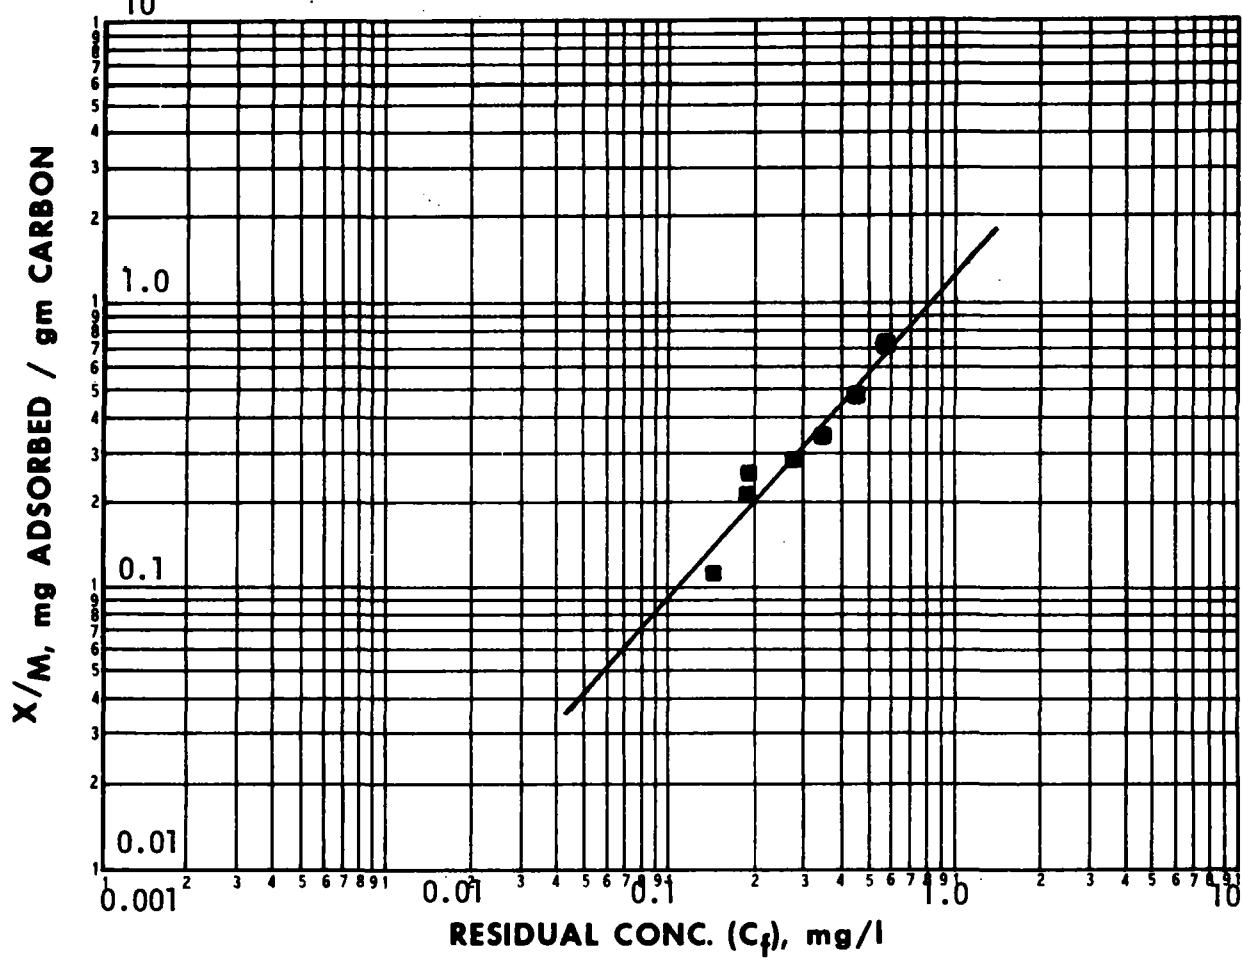

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.8$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.0								
578	0.582	0.42	0.72						
1154	0.451	0.55	0.48						
1923	0.335	0.66	0.35						
2500	0.278	0.72	0.29						
3077	0.199	0.80	0.26						
3846	0.199	0.80	0.21						
6731	0.162	0.84	0.12						

COMPOUND: 4,4'-Methylene-Bis(2-chloroaniline)

STRUCTURE:

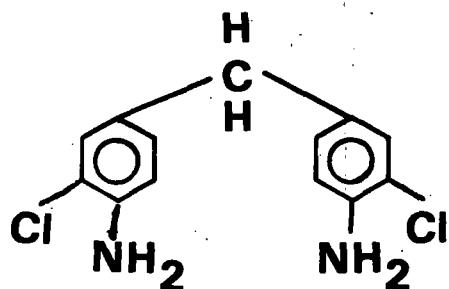

FORMULA: C₁₃H₁₂Cl₂N₂ **MOL. WT.** 264.28

FREUNDLICH PARAMETERS	pH		
	7.5		
K	190		
1/n	0.64		
Corr. Coef. r	0.90		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	820		
1.0	190		
0.1	43		
0.01	10		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	21	99	440
0.1	-	9.0	43
0.01	-	-	3.9


C ₀ , mg/l	
1.0	5.3
0.1	2.3
0.01	1.0

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 240 nm

REMARKS: OSHA regulated carcinogen.


COMPOUND: 4,4'-Methylene-bis-(2-chloroaniline)

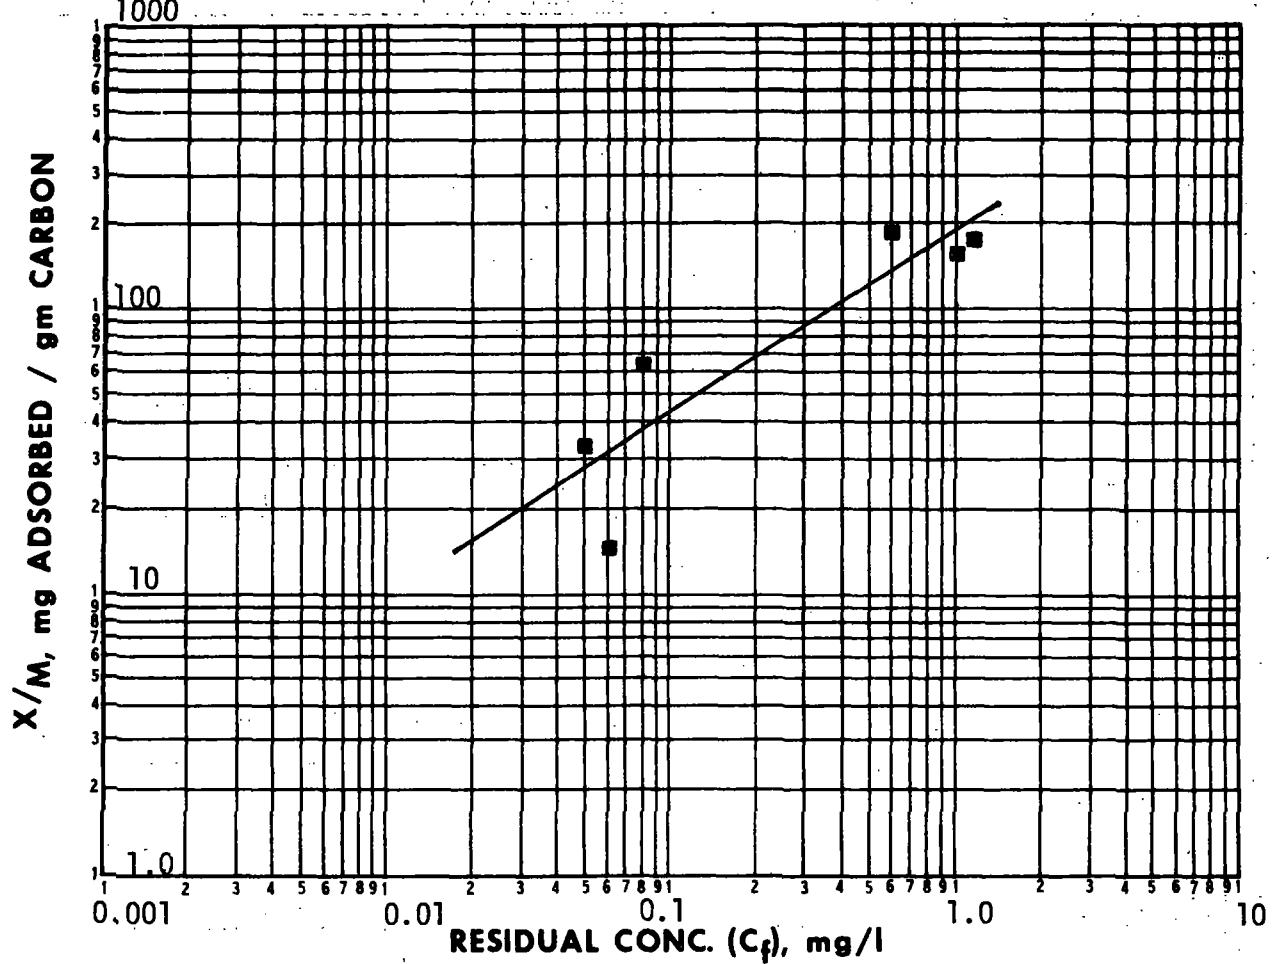

CARBON DOSE mg/l	■ pH = 7.5			pH =			pH =		
	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M
0	1.38								
1.1	1.18	0.20	177						
2.3	1.00	0.38	168						
4.1	0.60	0.78	193						
20.5	0.08	1.30	64						
40.1	0.05	1.33	33						
80.3	0.07	1.31	16						

COMPOUND: Morpholine

STRUCTURE:



FORMULA: C₄H₉NO

MOL. WT. 87.12

FREUNDLICH PARAMETERS	pH		
K			
1/n			
Corr. Coef. r			
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

C_f, mg/l

C ₀ , mg/l			

GRANULAR CARBON COLUMN


C ₀ , mg/l	

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS: Not adsorbed

COMPOUND: Morpholine

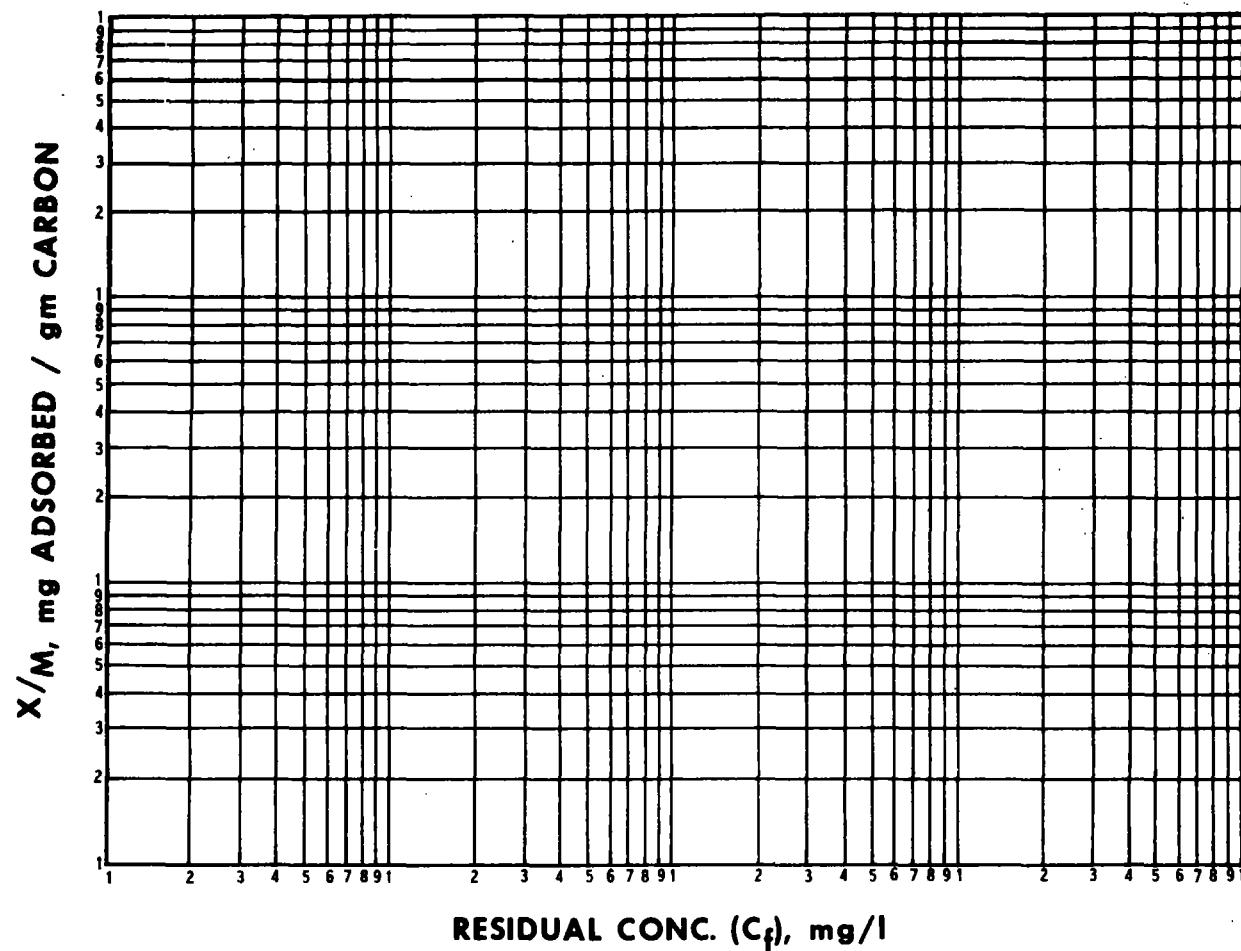

CARBON DOSE mg/l	pH = 3.0			pH = 7.0			pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	11.4			13.6			12.6		
5	12.0			12.8			12.2		
10	11.6			12.2			11.2		
25	11.2			11.8			12.2		
50	11.8			12.0			13.2		
100	11.6			11.2			12.6		
150	12.2			11.4			11.0		
200	12.2			10.4			10.8		

COMPOUND: Naphthalene

STRUCTURE:



FORMULA: C₁₀H₈ **MOL. WT.** 128.18

FREUNDLICH PARAMETERS	pH		
	5.6		
K	132		
1/n	0.42		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	132		
0.1	50		
0.01	19		
0.001	7.3		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	18	52	140
0.1		4.7	13
0.01			1.2

GRANULAR CARBON COLUMN


C ₀ , mg/l	
1.0	7.6
0.1	2.0
0.01	0.5

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 275.5 nm.

REMARKS:


COMPOUND: Naphthalene

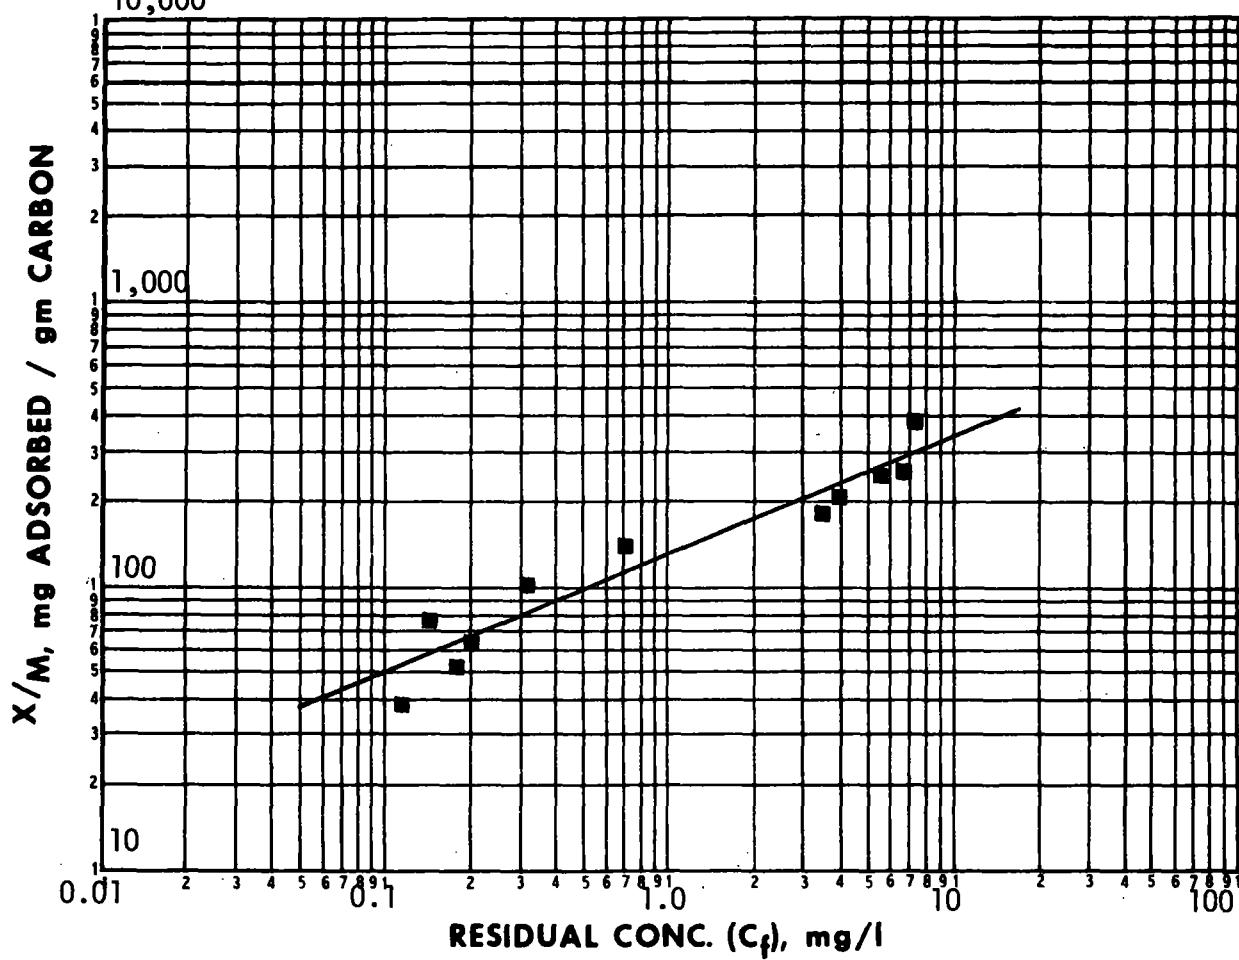

CARBON DOSE mg/l	■ pH = 5.6			pH =			pH =		
	C _f	C _o - C _f = X	X/M	C _f	C _o - C _f = X	X/M	C _f	C _o - C _f = X	X/M
0	8.07								
2.5	7.10	0.970	388						
5	6.74	1.33	266						
10	5.52	2.55	255						
20	3.97	4.10	205						
25	3.48	4.59	184						
50	0.70	7.37	147						
75	0.31	7.76	104						
100	0.15	7.92	79						
125	0.20	7.87	63						
150	0.18	7.89	40						
200	0.12	7.95							

COMPOUND: α - Naphthol

STRUCTURE:



FORMULA: $C_{10}H_8O$

MOL. WT. 144.2

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	180		
1/n	0.32		
Corr. Coef. r	0.90		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	370		
1.0	180		
0.1	85		
0.01	41		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	10	23	48
0.1		2.1	4.7
0.01			0.43

GRANULAR CARBON COLUMN


C_o , mg/l	
1.0	5.7
0.1	1.2
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 286 nm

REMARKS:


COMPOUND: α - Naphthol

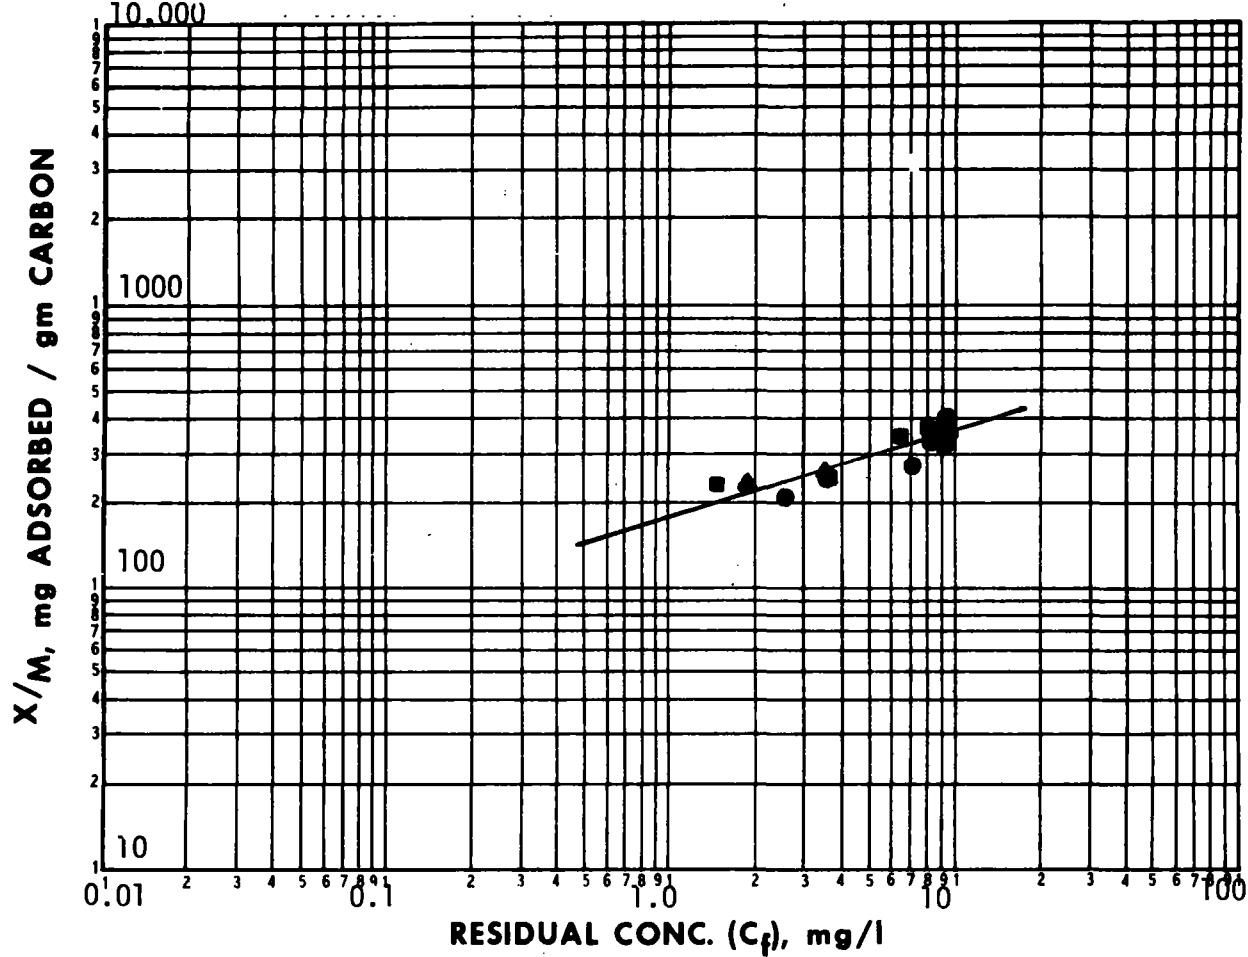

CARBON DOSE mg/l	\bullet pH = 3.0			\blacksquare pH = 7.0			\blacktriangle pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.89			9.88			9.96		
1.0	9.49	0.40	400	9.50	0.38	380	9.59	0.37	370
2.5	9.07	0.82	328	8.96	0.92	368	9.14	0.82	328
5	8.22	1.67	334	8.00	1.88	376	8.16	1.80	360
10	7.13	2.67	276	6.39	3.49	349	6.77	3.19	319
25	3.72	6.17	247	3.73	6.15	246	3.62	6.70	268
35	2.65	7.24	207	1.64	8.24	235	1.91	8.05	230

COMPOUND: B - Naphthol

STRUCTURE:



FORMULA: C₁₀H₈O

MOL. WT. 144.2

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	200		
1/n	0.26		
Corr. Coef. r	0.89		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	360		
1.0	200		
0.1	110		
0.01	59		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	8.4	17	31
0.1		1.5	3.0
0.01			0.28


C ₀ , mg/l	
1.0	5.1
0.1	1.0
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 273 nm

REMARKS:


COMPOUND: β - Naphthol

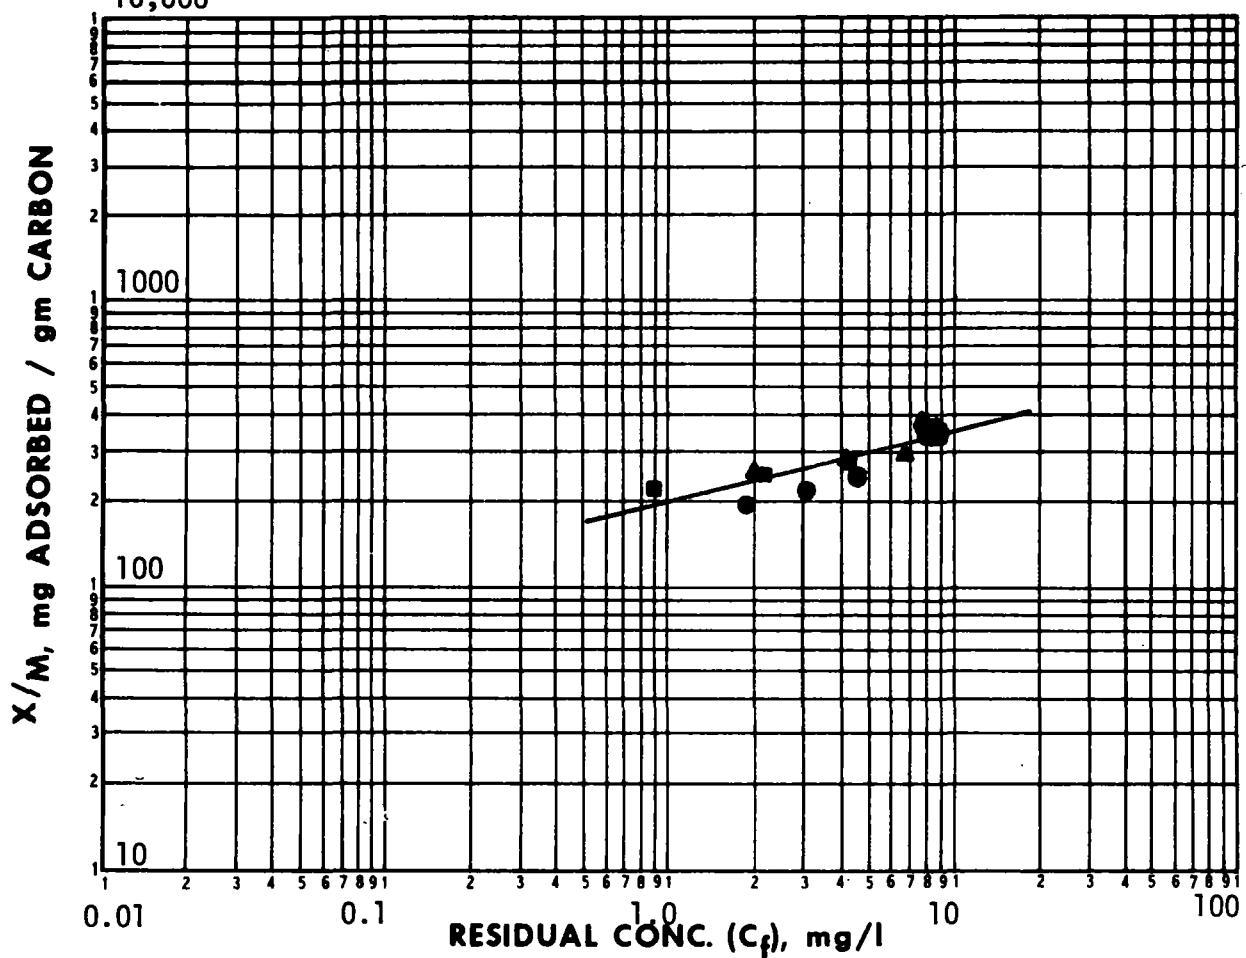

CARBON DOSE mg/l	$\bullet \text{ pH}=3.0$			$\blacksquare \text{ pH}=7.0$			$\bullet \text{ pH}=9.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.77			9.73			9.73		
2.5	8.90	0.87	348	8.87	0.86	344	8.80	0.93	372
5	8.09	1.68	336	7.85	1.88	376	7.81	1.92	384
10							6.75	2.98	298
20	4.74	5.03	251	4.16	5.57	279	4.12	5.61	281
30	3.12	6.65	222	2.21	7.52	250	1.96	7.77	259
40	1.94	7.83	196	0.90	8.83	221			

COMPOUND: α - Naphthylamine

STRUCTURE:



FORMULA: C₁₀H₉N

MOL. WT. 143.18

FREUNDLICH PARAMETERS	pH	
	3.0	pH 7 and 9 pooled
K	140	160
1/n	0.25	0.34
Corr. Coef. r	0.98	0.98
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm	
10	250	360
1.0	140	160
0.1	79	75
0.01	44	34

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	12	29	64
0.1		2.6	6.3
0.01			0.58


C ₀ , mg/l	
1.0	6.1
0.1	1.3
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 304 nm

REMARKS: OHSA regulated carcinogen


COMPOUND: α - Naphthylamine

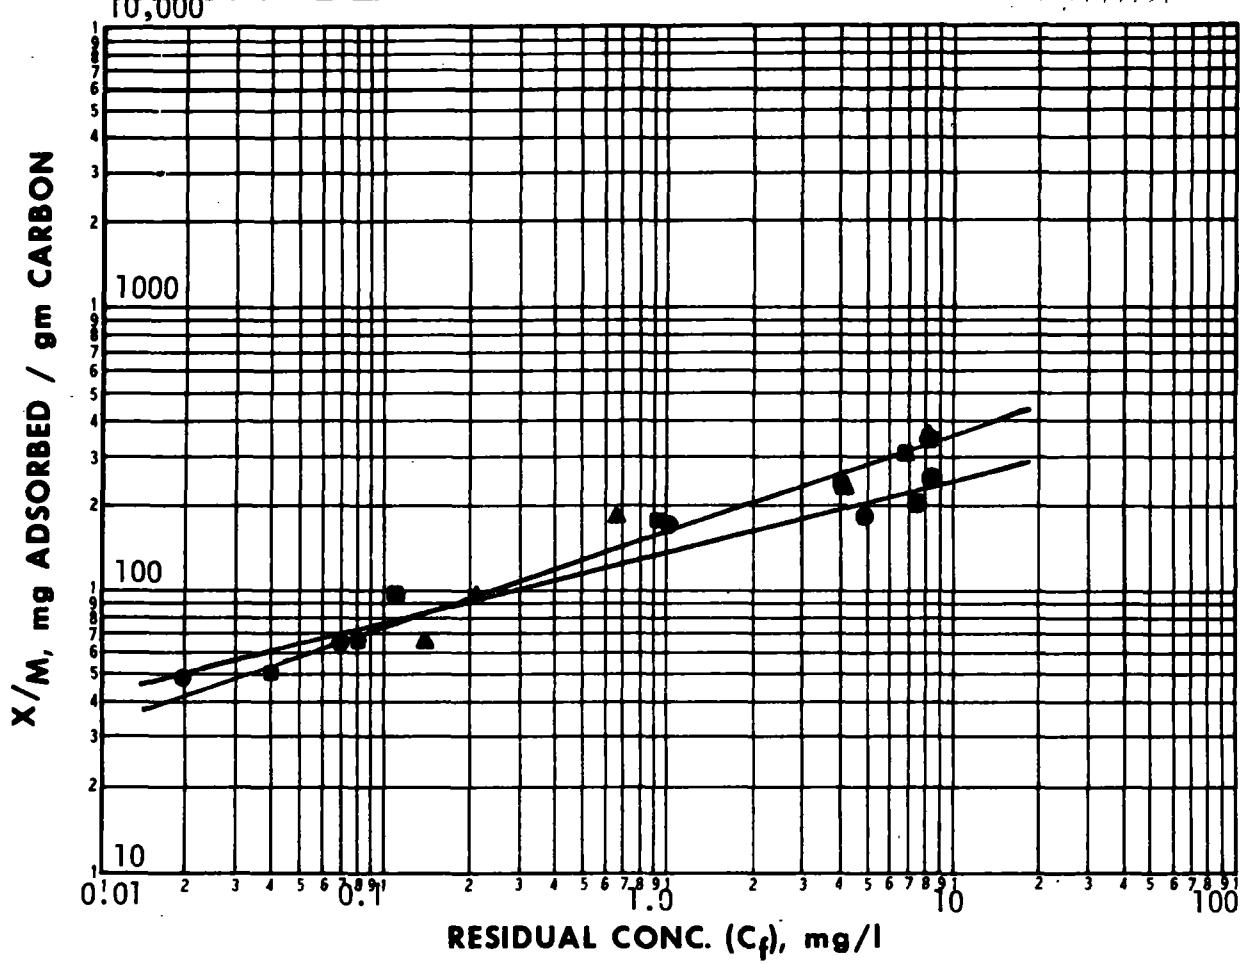

CARBON DOSE mg/l	\bullet pH = 3.0			\blacksquare pH = 7.0			\blacktriangle pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.74			9.94			9.95		
5	8.43	1.31	262	8.22	1.72	344	8.16	1.79	358
10	7.73	2.01	201	6.93	3.01	301	6.94	3.01	301
25	4.97	4.77	191	4.00	5.94	238	4.11	5.84	234
50	1.05	8.69	174	0.92	9.02	180	0.68	9.27	185
100	0.12	9.62	96	0.11	9.83	98	0.21	9.74	97
150	0.07	9.67	65	0.08	9.86	66	0.14	9.81	65
200	0.02	9.72	49	0.04	9.90	50			

COMPOUND: β -Naphthylamine

STRUCTURE:



FORMULA: $\text{C}_{10}\text{H}_9\text{N}$ **MOL. WT.** 143.19

FREUNDLICH PARAMETERS	pH		
	7.5		
K	150		
1/n	0.30		
Corr. Coef. r	0.94		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	300		
1.0	150		
0.1	75		
0.01	37		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_0 , mg/l	0.1	0.01	0.001
1.0	12	26	53
0.1		2.4	5.2
0.01			0.5


C_0 , mg/l	
1.0	6.7
0.1	1.3
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 285 nm

REMARKS: OSHA regulated carcinogen.

COMPOUND: β -Naphthylamine

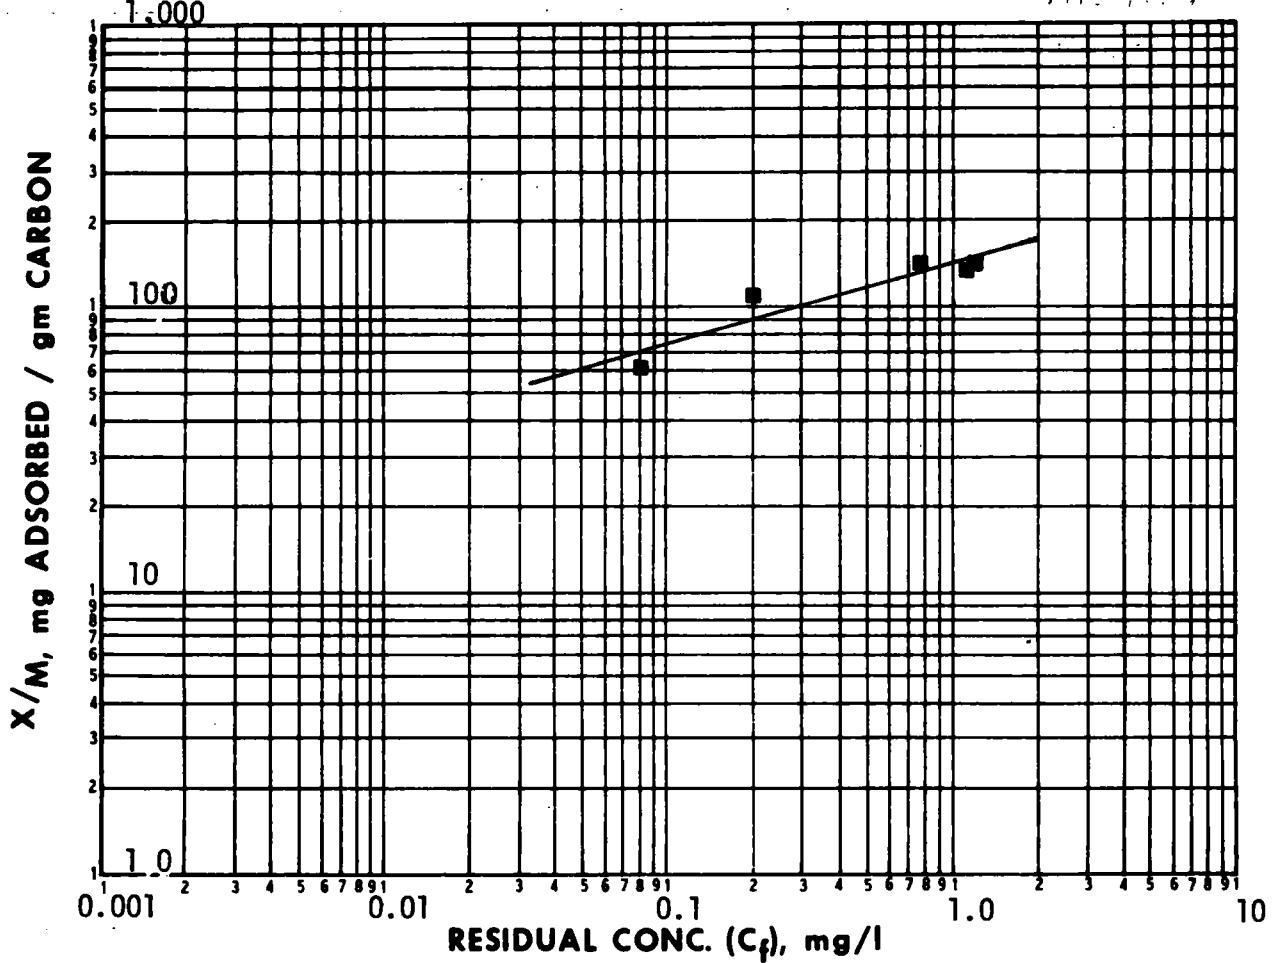

COMPOUND: ρ - Nitroaniline

STRUCTURE:



FORMULA: $\text{C}_6\text{H}_6\text{N}_2\text{O}_2$ MOL. WT. 138.13

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	140		
1/n	0.27		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	250		
1.0	140		
0.1	74		
0.01	40		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	12	25	48
0.1		2.3	4.7
0.01			0.43


C_o , mg/l	
1.0	7.4
0.1	1.4
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Visible Spectroscopy 380 nm

REMARKS:


COMPOUND: ρ - Nitroaniline

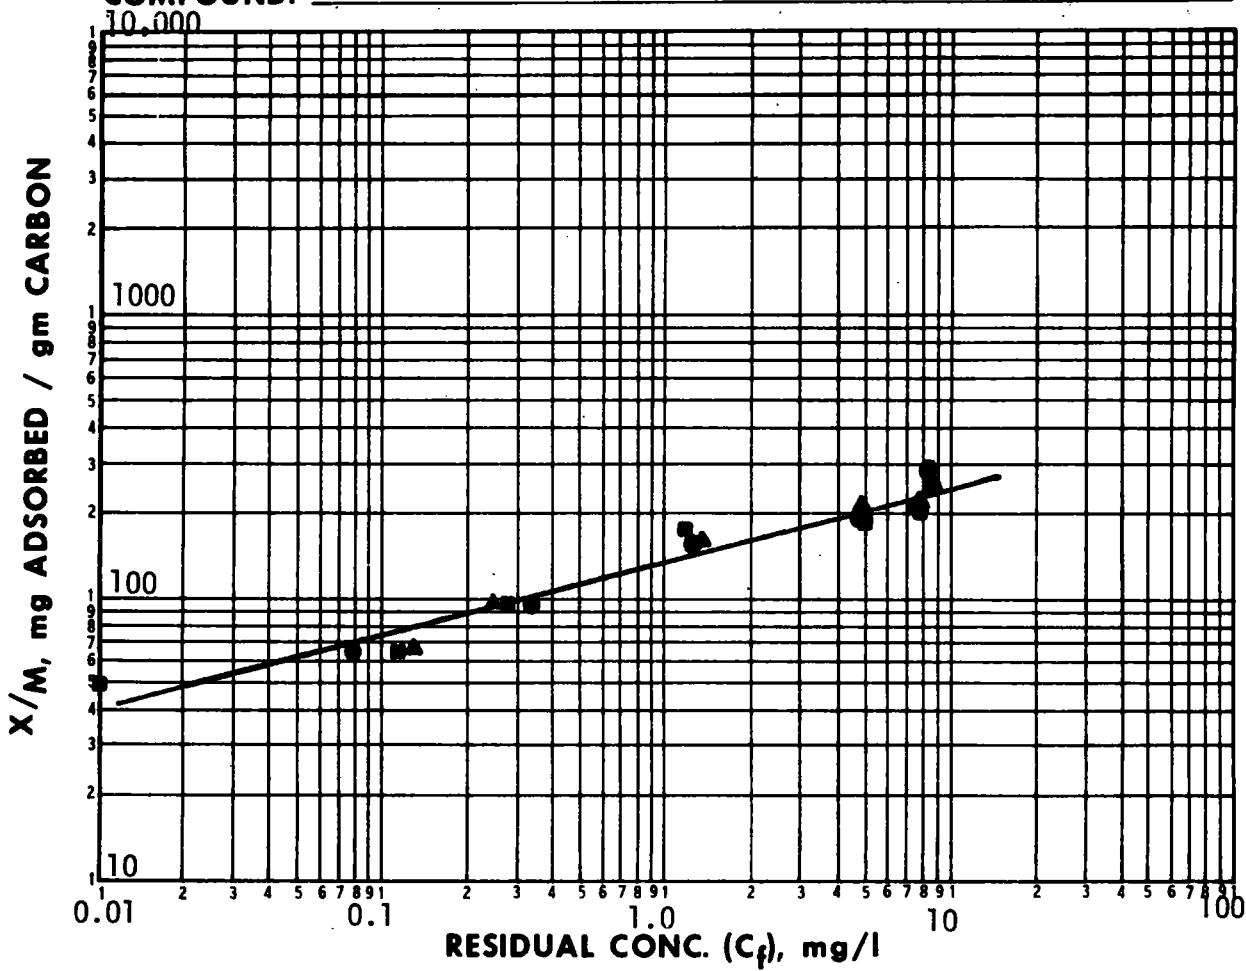

CARBON DOSE mg/l	● pH = 3.0			■ pH = 7.0			▲ pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	9.84			9.89			10.0		
5	8.37	1.47	294	8.64	1.25	250	8.71	1.29	258
10	7.75	2.09	209	7.89	2.00	200	7.85	2.15	215
25	4.92	4.92	197	5.03	4.86	194	4.94	5.06	202
50	1.29	8.55	171	1.24	8.65	173	1.39	8.61	172
100	0.34	9.50	95	0.28	9.61	96	0.25	9.75	98
150	0.08	9.76	65	0.12	9.77	65	0.13	9.87	66
200				0.01	9.88	49	0.03	9.97	50

COMPOUND: Nitrobenzene

STRUCTURE:



FORMULA: C6H5NO2

MOL. WT. 123.11

FREUNDLICH PARAMETERS	pH		
	7.5		
K	68		
1/n	0.43		
Corr. Coef. r	0.97		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	180		
1.0	68		
0.1	25		
0.01	9.3		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	36	110	290
0.1		9.6	28
0.01			2.6


C_o , mg/l	
1.0	15
0.1	4.0
0.01	1.1

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS:

COMPOUND: Nitrobenzene

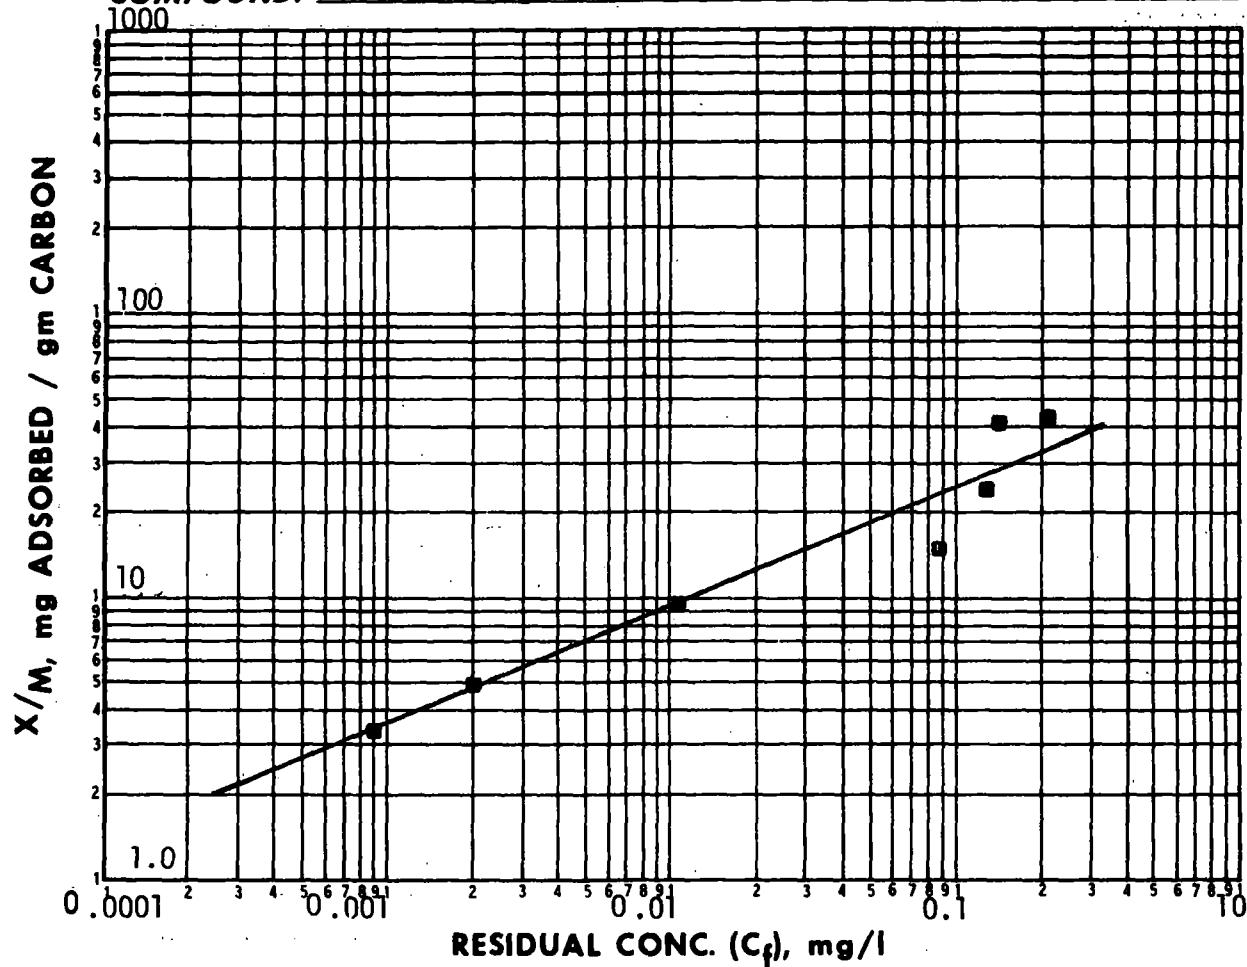

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 7.5$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.250								
1	0.208	0.042	42.0						
2.5	0.149	0.101	40.4						
5	0.130	0.120	24.0						
10	0.089	0.162	16.2						
25	0.0115	0.239	9.54						
50	0.002	0.248	4.96						
75	0.0009	0.249	3.32						

COMPOUND: 4 - Nitrobiphenyl

STRUCTURE:



FORMULA: C₁₂H₉NO₂ **MOL. WT.** 199.21

FREUNDLICH PARAMETERS	pH		
	7.0		
K	370		
1/n	0.27		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	690		
1.0	370		
0.1	200		
0.01	110		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

C _o , mg/l	0.1	0.01	0.001
1.0	4.5	9.3	18
0.1		0.8	1.7
0.01			0.2
			.

GRANULAR CARBON COLUMN


C _o , mg/l	
1.0	2.7
0.1	0.5
0.01	0.1

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 325 nm

REMARKS: OSHA regulated carcinogen


COMPOUND: 4-Nitrobiphenyl

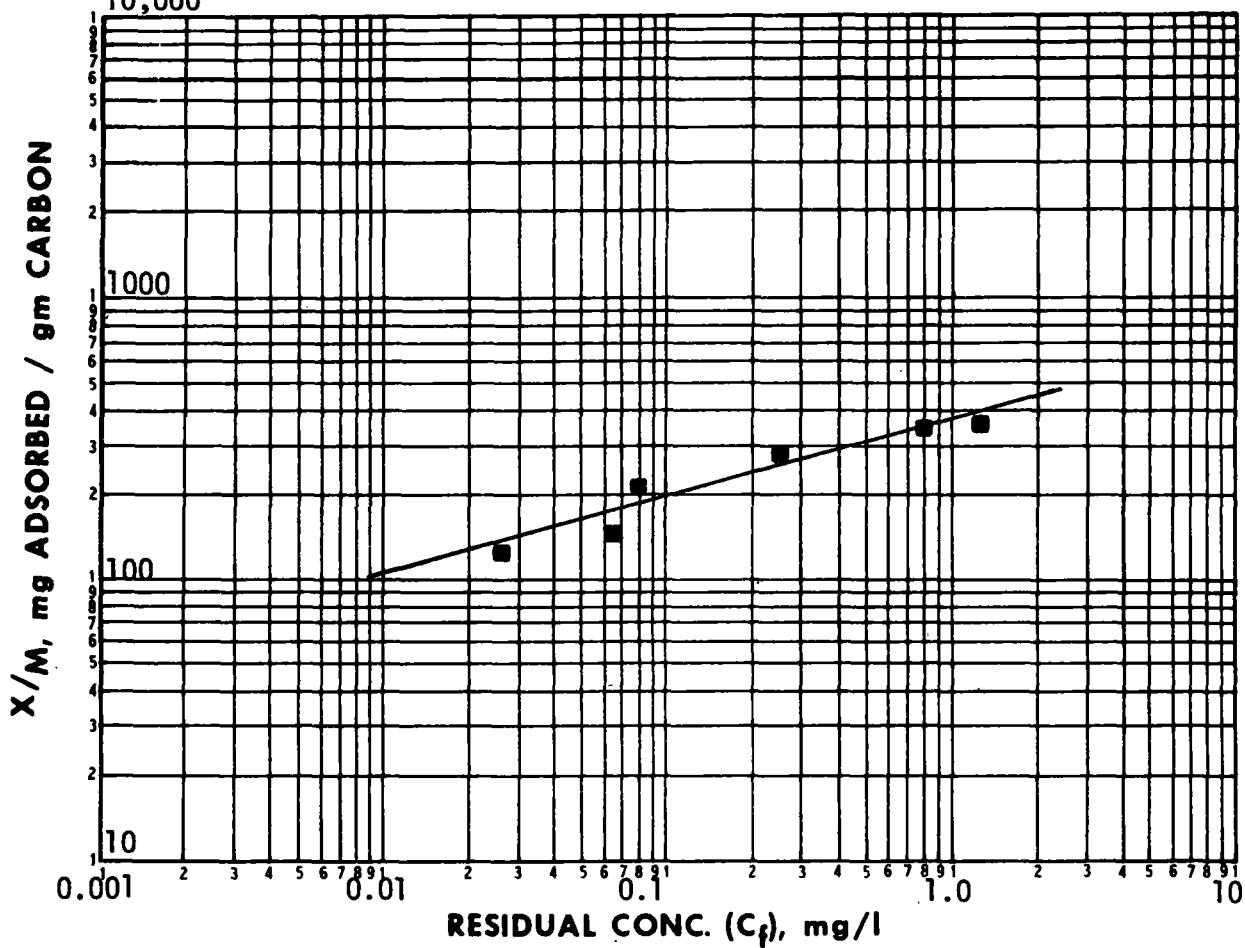

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 7.0$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.670								
1.0	1.30	0.370	370						
2.5	0.800	0.870	348						
5.0	0.260	1.410	282						
7.5	0.082	1.588	212						
10.0	0.064	1.606	161						
12.5	0.027	1.643	131						

COMPOUND: 2-Nitrophenol

STRUCTURE:



FORMULA: C₆H₅NO₃

MOL. WT. 139.11

FREUNDLICH PARAMETERS	pH		
	3.0	5.5	9.0
K	101	99	85
1/n	0.26	0.34	0.39
Corr. Coef. r	0.99	0.97	0.97
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	101	99	85
0.1	56	46	35
0.01	31	21	14
0.001	17	9.6	5.7

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	20	47	100
0.1		4.3	10
0.01			1.0


C ₀ , mg/l	
1.0	10
0.1	2.2
0.01	0.5

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 278.6 nm

REMARKS:


COMPOUND: 2-Nitrophenol

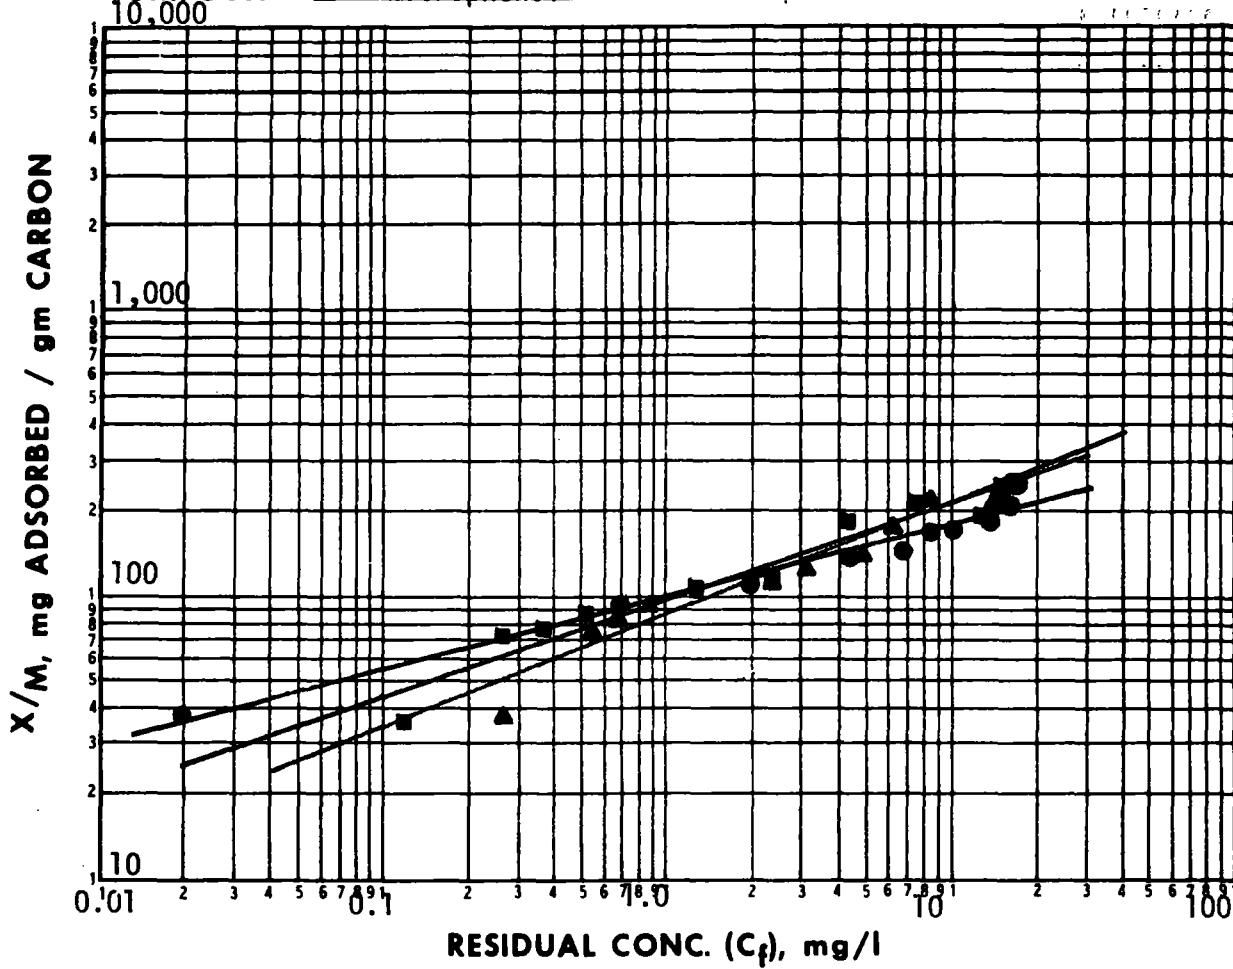

CARBON DOSE mg/l	● pH = 3.0			■ pH = 5.5			▲ pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	19.03			18.20			19.51		
5	17.74	1.29	258						
10	17.00	2.03	203	15.74	2.46	246	16.93	2.58	258
15	15.79	3.24	216						
25	14.33	4.70	188	13.29	4.91	196	14.18	5.33	213
50	10.09	8.94	179	7.28	10.92	218	8.36	11.15	223
60	8.59	10.44	174						
75	6.95	12.08	161	4.26	13.94	186	6.13	13.38	178
100	4.34	14.69	147	3.84	14.36	144	4.89	14.62	146
125	2.00	17.03	114	2.35	15.85	127	3.13	16.38	131
150				1.31	16.89	113	2.34	17.17	114
200	0.70	18.33	92	0.51	17.69	88	0.87	18.64	93
225				0.37	17.83	79	0.68	18.83	84
250				0.27	17.93	72	0.53	18.98	76
500	0.02	19.01	38	0.12	18.08	36	0.27	19.24	38

COMPOUND: 4-Nitrophenol

STRUCTURE:



FORMULA: C₆H₅NO₃

MOL. WT. 139.11

FREUNDLICH PARAMETERS	pH		
	3.0	5.4	9.0
K	80.2	76.2	71.2
1/n	0.17	0.25	0.28
Corr. Coef. r	0.86	0.92	0.93
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	80	76	71
0.1	54	43	38
0.01	37	24	20
0.001	25	14	11

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	21	41	74
0.1		3.7	7.3
0.01			0.7

GRANULAR CARBON COLUMN


C ₀ , mg/l
1.0
0.1
0.01

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 316.8 nm

REMARKS:


COMPOUND: 4-Nitrophenol

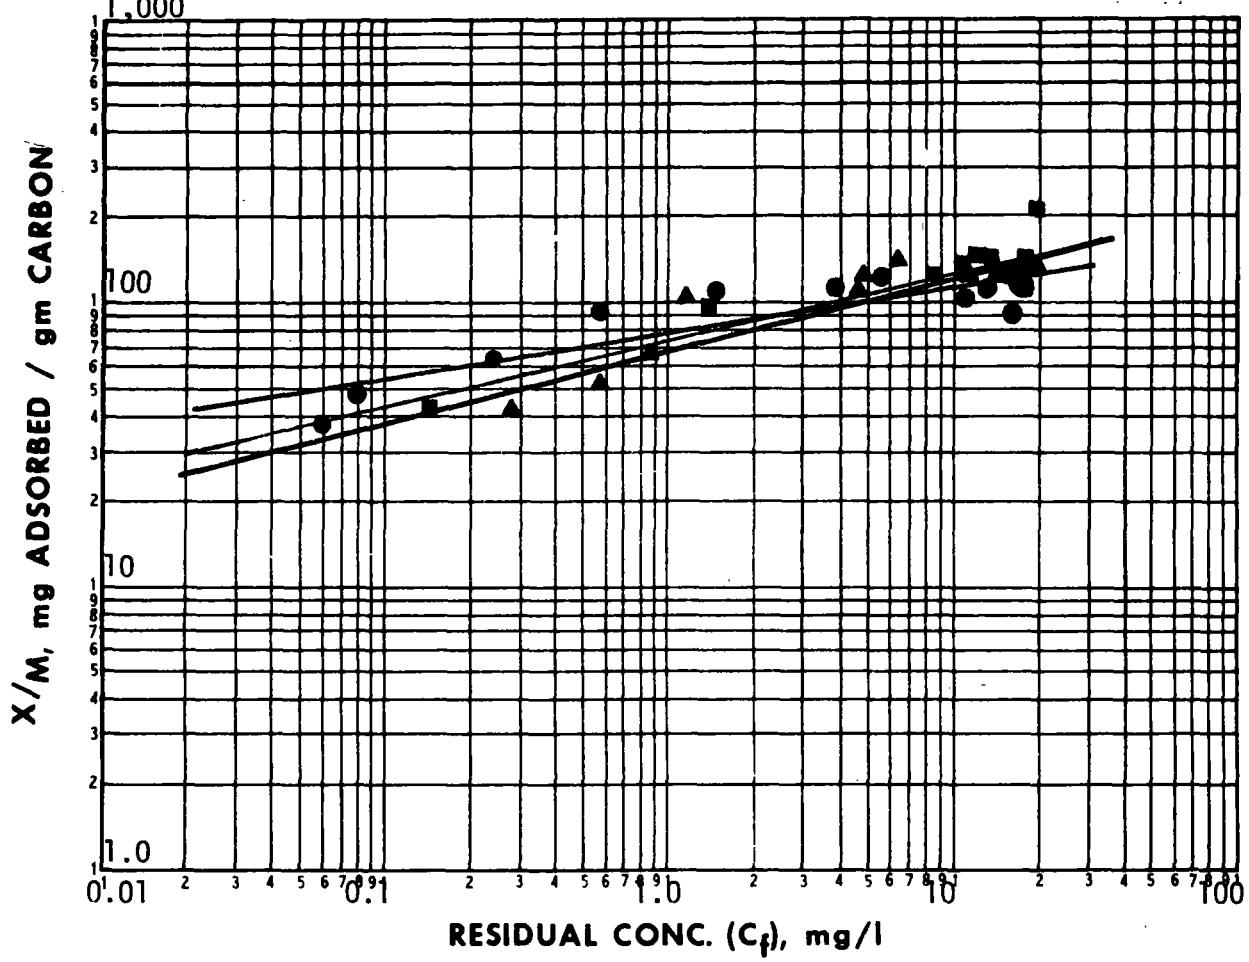

CARBON DOSE mg/l	● pH = 3.0			■ pH = 5.4			▲ pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	19.16			21.34			21.29		
10	17.92	1.24	124	19.25	2.09	209	19.84	1.45	145
20				18.33	3.01	150			
25	16.90	2.26	90	18.27	3.07	123	17.82	3.47	139
30				17.35	3.99	133			
40				16.03	5.31	133			
50	13.17	5.99	120	13.41	7.93	159	14.51	6.78	136
60				11.60	9.74	162			
75	11.20	7.96	106	10.41	10.93	146	11.39	9.90	132
100	5.75	13.41	134	8.31	13.03	130	6.25	15.04	150
125	3.97	15.19	122				4.86	16.43	131
150	1.58	17.58	117				4.60	16.69	111
200	0.58	18.58	93	1.44	19.90	99	1.18	20.11	191
300	0.24	18.92	63				0.84	20.45	68
400	0.08	19.08	48	0.15	21.19	42	0.57	20.72	52
500	0.06	19.10	38				0.28	21.01	42

COMPOUND: N - Nitrosodiphenylamine

STRUCTURE:



FORMULA: C₁₂H₁₀N₂O

MOL. WT. 198.07

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	220		
1/n	0.37		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	510		
1.0	220		
0.1	91		
0.01	38		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

GRANULAR CARBON COLUMN

C _o , mg/l	0.1	0.01	0.001
1.0	9.8	25	60
0.1		2.3	5.9
0.01			0.54


C _o , mg/l
1.0
0.1
0.01

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 290 nm

REMARKS:


COMPOUND: N - Nitrosodiphenylamine

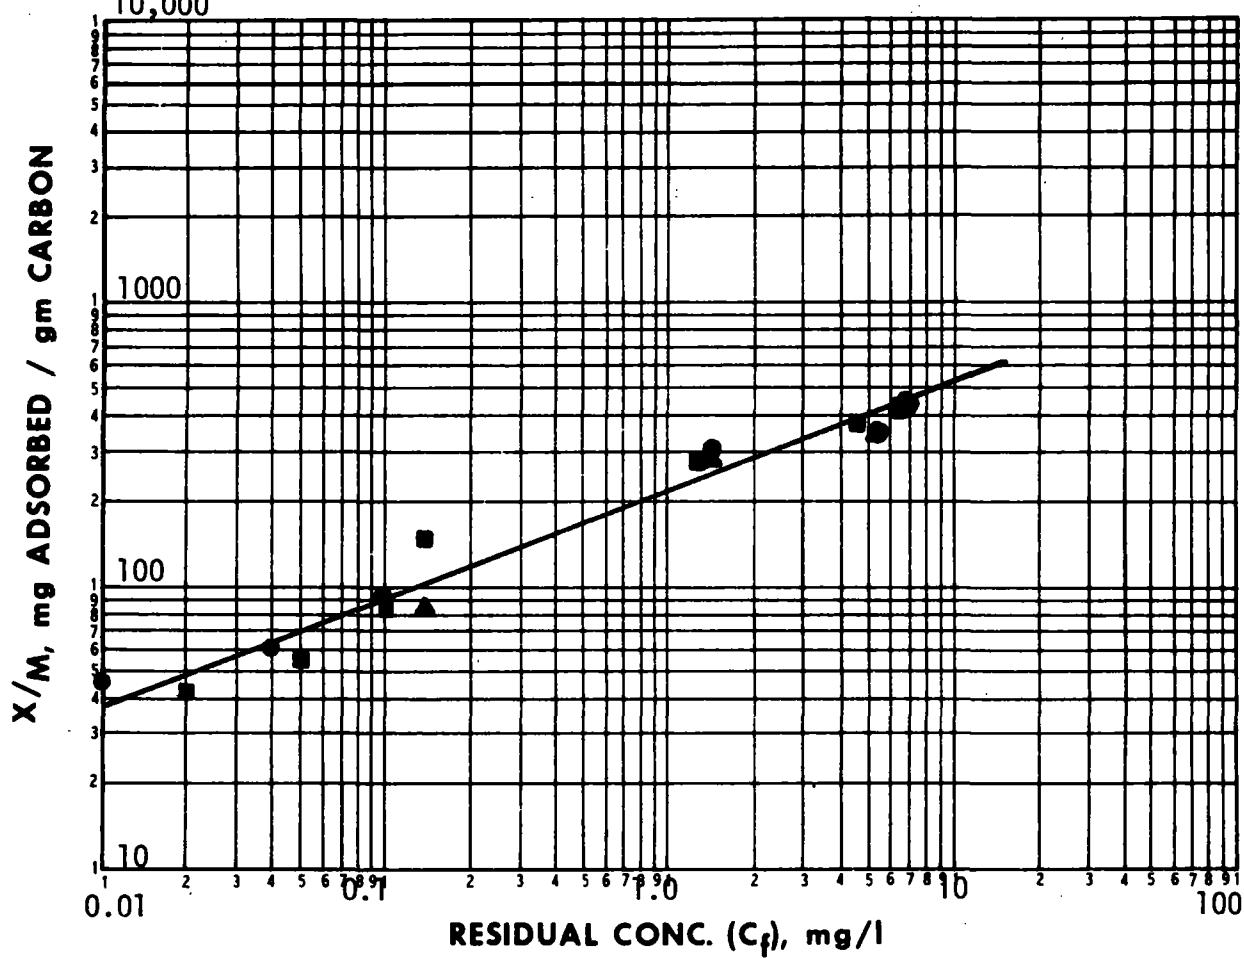

CARBON DOSE mg/l	$\bullet \text{ pH}=3.0$			$\blacksquare \text{ pH}=7.0$			$\blacktriangle \text{ pH}=9.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.18			8.36			8.70		
5	6.99	2.19	438	6.23	2.13	426	6.64	2.06	412
10	5.60	3.58	358	4.60	3.76	376	5.15	3.55	355
25	1.62	7.56	302	1.29	7.07	282	1.45	7.25	290
50				0.14	8.22	164			
100	0.10	9.08	91	0.10	8.26	83	0.14	8.56	86
150	0.04	9.14	61	0.05	8.31	55			
200	0.01	9.17	46	0.02	8.34	42			

COMPOUND: N-Nitrosodi-n-propylamine

STRUCTURE:

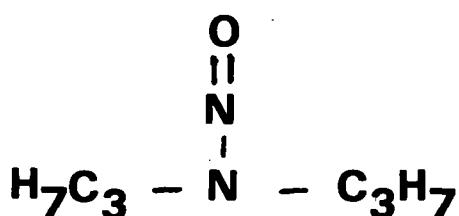

FORMULA: $\text{C}_6\text{H}_{14}\text{N}_2\text{O}$

MOL. WT. 130.19

FREUNDLICH PARAMETERS	pH		
	All Data Pooled		
K	24.4		
1/n	0.26		
Corr. Coef. r	0.87		

INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
	24		
1.0	24		
0.1	13		
0.01	7.4		
0.001	4.0		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

C_f , mg/l

GRANULAR CARBON COLUMN

C_o , mg/l	0.1	0.01	0.001
1.0	67	130	250
0.1		12	24
0.01			2.2


C_o , mg/l	
1.0	42
0.1	7.7
0.01	1.4

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 232.4 nm

REMARKS:

COMPOUND: N-Nitrosodi-n-propylamine

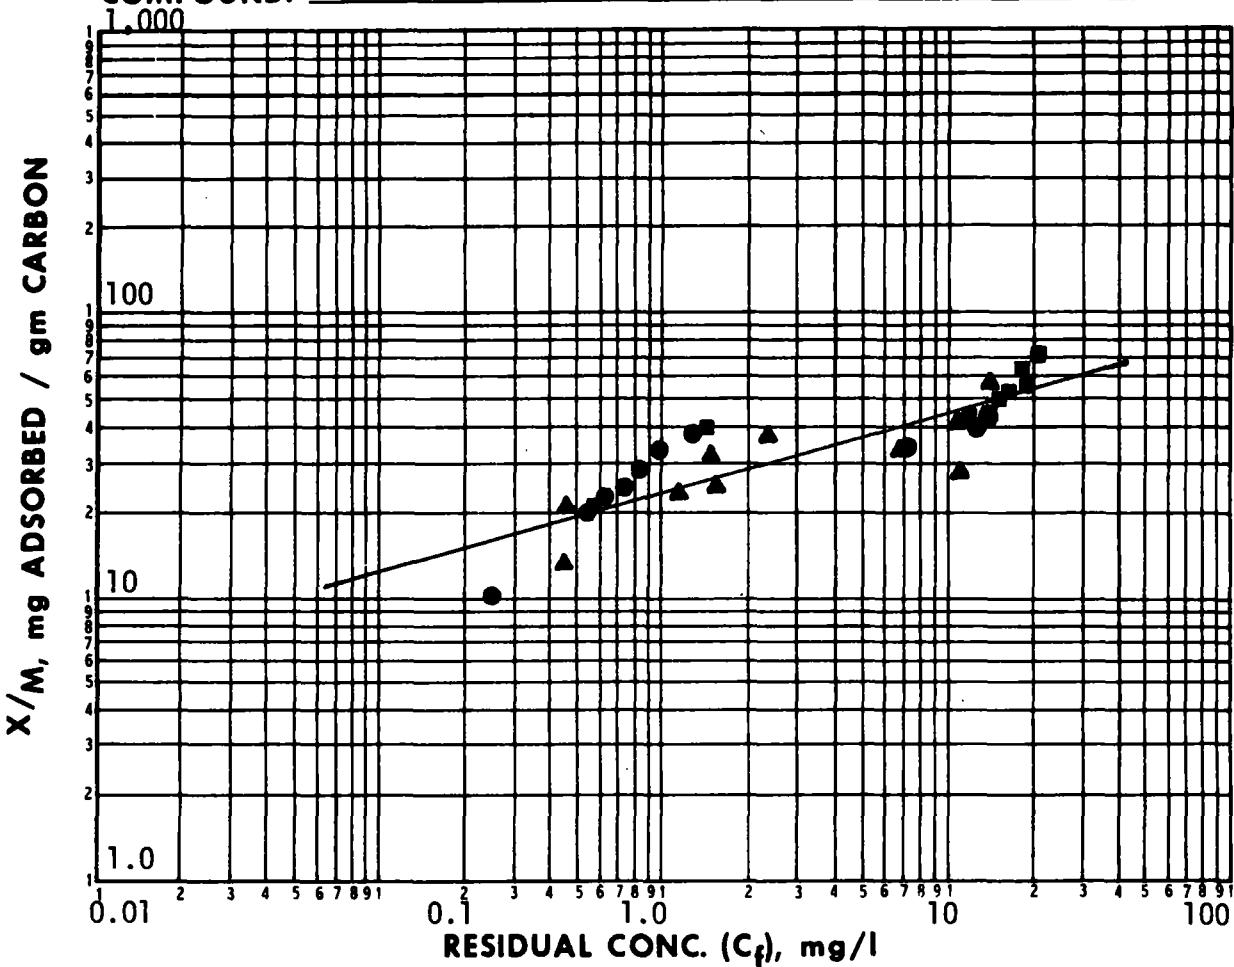

CARBON DOSE mg/l	pH = 3.0			pH = 5.3			pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0 0	20.83			21.25			16.74		
10				20.53	0.72	72.0			
25 38.5				19.83	1.42	56.8	14.47	2.27	59.0
50				18.06	3.19	63.8			
75 96.2				17.35	3.90	52.0	12.88	3.86	40.1
100				16.25	5.00	50.0			
125 135				14.90	6.35	58.8	11.22	5.52	40.9
150	14.40	6.43	42.9	14.44	6.81	45.4			
200 192	12.75	8.08	40.4	12.30	8.95	44.8	11.09	5.65	29.4
400	7.21	13.62	34.0						
500 288	1.31	19.52	39.0	1.48	19.77	39.5	6.84	9.90	34.4
600 385	1.03	19.80	33.0				2.30	14.44	37.5
700 480	0.85	19.98	28.5				1.60	15.14	31.5
800 577	0.75	20.08	25.1				1.66	15.08	26.1
900 673	0.62	20.21	22.5				1.18	15.56	23.1
1000 769	0.55	20.28	20.3	0.58	20.67	20.07	0.47	16.27	21.1
2000 1150	0.26	20.57	10.3				0.44	16.30	14.1

COMPOUND: p - Nonylphenol

STRUCTURE:



FORMULA: C₁₅H₂₄O

MOL. WT. 220.34

FREUNDLICH PARAMETERS	pH		
	3.0	7.0	9.0
K	53	250	150
1/n	1.04	0.37	0.27
Corr. Coef. r	0.97	0.99	0.98
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	580	600	280
1.0	53	250	150
0.1	4.8	110	80
0.01	0.44	46	43

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C _o , mg/l	0.1	0.01	0.001
1.0	8.3	21	51
0.1		2.0	5.0
0.01			0.5


C _o , mg/l	
1.0	3.9
0.1	0.9
0.01	0.2

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 237 nm. All samples adjusted to pH 12 for U.V. measurement.

REMARKS:



COMPOUND: p - Nonylphenol

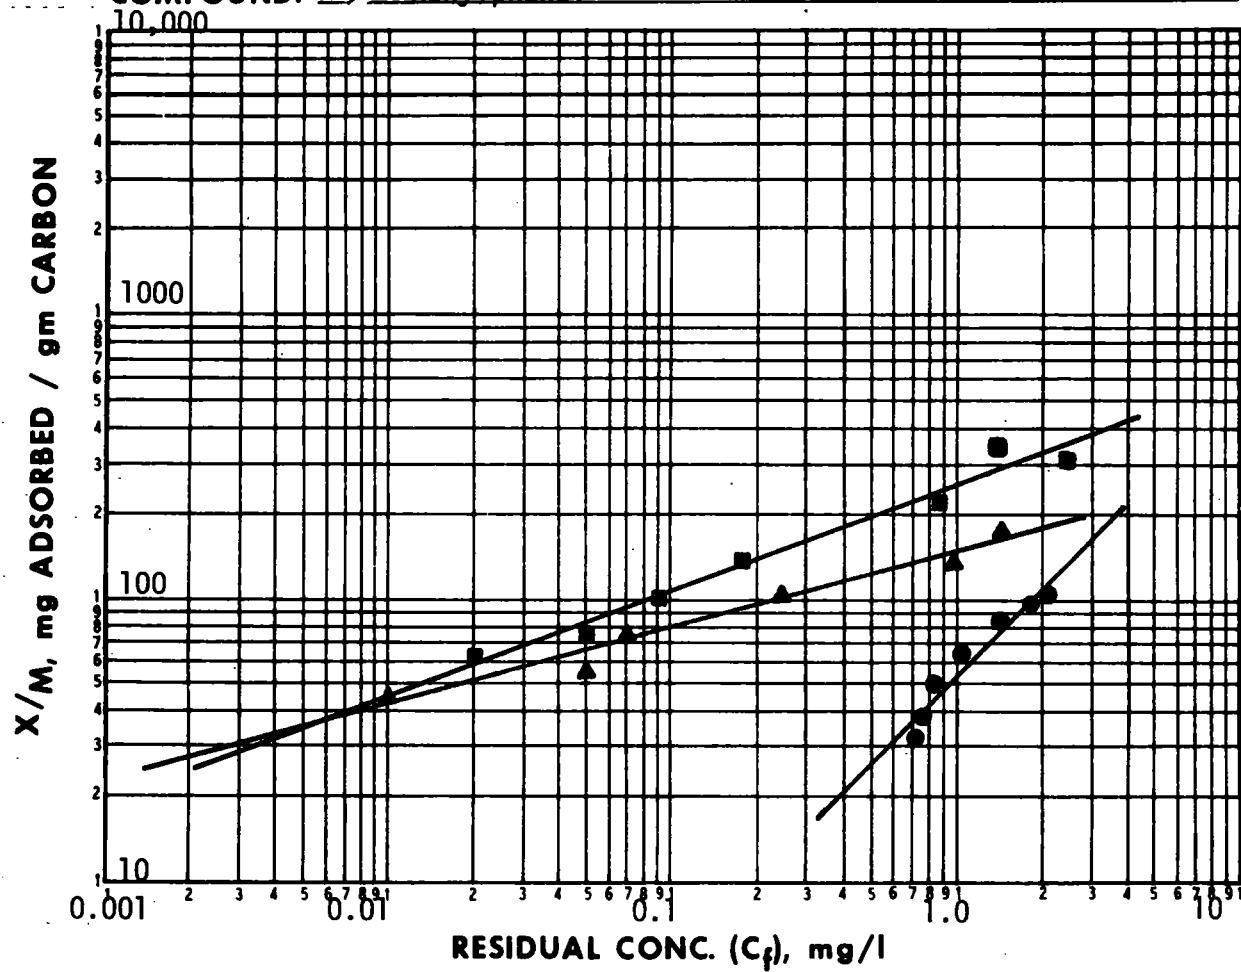

CARBON DOSE mg/l	\bullet pH = 3.0			\blacksquare pH = 7.0			\blacktriangle pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	2.34			3.13			2.35		
2.5	2.08	0.26	104	2.36	0.77	308			
5	1.85	0.49	98	1.39	1.74	348	1.46	0.89	178
10	1.50	0.84	84	0.88	2.25	225	0.99	1.36	136
20	1.06	1.28	64	0.18	2.95	148	0.24	2.11	106
30	0.85	1.49	50	0.09	3.04	101	0.07	2.28	76
40	0.78	1.56	39	0.05	3.08	77	0.05	2.30	57
50	0.72	1.62	32	0.02	3.11	62	0.01	2.34	46

COMPOUND: PCB 1221

STRUCTURE:

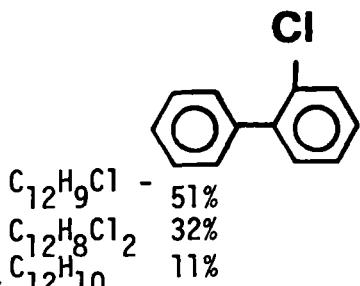

1221

FORMULA: MOL. WT. ~ 200.7

FREUNDLICH PARAMETERS	pH		
	5.3		
K	242		
1/n	0.70		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	242		
0.1	48		
0.01	9.5		
0.001	1.9		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)


SINGLE STAGE POWDERED CARBON		GRANULAR CARBON COLUMN	
C_f , mg/l			
C_o , mg/l	0.1	0.01	0.001
1.0	19	100	520
0.1		9.3	52
0.01			5.7

C_o , mg/l	
1.0	4.1
0.1	2.1
0.01	1.1

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent extraction - G.C.


REMARKS: Structures shown are for major components.

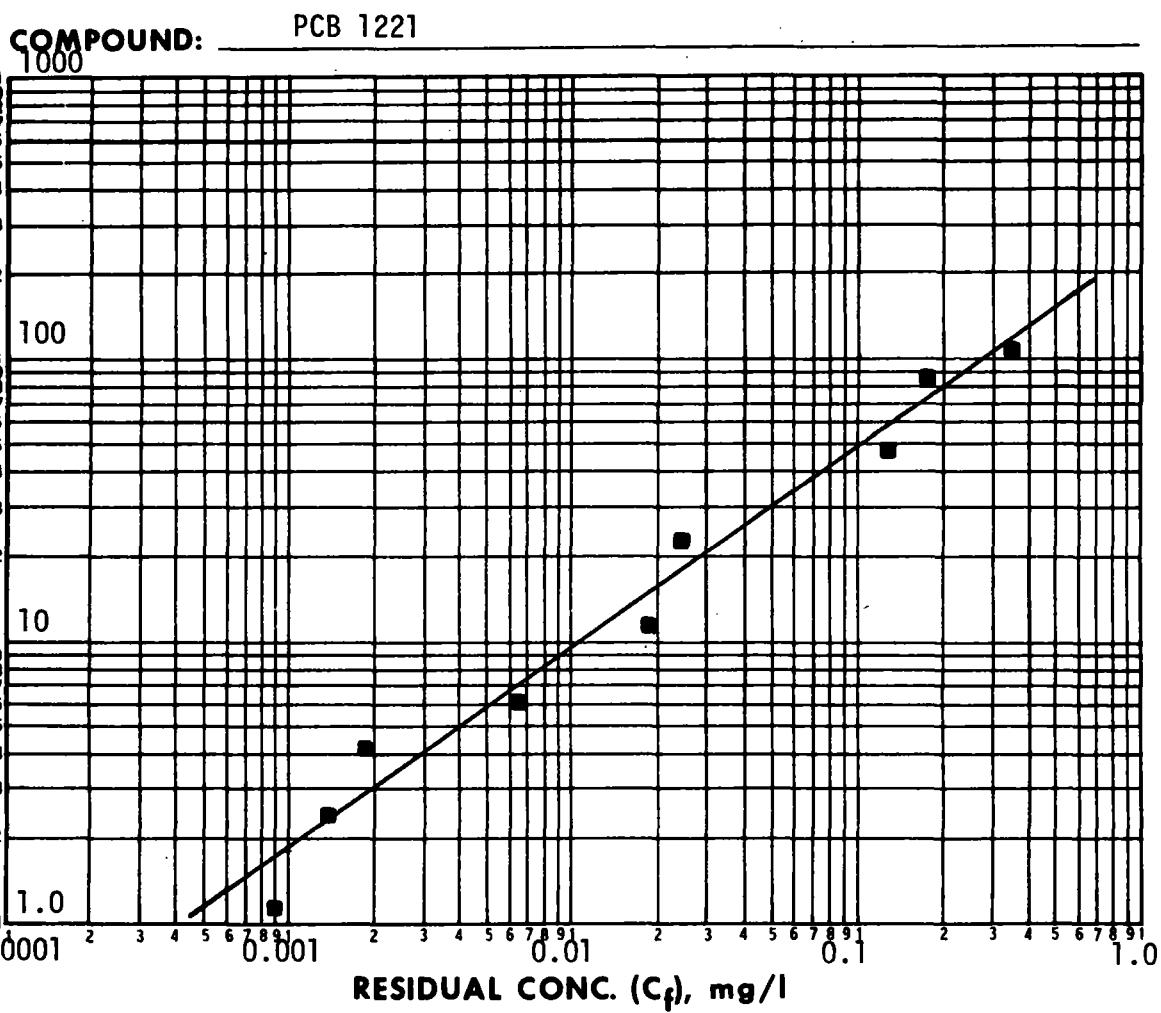

CARBON DOSE, mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.611								
2.5	0.341	0.270	108						
5	0.181	0.430	86.0						
10	0.127	0.484	48.4						
25	0.024	0.587	23.5						
50	0.019	0.592	11.8						
100	0.006	0.605	6.05						
150	0.002	0.609	4.06						
250	0.001	0.610	2.44						
500	0.001	0.610	1.22						

COMPOUND: PCB-1232

STRUCTURE:

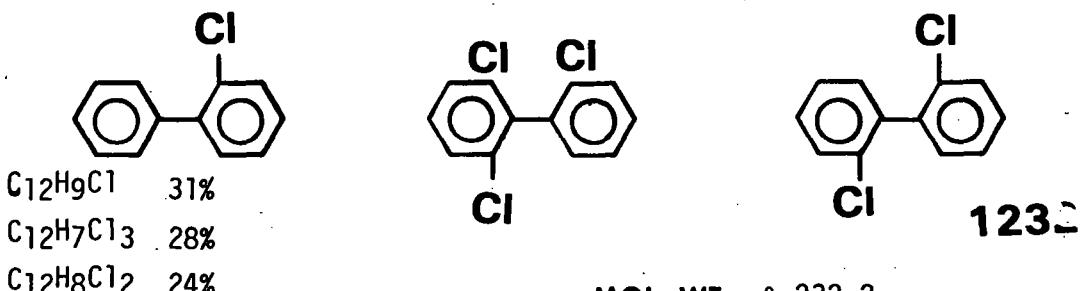FORMULA: C12H8Cl2 MOL. WT. ~ 232.2

FREUNDLICH PARAMETERS	pH		
K	630		
1/n	0.73		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	630		
0.1	120		
0.01	22		
0.001	4.0		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON			GRANULAR CARBON COLUMN
	C_f , mg/l		
C_0 , mg/l	0.1	0.01	0.001
1.0	7.7	45	240
0.1		4.1	24
0.01			2.2


C_0 , mg/l	
1.0	1.6
0.1	0.8
0.01	0.5

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent - extraction - G.C.

REMARKS: Structures shown are for major components.


COMPOUND: PCB - 1232

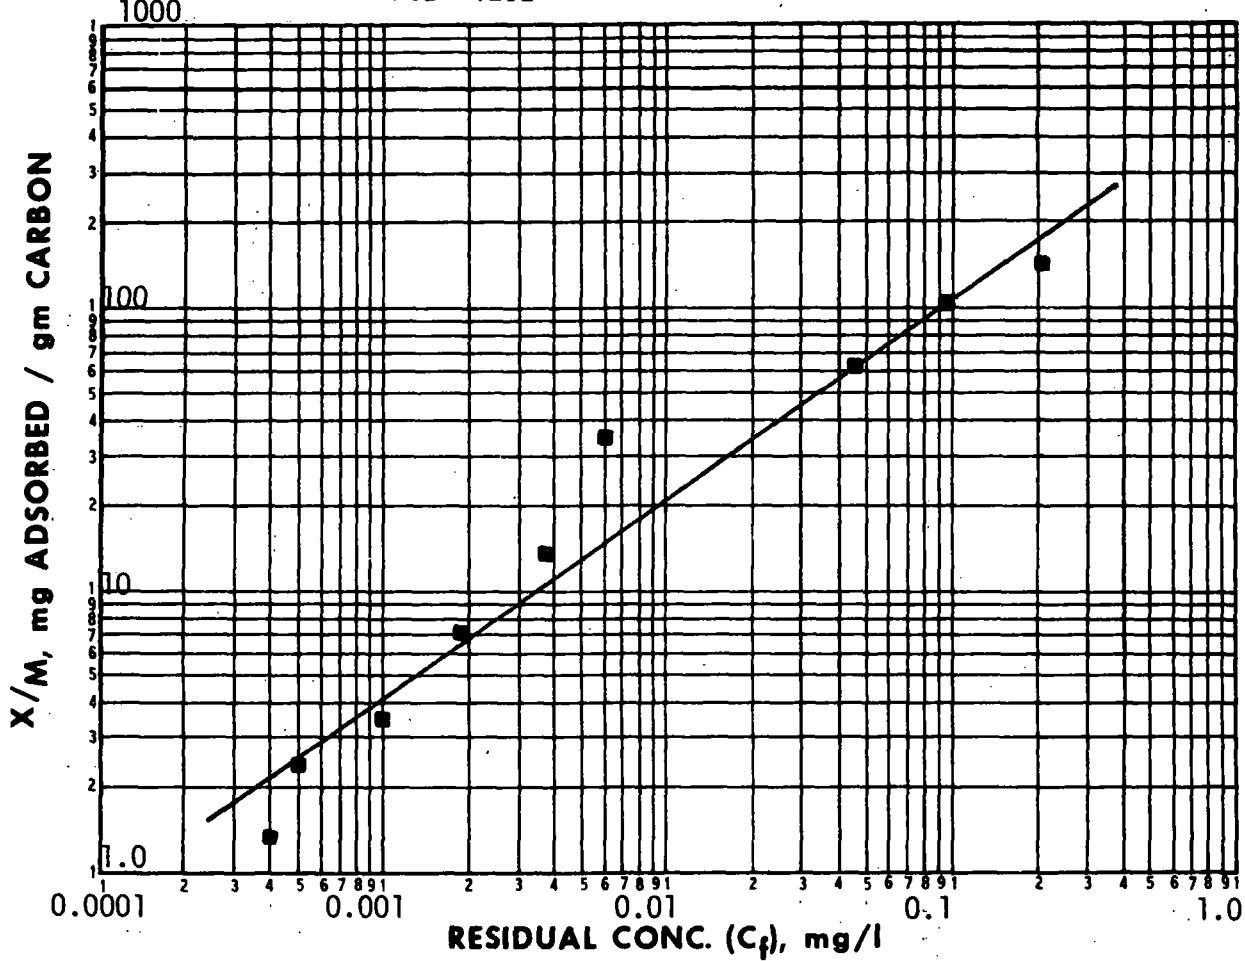

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.353								
1.0	0.206	0.147	147						
2.5	0.096	0.257	103						
5	0.046	0.307	61.4						
10	0.006	0.347	34.7						
25	0.004	0.349	13.9						
50	0.002	0.351	7.02						
100	0.001	0.352	3.52						
150	0.0005	0.352	2.35						
250	0.0004	0.353	1.41						
500	0.0001	0.353	0.71						

COMPOUND: Pentachlorophenol

STRUCTURE:



FORMULA: C_6HOCI_5 **MOL. WT.** 266.4

FREUNDLICH PARAMETERS	pH		
	3.0	7.0	9.0
K	260	150	100
1/n	0.39	0.42	0.41
Corr. Coef. r	0.98	0.98	0.98
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	630	380	260
1.0	260	150	100
0.1	110	55	39
0.01	44	21	15

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON		GRANULAR CARBON COLUMN	
C_f , mg/l		C_f , mg/l	
C_o , mg/l	0.1	0.01	0.001
1.0	16	47	130
0.1		4.3	12
0.01			1.1


C_o , mg/l	
1.0	6.9
0.1	1.8
0.01	0.5

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 247 nm, basic pH

REMARKS:

Pentachlorophenol
COMPOUND:

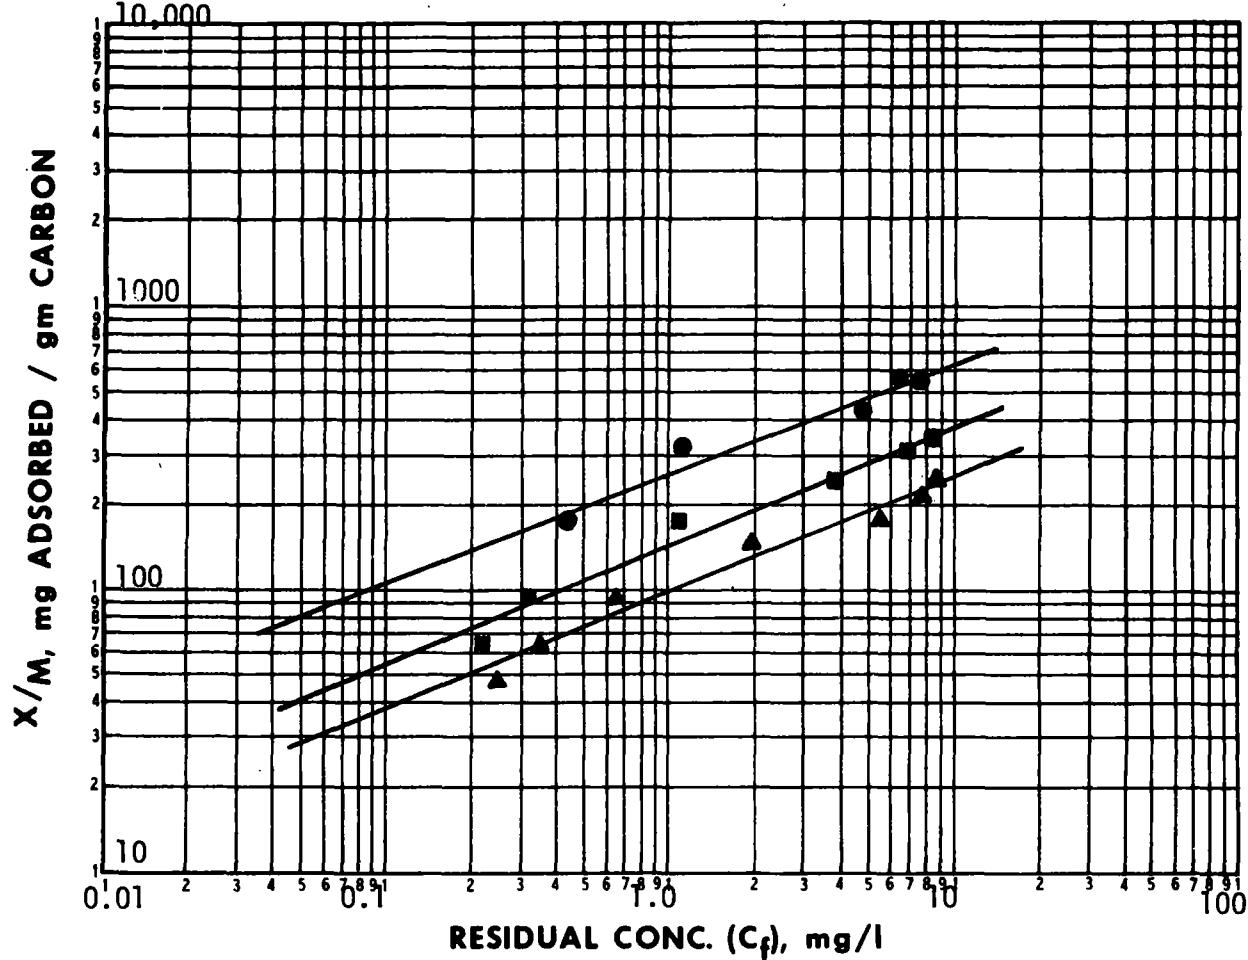

		$\bullet \text{ pH} = 3.0$			$\blacksquare \text{ pH} = 7.0$			$\blacktriangle \text{ pH} = 9.0$		
CARBON DOSE mg/l		C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
pH 3	pH 7									
only	pH 9									
0	0	9.23			9.23			9.95		
2.5	5	7.82	1.41	564	8.18	1.75	350	8.70	1.25	250
5	10	6.37	2.86	572	6.85	3.08	308	7.79	2.16	216
10	25	4.90	4.33	433	3.77	6.16	246	5.42	4.53	181
25	50	1.20	8.03	321	1.09	8.84	177	1.95	8.00	160
50	100	0.44	8.79	176	0.31	9.62	96	0.63	9.32	93
100	150				0.22	9.71	65	0.34	9.61	64
150	200							0.24	9.71	49

COMPOUND: Phenanthrene

STRUCTURE:



FORMULA: C₁₄H₁₀

MOL. WT. 178.24

FREUNDLICH PARAMETERS	pH		
	5.3		
K	215		
1/n	0.44		
Corr. Coef. r	0.98		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	215		
0.1	78		
0.01	29		
0.001	10		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

C_f, mg/l

C _o , mg/l	0.1	0.01	0.001
1.0	11	34	95
0.1		3.1	9.4
0.01			0.9

GRANULAR CARBON COLUMN


C _o , mg/l	
1.0	4.7
0.1	1.3
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Solvent Extraction - G.C.

REMARKS:

COMPOUND: Phenanthrene

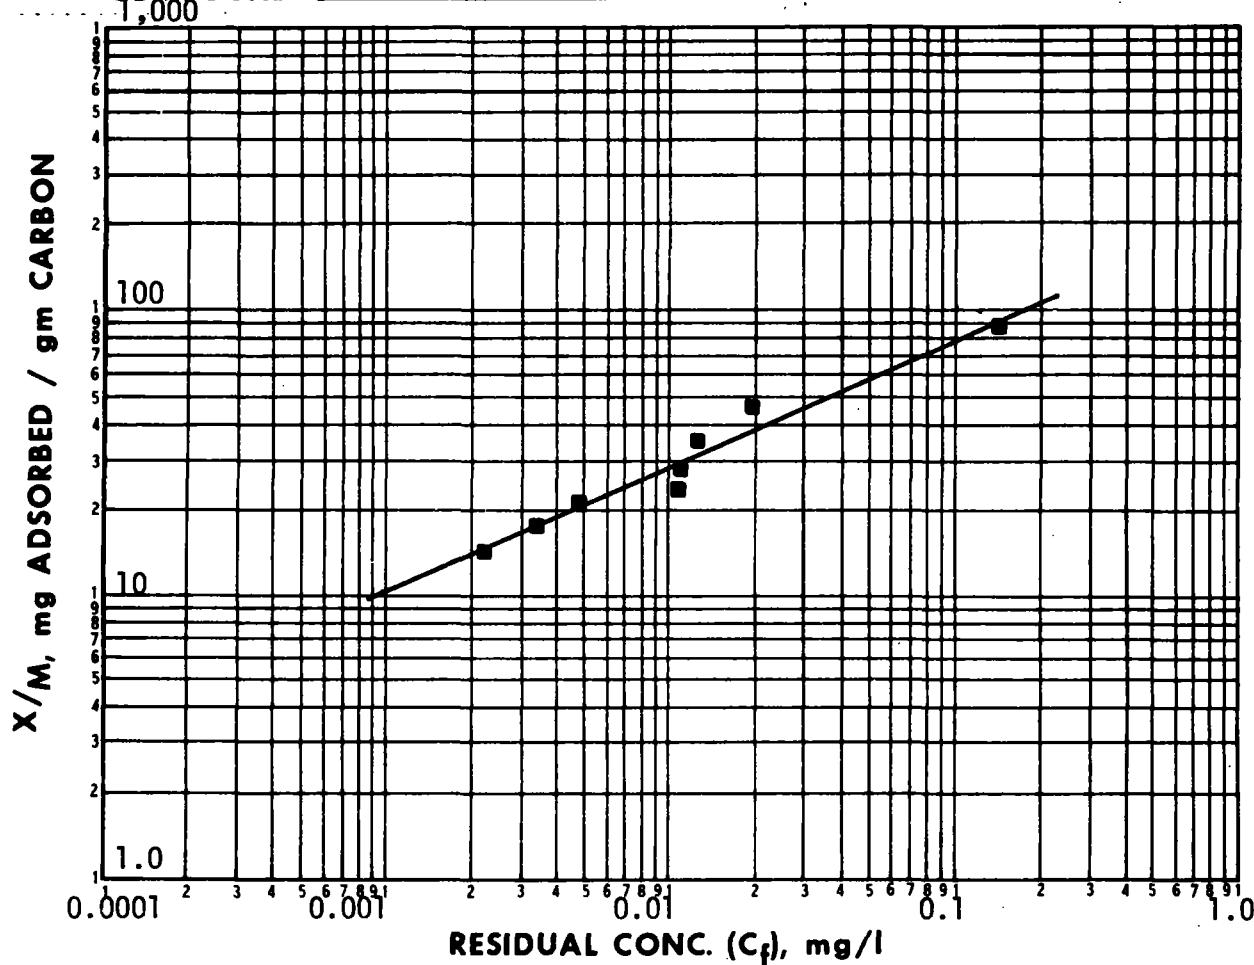

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	0.370								
2.5	0.147	0.223	89.2						
7.5	0.196	0.350	46.7						
10	0.0133	0.357	35.7						
12.5	0.0112	0.359	28.7						
15	0.0108	0.359	23.9						
17.5	0.0049	0.365	20.9						
20	0.0033	0.367	18.3						
25	0.0022	0.368	14.7						

COMPOUND: Phenol

STRUCTURE:



FORMULA: C_6H_6O **MOL. WT.** 94.11

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	21		
1/n	0.54		
Corr. Coef. r	0.89		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	74		
1.0	21		
0.1	6.0		
0.01	1.7		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON **GRANULAR CARBON COLUMN**
 C_f , mg/l

C_0 , mg/l	0.1	0.01	0.001
1.0	150	570	2,000
0.1		52	200
0.01			18


C_0 , mg/l	
1.0	47
0.1	17
0.01	5.8

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 288 nm

REMARKS:


COMPOUND: Phenol

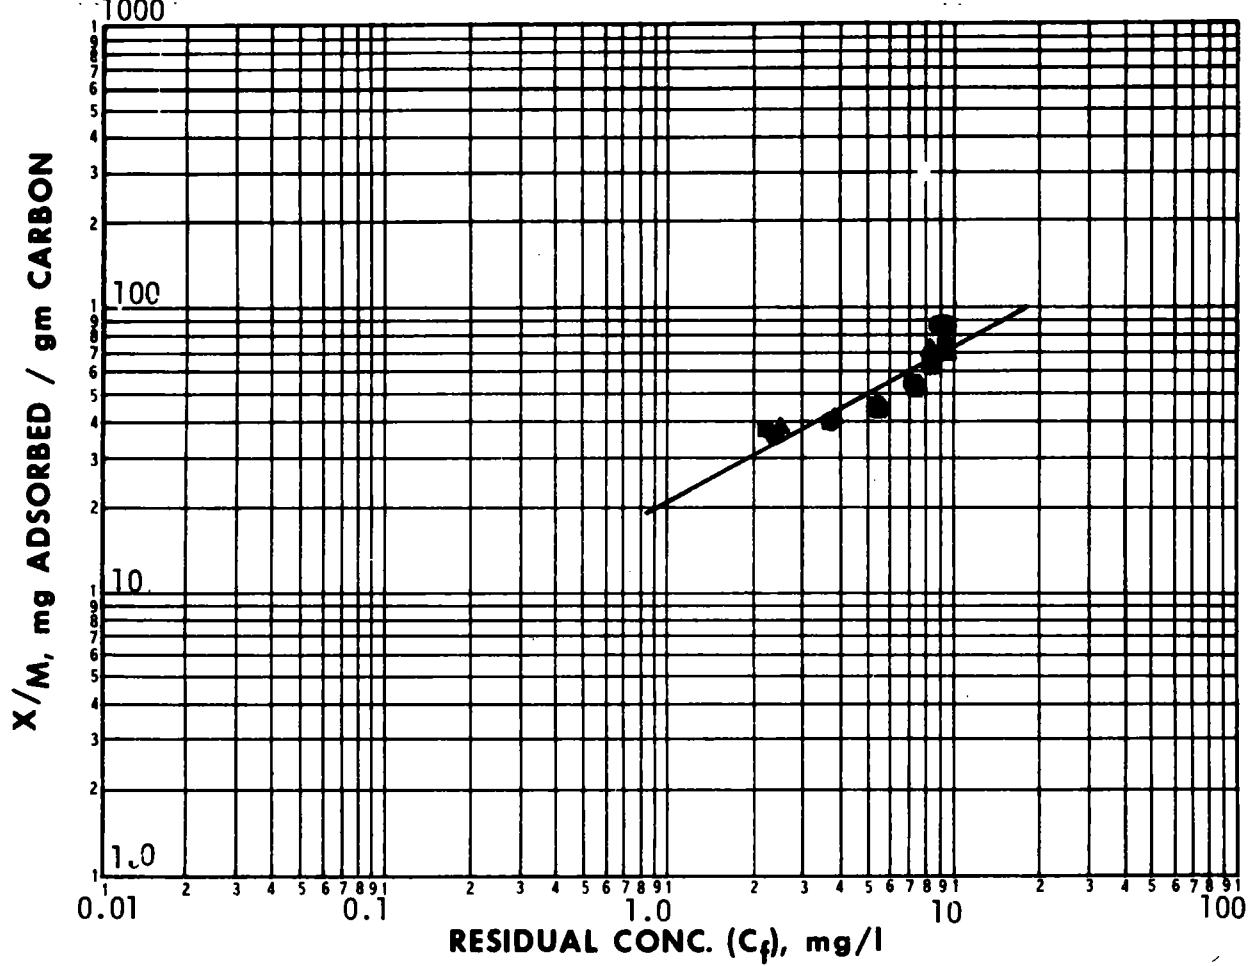

CARBON DOSE mg/l	$\bullet \text{ pH}=3.0$			$\blacksquare \text{ pH}=7.0$			$\blacktriangle \text{ pH}=9.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	9.84			9.80			9.96		
5	9.40	0.44	88	9.36	0.44	88			
10	8.96	0.88	88	9.06	0.74	74	9.26	0.70	70
25	8.27	1.57	63	8.24	1.56	62	8.17	1.79	72
50	7.12	2.72	54	7.24	2.56	51	7.26	2.70	54
100	5.27	4.57	46	5.36	4.44	44	5.27	4.69	47
150	3.80	6.04	40	3.74	6.06	40	3.75	6.21	41
200	2.35	7.49	37	2.15	7.65	38	2.45	7.51	38

COMPOUND: Phenylmercuric acetate

STRUCTURE:

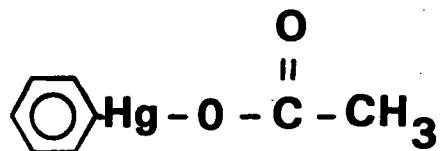

FORMULA: $\text{C}_8\text{H}_8\text{HgO}_2$ **MOL. WT.** 336.74

FREUNDLICH PARAMETERS	pH	
	3.0 and 7.0 pooled	9.0
K	270	130
1/n	0.44	0.54
Corr. Coef. r	0.99	0.99
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm	
10	740	440
1.0	270	130
0.1	97	37
0.01	35	11

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	9.2	28	77
0.1		2.5	7.7
0.01.			0.70

GRANULAR CARBON COLUMN


C_o , mg/l
1.0
0.1
0.01

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Atomic Adsorption: Hg

REMARKS:


COMPOUND: Phenylmercuric acetate

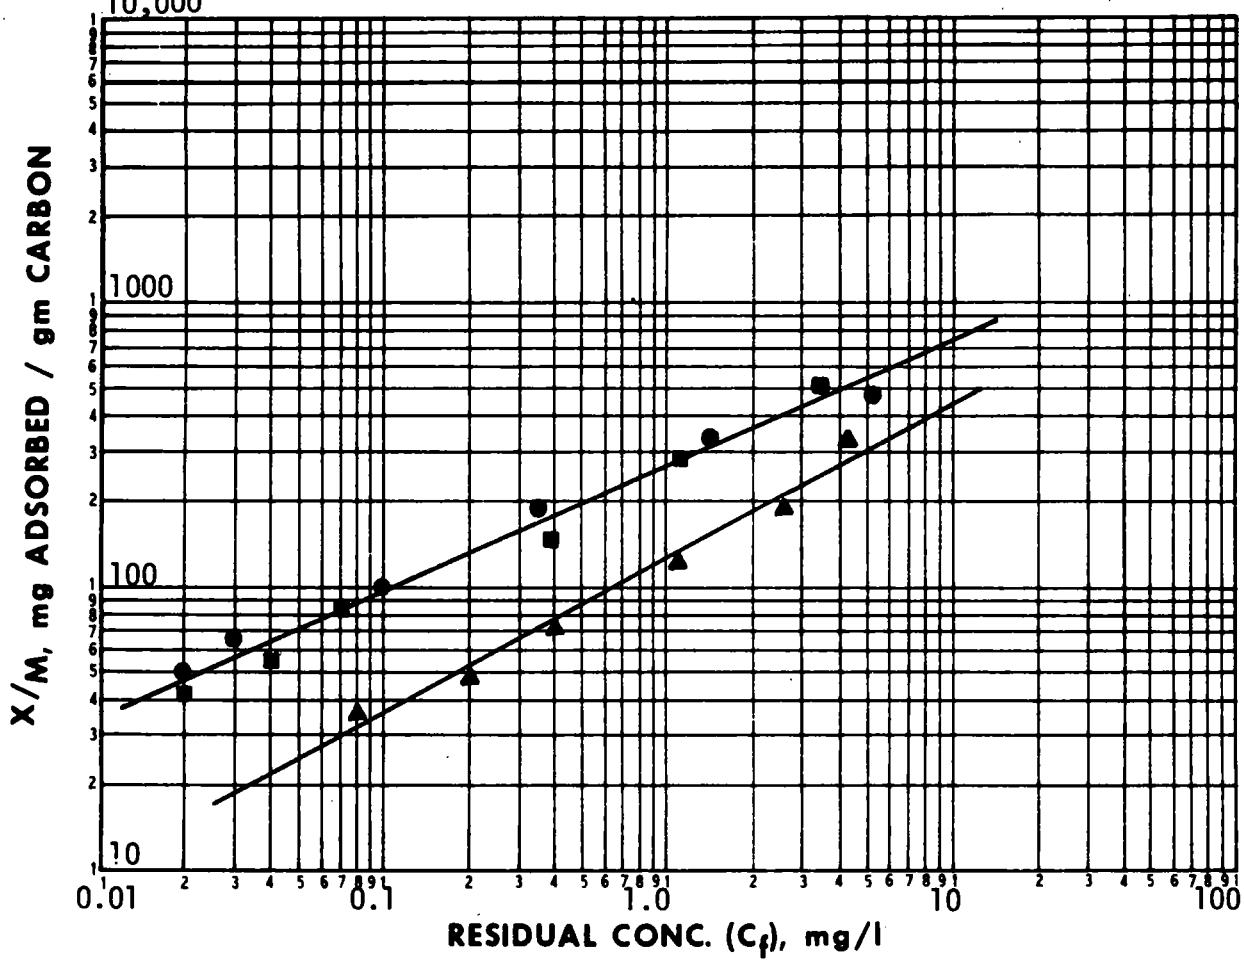

CARBON DOSE mg/l	$\bullet \text{ pH} = 3.0$			$\blacksquare \text{ pH} = 7.0$			$\blacktriangle \text{ pH} = 9.0$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	10.1			8.39			7.55		
10	5.20	4.90	490	3.36	5.03	503	4.20	3.35	335
25	1.61	8.49	340	1.18	7.21	288	2.69	4.86	194
50	0.37	9.73	195	0.39	8.00	160	1.14	6.41	128
100	0.10	10.00	100	0.07	8.32	83.2	0.40	7.15	71.5
150	0.03	10.07	67	0.04	8.35	55.6	0.20	7.35	49
200	0.02	10.08	50	0.02	8.37	41.9	0.08	7.47	37.4

COMPOUND: Styrene

STRUCTURE:



FORMULA: C₈H₈ **MOL. WT.** 104.14

FREUNDLICH PARAMETERS	pH	
	All data pooled	
K	120	
1/n	0.56	
Corr. Coef. r	0.98	
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm	
10	440	
1.0	120	
0.1	33	
0.01	9.0	

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
C_f, mg/l


C _o , mg/l	SINGLE STAGE POWDERED CARBON			GRANULAR CARBON COLUMN	
	0.1	0.01	0.001	C _o , mg/l	
1.0	27	110	400	1.0	8.3
0.1		9.8	39	0.1	3.0
0.01			3.6	0.01	1.1

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 245 nm

REMARKS:


COMPOUND: Styrene

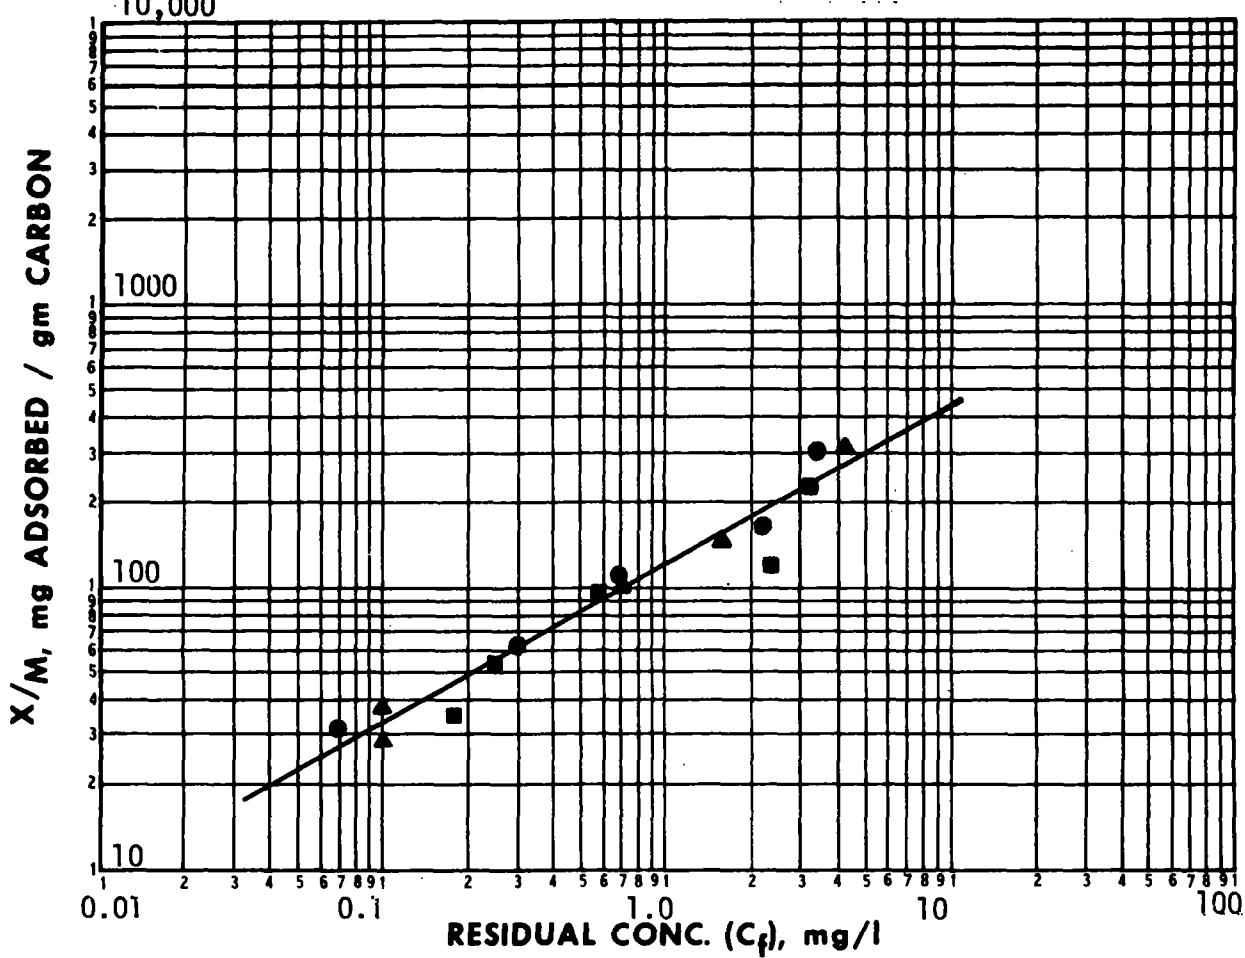

CARBON DOSE mg/l	\bullet pH = 3.0			\blacksquare pH = 7.0			\blacktriangle pH = 9.0		
	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M
0	6.45			5.50			5.75		
5							4.17	1.58	316
10	3.43	3.02	302	3.20	2.30	230			
25	2.25	4.20	168	2.30	3.20	128	1.70	4.05	162
50	0.70	5.75	115	0.58	4.92	98	0.70	5.05	101
100	0.30	6.15	62	0.25	5.25	53			
150				0.18	5.32	36	0.10	5.65	38
200	0.07	6.38	31				0.10	5.65	29

COMPOUND: 1,1,2,2-Tetrachloroethane

STRUCTURE:



FORMULA: C₂H₂Cl₄ MOL. WT. 167.85

FREUNDLICH PARAMETERS	pH		
	5.3		
K	10.6		
1/n	0.37		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	11		
0.1	4.5		
0.01	1.9		
0.001	0.8		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.1	0.001
1.0	200	510	1200
0.1		50	120
0.01			11


C_o , mg/l	
1.0	90
0.1	22
0.01	5.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G.C. Purge and Trap


REMARKS:

COMPOUND: 1,1,2,2-Tetrachloroethane

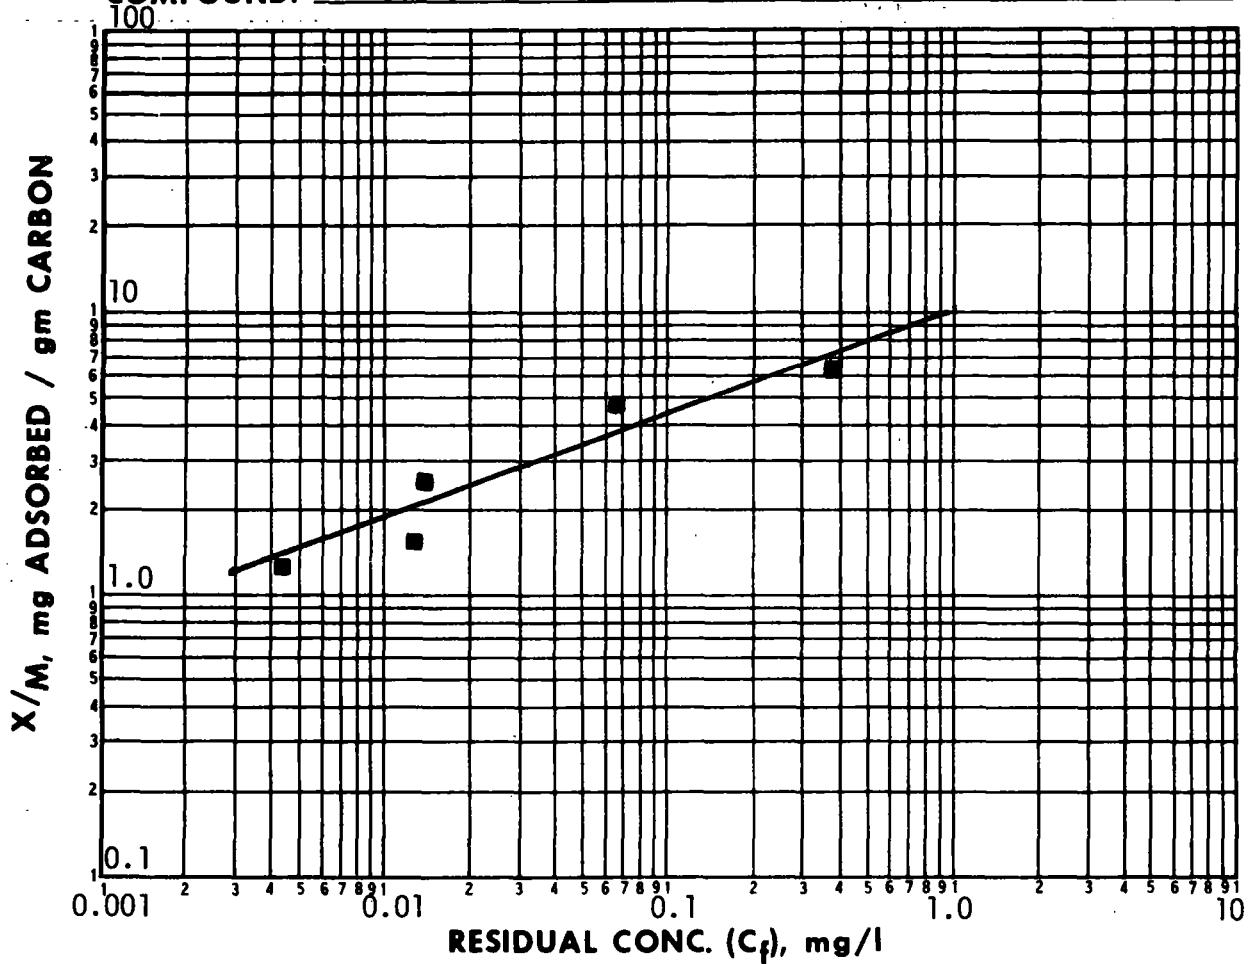

COMPOUND: Tetrachloroethene (Tetrachloroethylene)

STRUCTURE:



FORMULA: C₂Cl₄ **MOL. WT.** 165.83

FREUNDLICH PARAMETERS	pH		
	5.3		
K	50.8		
1/n	0.56		
Corr. Coef. r	0.96		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	51		
0.1	14.0		
0.01	3.9		
0.001	1.1		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	64	260	940
0.1		23	93
0.01			8.5


C ₀ , mg/l	
1.0	20
0.1	7.1
0.01	2.6

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G.C. Purge and Trap

REMARKS:


COMPOUND: Tetrachloroethene (Tetrachloroethylene)

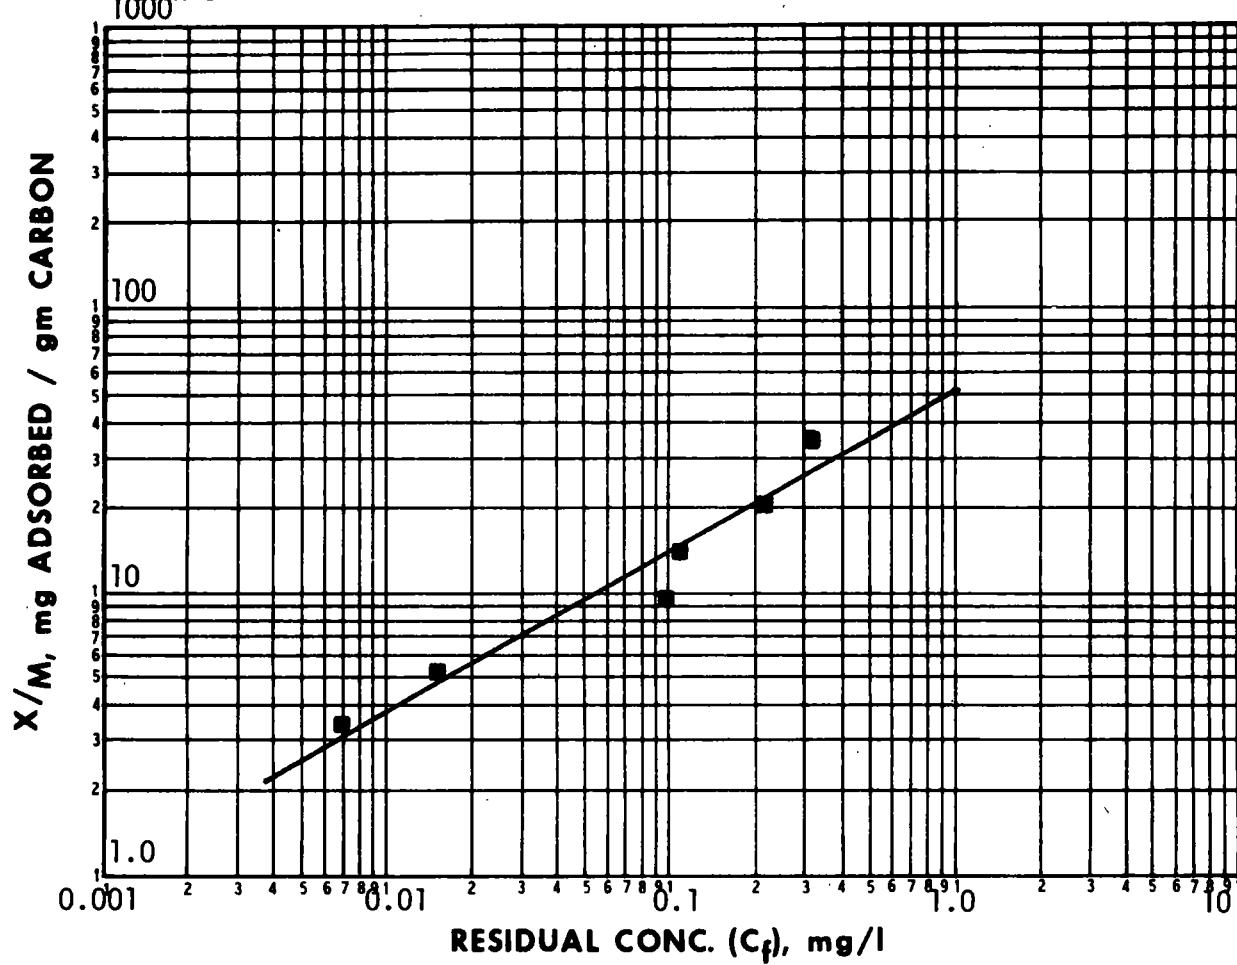

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.000								
19	0.313	0.687	35.8						
38	0.213	0.787	20.4						
58	0.114	0.886	15.4						
96	0.100	0.900	9.36						
192	0.016	0.984	5.12						
288	0.007	0.993	3.44						

COMPOUND: 1,2,3,4 - Tetrahydronaphthalene

STRUCTURE:



FORMULA: $C_{10}H_{12}$

MOL. WT. 132.21

FREUNDLICH PARAMETERS	pH		
	7.4		
K	74		
1/n	0.81		
Corr. Coef. r	0.97		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	480		
1.0	74		
0.1	11		
0.01	1.7		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	78	560	3,600
0.1		51	360
0.01			33


C_o , mg/l	
1.0	14
0.1	8.8
0.01	5.7

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 264 nm

REMARKS:


COMPOUND: 1,2,3,4 - Tetrahydronaphthalene

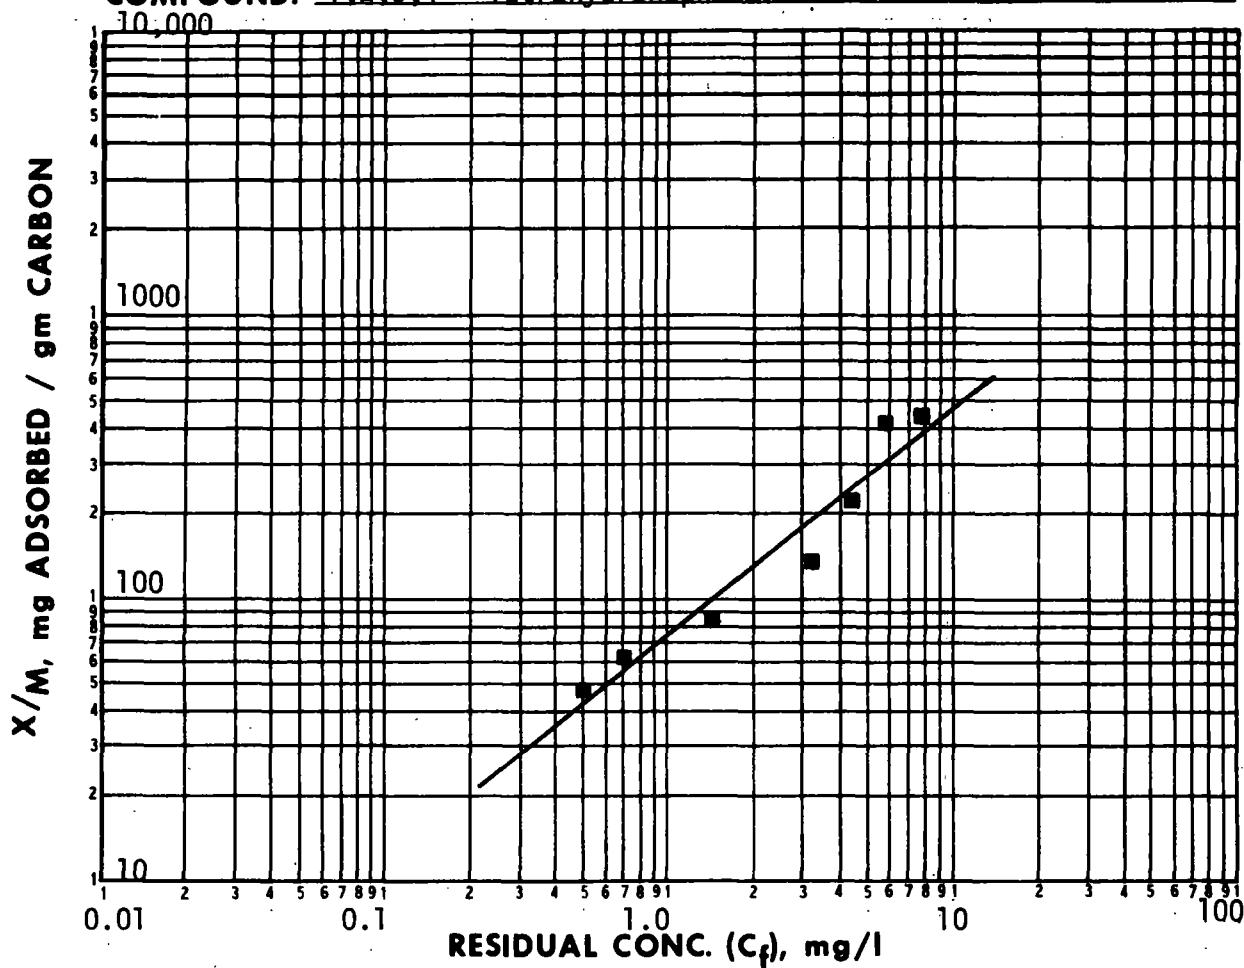

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 7.36$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	10.00								
5	7.8	2.20	440						
10	5.9	4.10	410						
25	4.3	5.70	228						
50	3.2	6.80	136						
100	1.5	8.50	85						
150	0.70	9.30	62						
200	0.50	9.50	47.5						

COMPOUND: Thymine

STRUCTURE:



FORMULA: C₅H₆N₂O₂ **MOL. WT.** 126.11

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	27		
1/n	0.51		
Corr. Coef. r	0.91		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
10	89		
1.0	27		
0.1	8.5		
0.01	2.6		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	110	380	1200
0.1		34	120
0.01			11

GRANULAR CARBON COLUMN


C ₀ , mg/l	
1.0	36
0.1	12
0.01	3.8

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 264 nm

REMARKS:


COMPOUND: Thymine

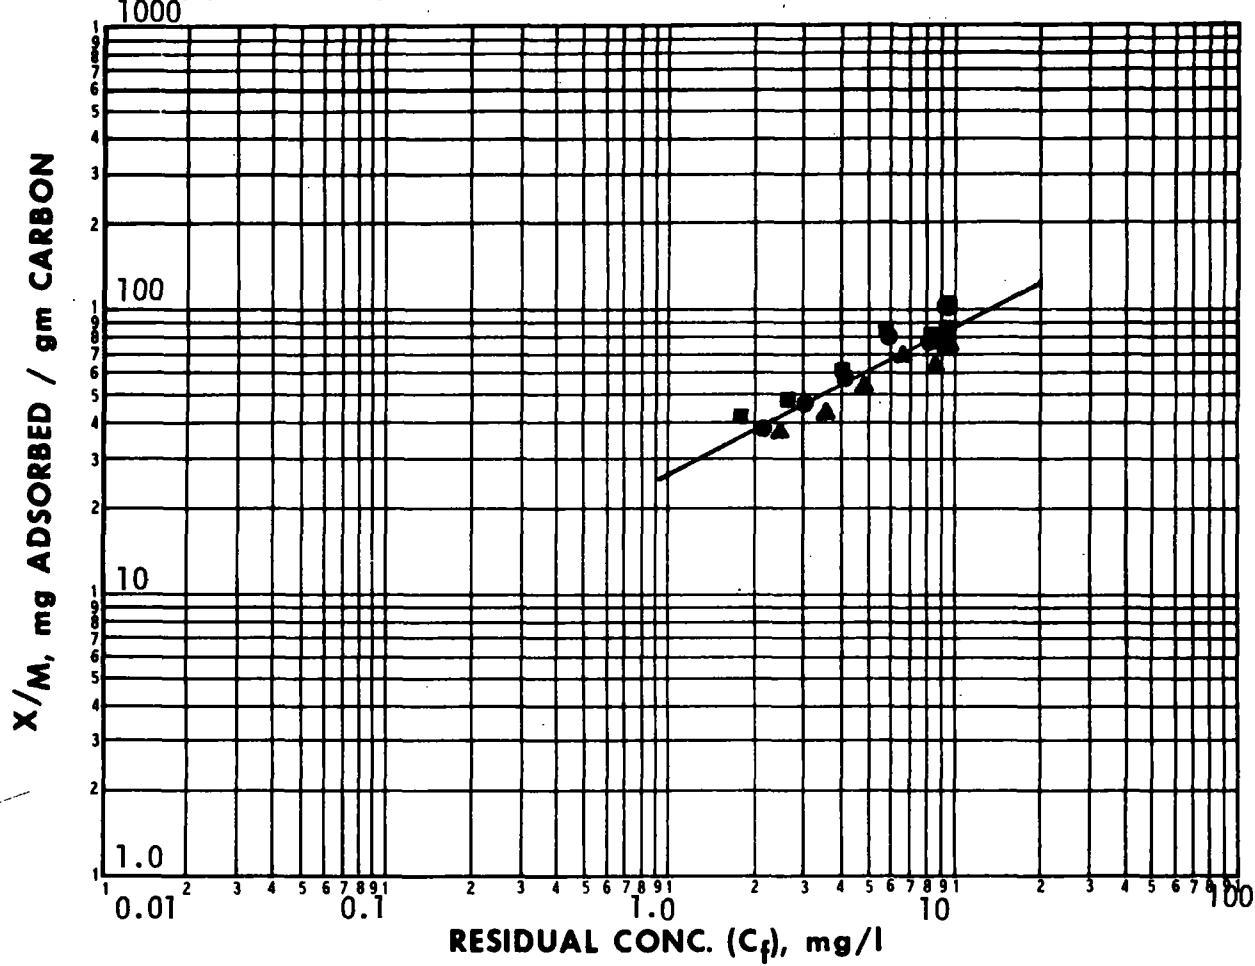

CARBON DOSE mg/l	\bullet pH = 3.0			\blacksquare pH = 7.0			\blacktriangle pH = 9.0		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	10.05			10.10			10.07		
5	9.54	0.51	102	9.58	0.52	104	9.68	0.39	78
10	9.28	0.77	77	9.21	0.89	89	9.31	0.76	76
25	8.07	1.98	79	8.08	2.02	81	8.48	1.59	64
50	6.03	4.02	80	5.82	4.28	86	6.59	3.48	70
100	4.22	5.83	58	3.96	6.14	61	4.75	5.32	53
150	3.04	7.01	47	2.72	7.38	49	3.56	6.51	43
200	2.19	7.86	39	1.77	8.33	42	2.51	7.56	38

COMPOUND: Toluene

STRUCTURE:



FORMULA: C₇H₈ **MOL. WT.** 92.14

FREUNDLICH PARAMETERS	pH		
	5.6		
K	26.1		
1/n	0.44		
Corr. Coef. r	0.89		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	26		
0.1	9.4		
0.01	3.4		
0.001	1.2		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	96	290	820
0.1		27	81
0.01			7.4


C ₀ , mg/l	
1.0	38
0.1	11
0.01	2.9

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 208.8 nm.

REMARKS:


COMPOUND: Toluene

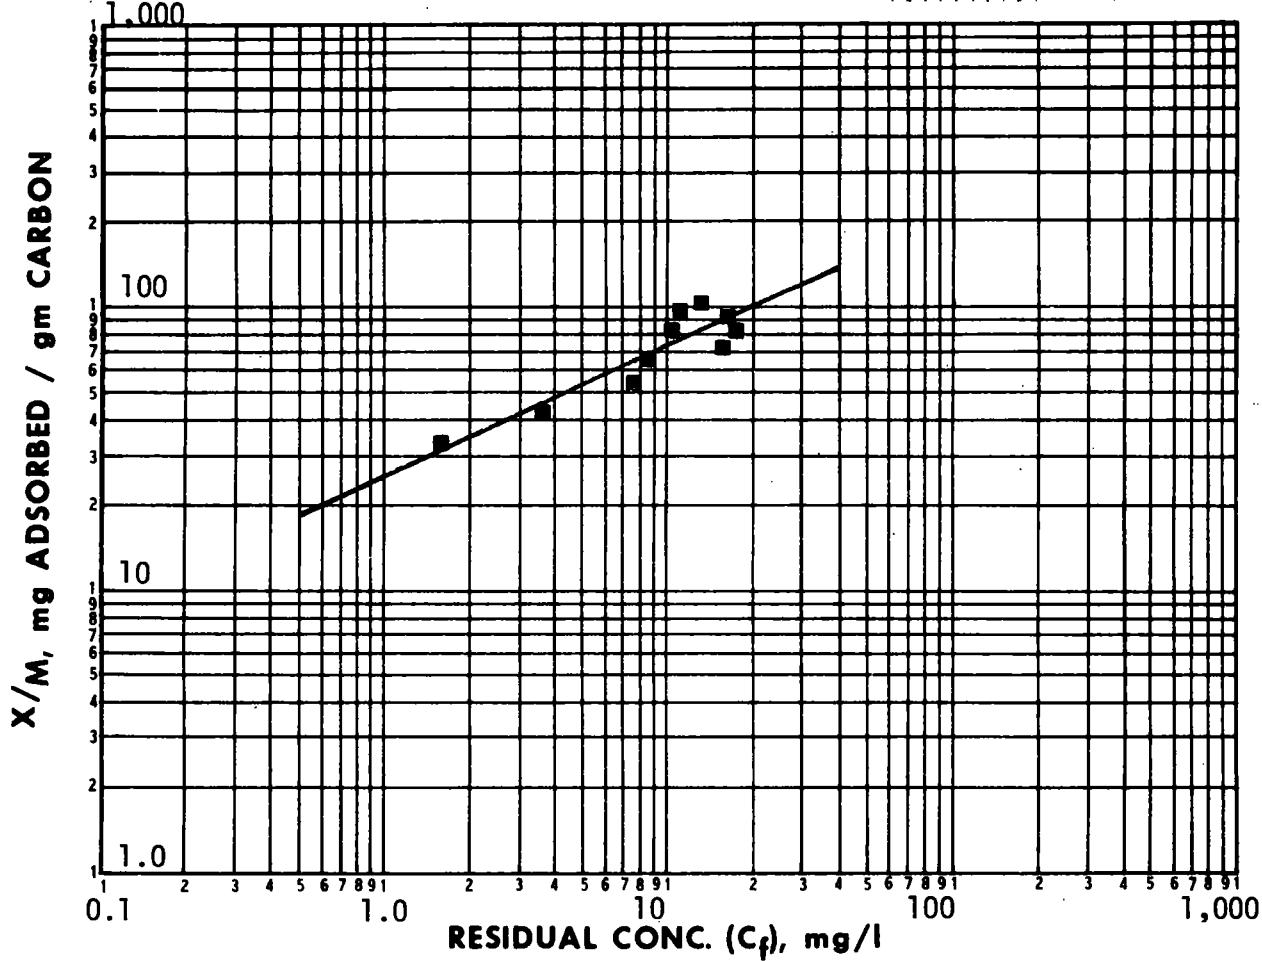

CARBON DOSE mg/l	■ pH = 5.6			pH =			pH =		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	18.48								
5	18.07	0.41	82						
10	17.56	0.92	92						
25	16.70	1.78	71.2						
50	13.20	5.28	105.6						
75	11.00	7.48	99.7						
100	10.33	8.15	81.5						
150	8.36	10.12	67.5						
200	7.65	10.83	54.2						
350	3.67	14.81	42.3						
500	1.71	16.77	33.5						

COMPOUND: 1,2,4-Trichlorobenzene

STRUCTURE:



FORMULA: C₆H₃Cl₃ **MOL. WT.** 181.45

FREUNDLICH PARAMETERS	pH		
	5.3		
K	157		
1/n	0.31		
Corr. Coef. r	0.84		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	157		
0.1	77.6		
0.01	38.4		
0.001	19.0		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON
C_f, mg/l

GRANULAR CARBON COLUMN

C ₀ , mg/l	0.1	0.01	0.001
1.0	12	26	52
0.1		2.3	5.2
0.01			0.5


C ₀ , mg/l	
1.0	6.4
0.1	1.3
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 226.5 nm.

REMARKS:


COMPOUND: 1,2,4-Trichlorobenzene

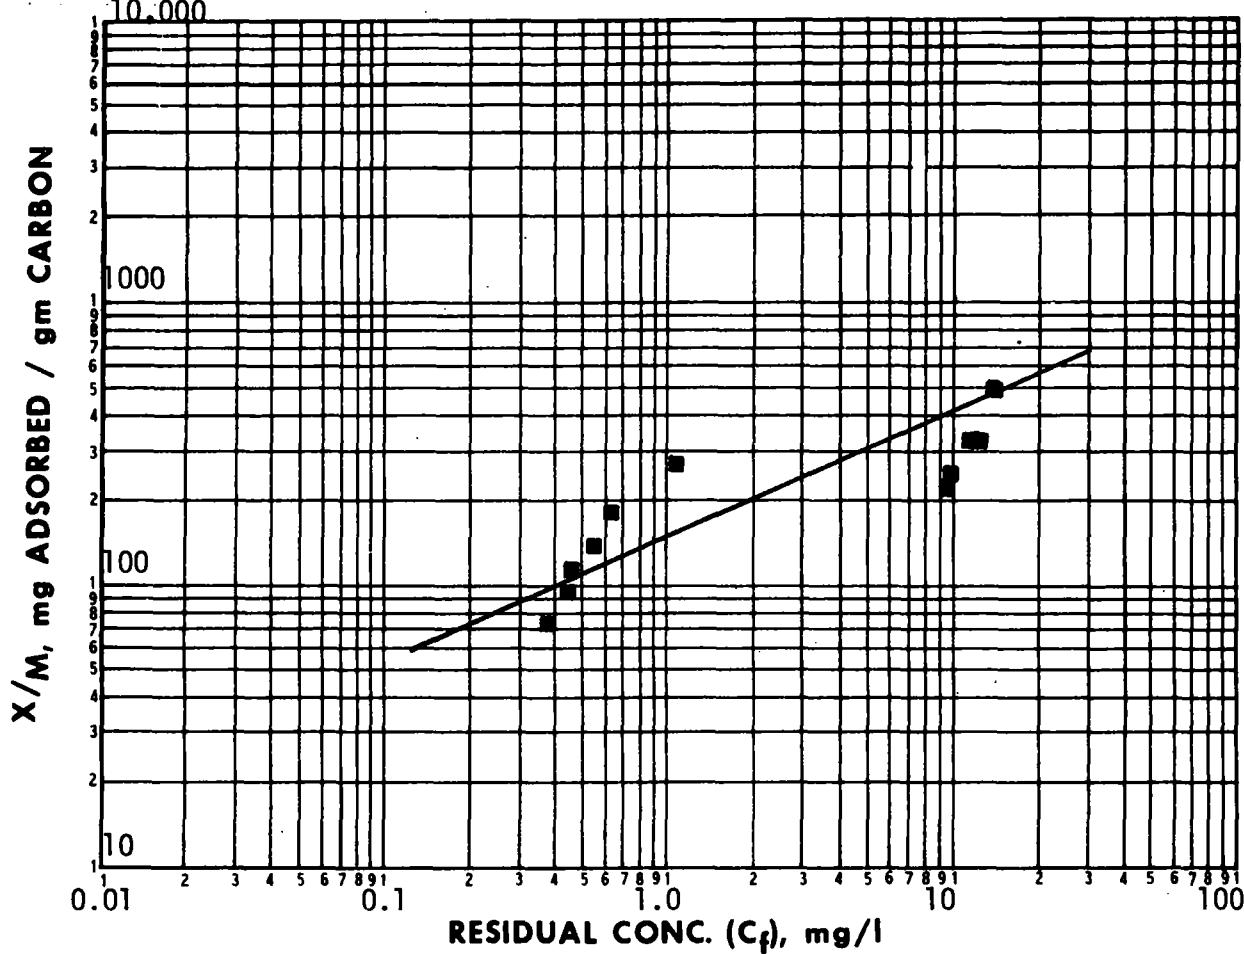

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	15.01								
2.5	13.76	1.25	500						
5	13.43	1.58	316						
10	11.76	3.25	325						
20	9.82	5.19	260						
25	9.36	5.65	226						
50	1.10	13.91	278						
75	0.62	14.39	192						
100	0.53	14.48	145						
125	0.46	14.55	116						
150	0.43	14.58	97.2						
200	0.38	14.63	73.2						

COMPOUND: 1,1,1-Trichloroethane

STRUCTURE:



FORMULA: C₂H₃Cl₃

MOL. WT. 133.41

FREUNDLICH PARAMETERS	pH		
	5.3		
K	2.48		
1/n	0.34		
Corr. Coef. r	0.97		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	2.5		
0.1	1.1		
0.01	0.51		
0.001	0.23		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	800	1,900	4,300
0.1		180	430
0.01			39


C ₀ , mg/l
1.0
0.1
0.01

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. - Purge and Trap

REMARKS:


COMPOUND: 1,1,1-Trichloroethane

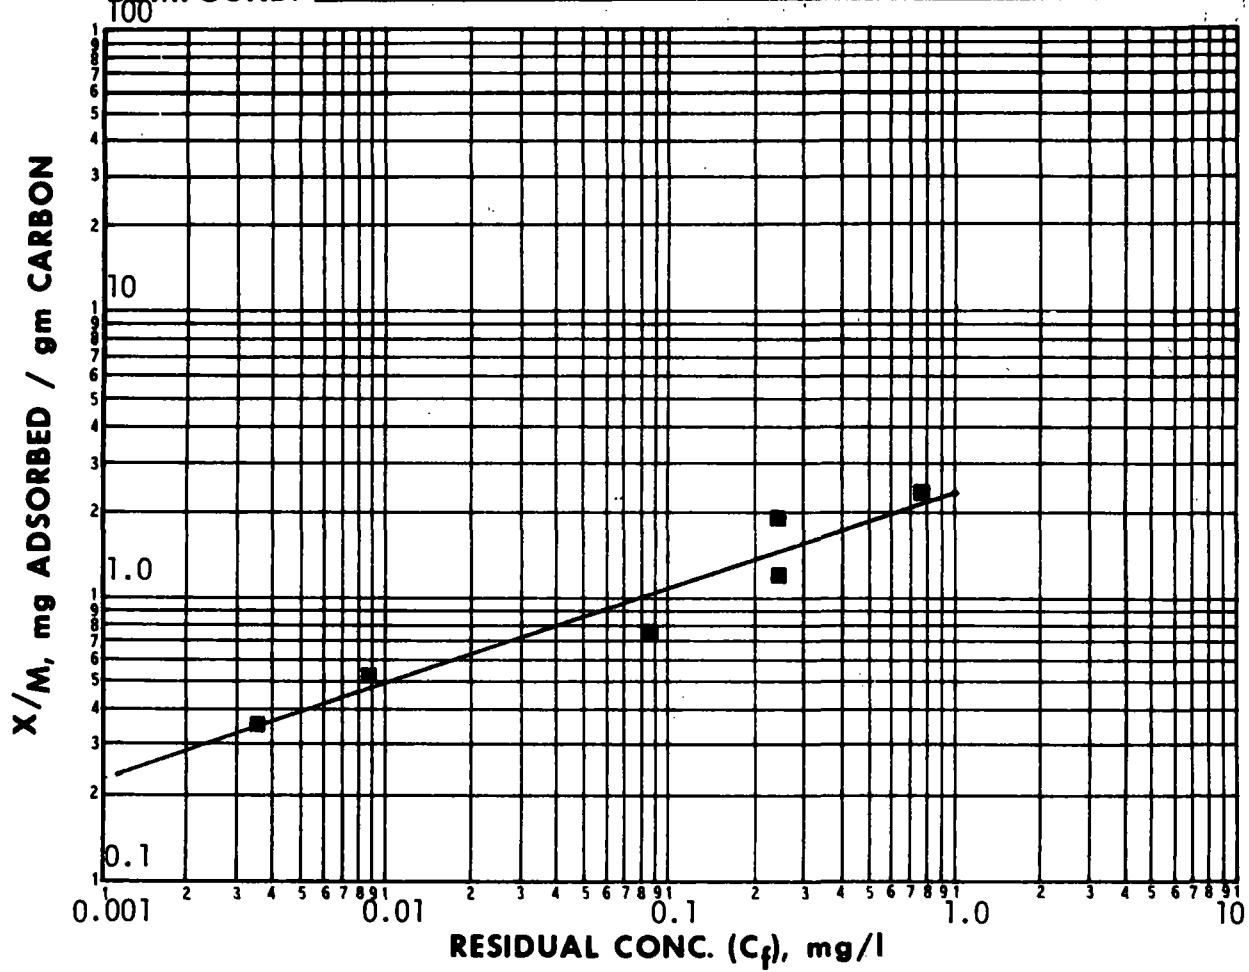

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.000								
96	0.768	0.232	2.41						
385	0.240	0.760	1.97						
577	0.238	0.762	1.32						
1154	0.084	0.916	0.794						
1923	0.0087	0.991	0.516						
2692	0.0035	0.9965	0.370						

COMPOUND: 1,1,2-Trichloroethane

STRUCTURE:



FORMULA: C₂H₃Cl₃ MOL. WT. 133.41

FREUNDLICH PARAMETERS	pH		
	5.3		
K	5.81		
1/n	0.60		
Corr. Coef. r	0.97		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	5.8		
0.1	1.4		
0.01	0.36		
0.001	0.09		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	620	2,700	11,000
0.1		250	1,100
0.01			99


C ₀ , mg/l	
1.0	170
0.1	69
0.01	28

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G.C. Purge and Trap

REMARKS:


COMPOUND: 1,1,2-Trichloroethane

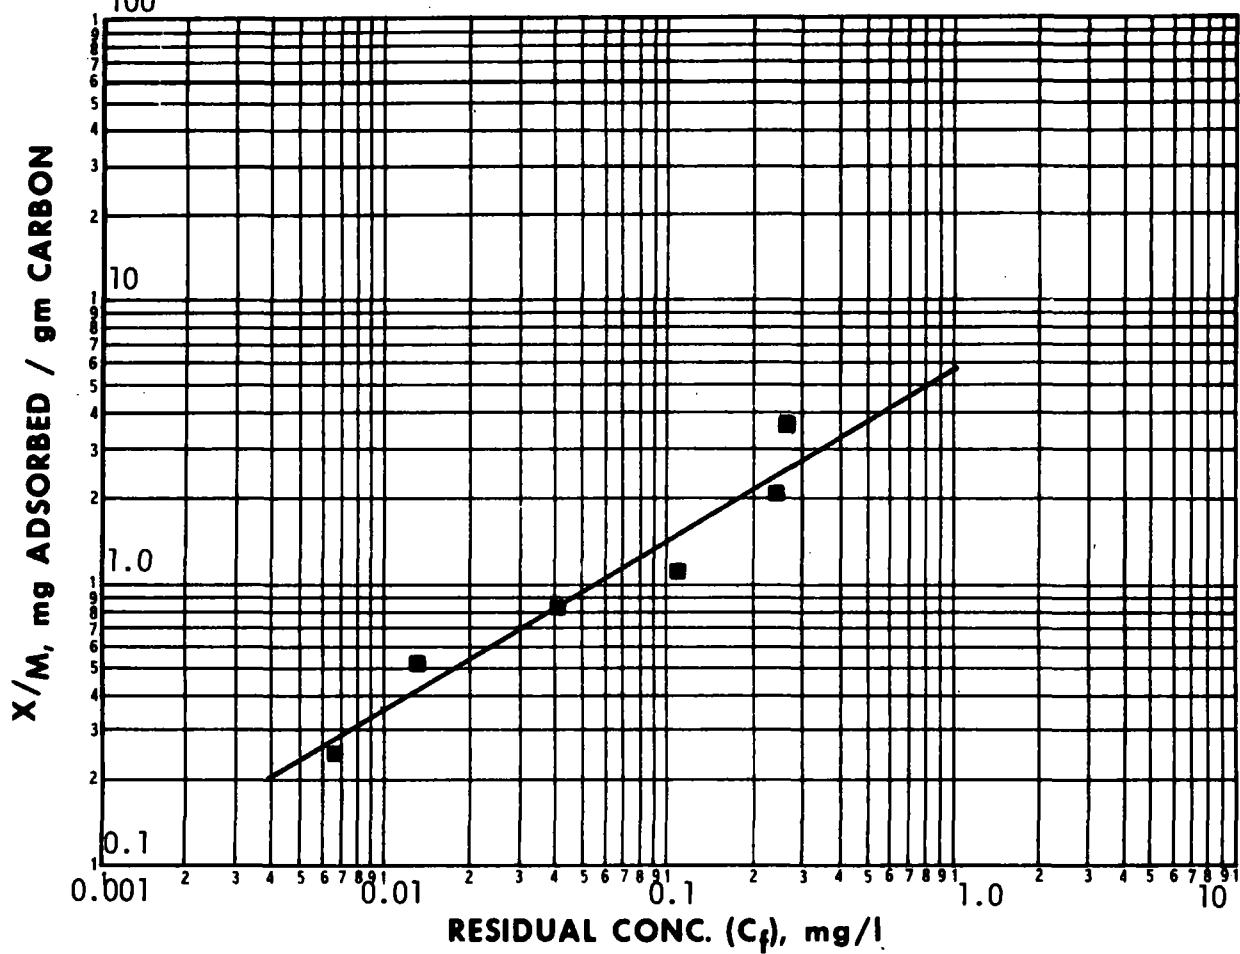

CARBON DOSE mg/l	$\text{pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M
0	1.000								
192	0.271	0.729	3.79						
385	0.230	0.770	2.00						
769	0.110	0.890	1.16						
1154	0.041	0.959	0.831						
1923	0.013	0.987	0.513						
3846	0.006	0.994	0.258						

COMPOUND: Trichloroethene (Trichloroethylene) ...

STRUCTURE:



FORMULA: C_2HCl_3 **MOL. WT.** 131.39

FREUNDLICH PARAMETERS	pH		
	5.3		
K	28.0		
1/n	0.62		
Corr. Coef. r	0.99		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	28		
0.1	6.7		
0.01	1.6		
0.001	0.38		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	130	620	2,600
0.1		56	260
0.01			23


C_o , mg/l	
1.0	36
0.1	15
0.01	6.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:


COMPOUND: Trichloroethene (Trichloroethylene)

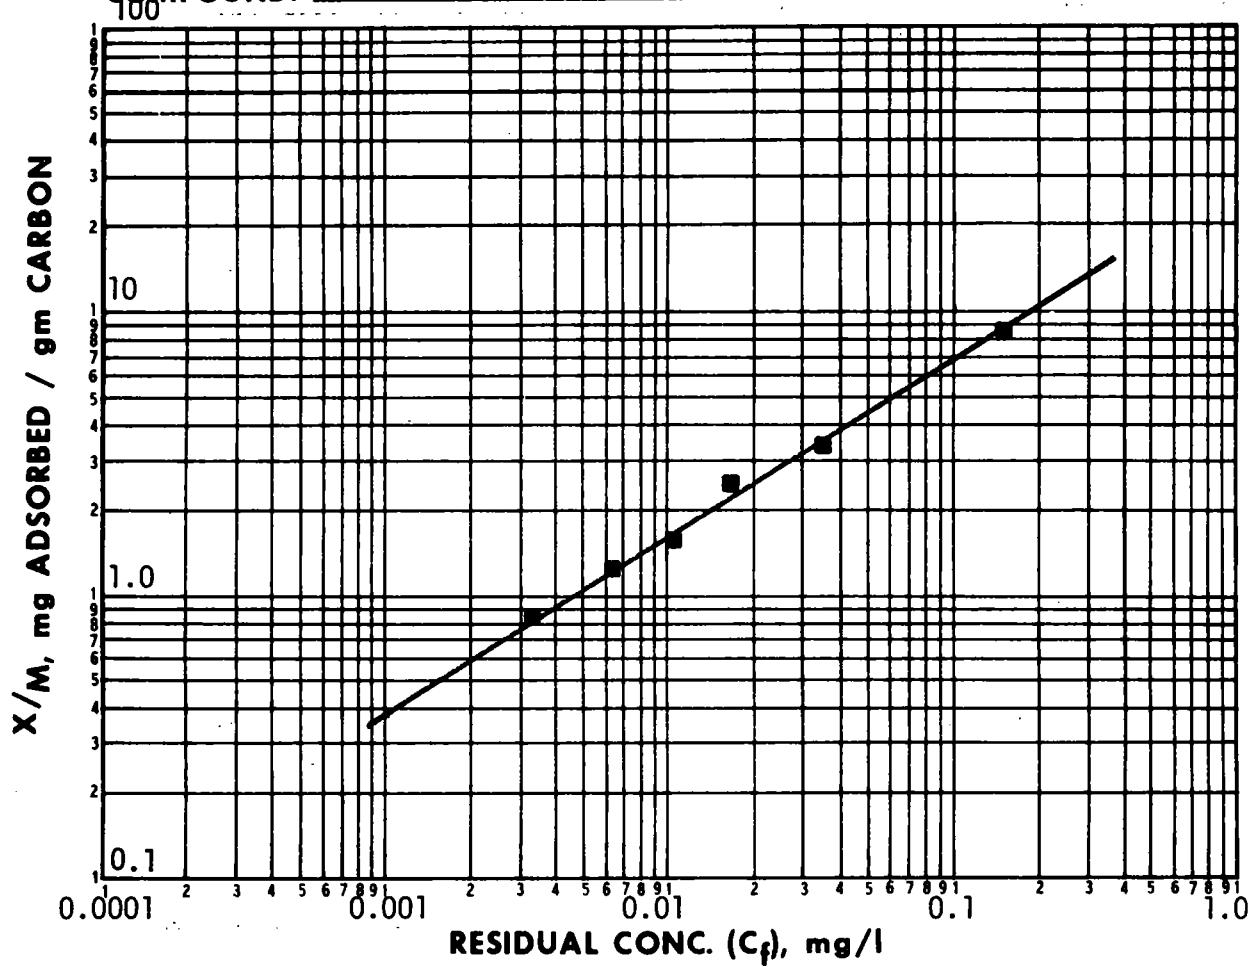

CARBON DOSE mg/l	$\blacksquare \text{ pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	1.000								
96	0.164	0.836	8.70						
289	0.035	0.965	3.35						
385	0.018	0.982	2.55						
577	0.0104	0.990	1.71						
769	0.0061	0.994	1.29						
1154	0.0052	0.995	0.862						

COMPOUND: Trichlorofluoromethane

STRUCTURE:



FORMULA: CCl_3F **MOL. WT.** 137.4

FREUNDLICH PARAMETERS	pH		
	5.3		
K	5.6		
1/n	0.24		
Corr. Coef. r	0.90		
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	5.6		
0.1	3.2		
0.01	1.8		
0.001	1.1		

**CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)**

SINGLE STAGE POWDERED CARBON GRANULAR CARBON COLUMN
 C_f , mg/l

C_o , mg/l	0.1	0.01	0.001
1.0	280	530	930
0.1		48	92
0.01			8.4


C_o , mg/l	
1.0	180
0.1	31
0.01	5.6

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: G. C. Purge and Trap

REMARKS:


COMPOUND: Trichlorofluoromethane

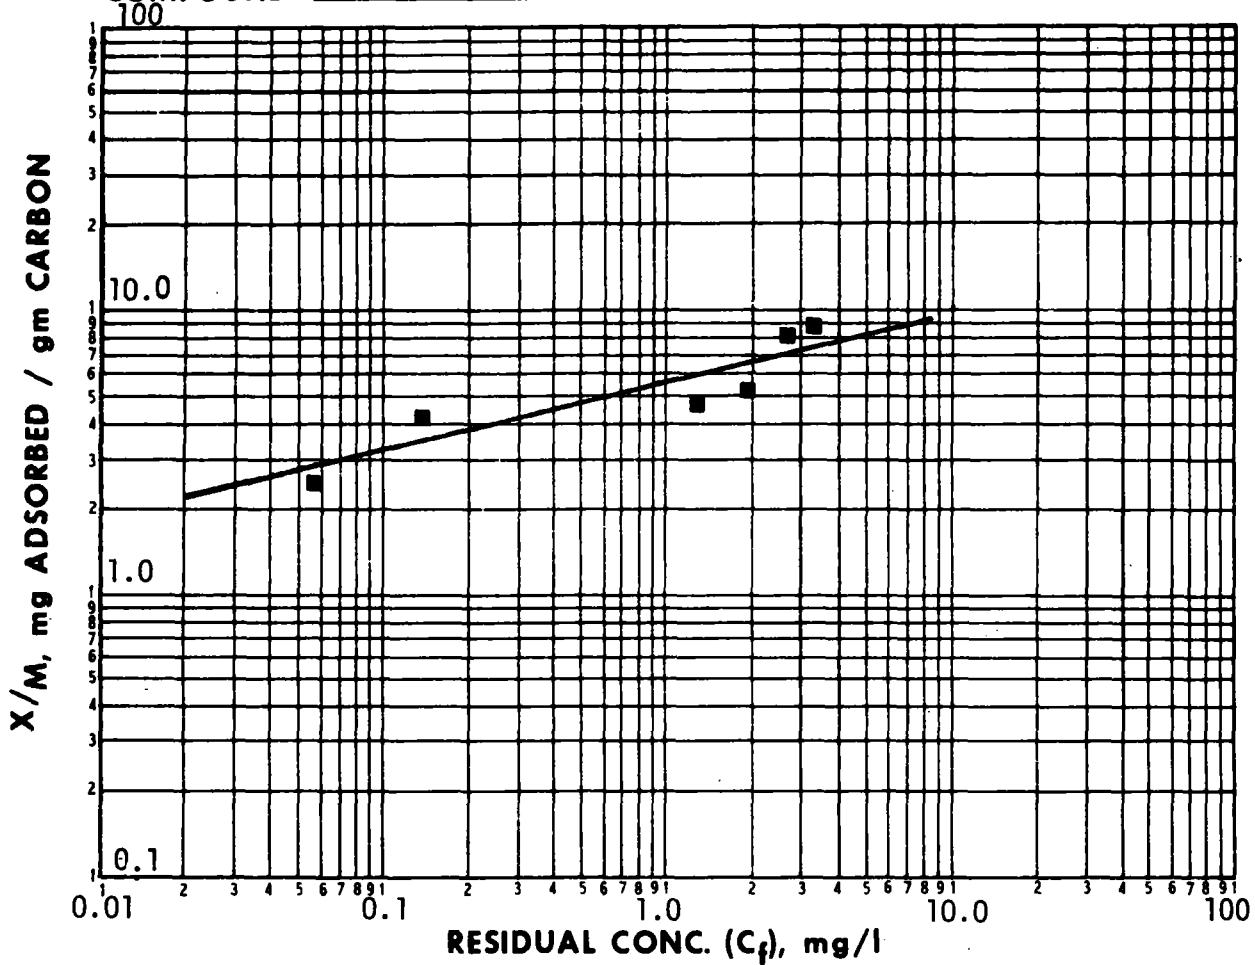

CARBON DOSE (mg/l)	$\text{pH} = 5.3$			$\text{pH} =$			$\text{pH} =$		
	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M	C_f	$C_o - C_f = X$	X/M
0	5.000								
192	3.27	1.73	8.98						
289	2.68	2.32	8.02						
577	1.98	3.02	5.23						
769	1.31	3.69	4.80						
1154	0.138	4.86	4.21						
1923	0.056	4.94	2.57						

COMPOUND: 2,4,6-Trichlorophenol

STRUCTURE:



FORMULA: C₆H₉OCl₃ MOL. WT. 197.45

FREUNDLICH PARAMETERS	pH		
	3.0	6.0	9.0
K	219.0	155.1	130.1
1/n	0.29	0.40	0.39
Corr. Coef. r	0.97	0.94	0.98
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	219.0	155.1	130.1
0.1	113.2	61.2	52.9
0.01	58.5	24.2	21.5
0.001	30.2	9.5	8.7

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l


C ₀ , mg/l	0.1	0.01	0.001
1.0	15	41	105
0.1		3.7	10.4
0.01			0.9

C ₀ , mg/l	
1.0	6.4
0.1	1.6
0.01	0.4

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 312.6 nm.


REMARKS:

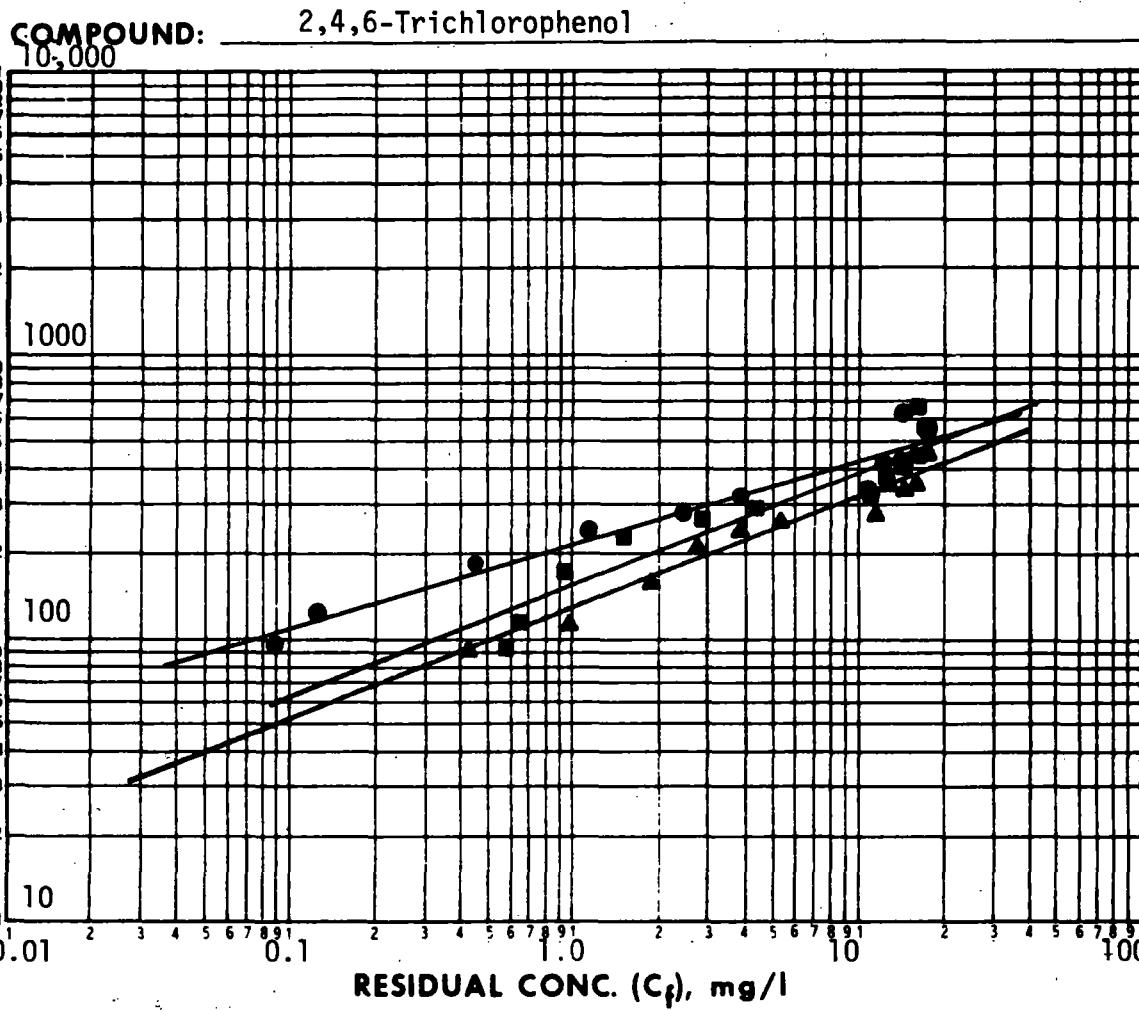

	$\bullet \text{ pH} = 3.0$			$\blacksquare \text{ pH} = 6.0$			$\blacktriangle \text{ pH} = 9.0$		
Carbon Dose mg/l	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M	C_f	$C_0 - C_f = X$	X/M
0	19.66			19.11			18.65		
2.5	18.24	1.42	568	17.38	1.73	692	17.50	1.15	460
5	16.54	3.12	624	16.85	2.26	452	16.80	1.85	370
10	15.37	4.29	429	15.09	4.02	402	15.23	3.42	342
15	13.31	6.35	423	13.30	5.81	387	13.24	5.41	361
25	11.05	8.61	344	11.01	8.10	324	11.44	7.21	288
50	3.98	15.68	314	4.32	14.79	296	5.20	13.45	269
60	2.47	17.19	286	2.85	16.26	271	3.93	14.72	245
75	1.22	18.44	248	1.63	17.48	233	2.79	15.86	212
100	0.47	19.19	192	0.94	18.17	182	1.90	16.75	168
150	0.13	19.53	130	0.65	18.46	123	0.98	17.67	118
200	0.09	19.57	98	0.58	18.53	93	0.42	18.23	91

COMPOUND: Triethanolamine

STRUCTURE:

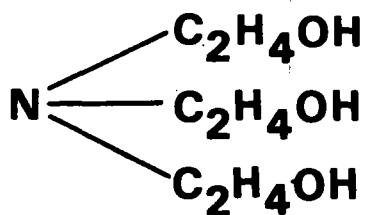

FORMULA: C₆H₁₅NO₃ MOL. WT. 149.19

FREUNDLICH PARAMETERS	pH		
K			
1/n			
Corr. Coef. r			
INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

C_f, mg/l

C ₀ , mg/l			

GRANULAR CARBON COLUMN


C ₀ , mg/l	

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Total Organic Carbon

REMARKS: Not adsorbed


COMPOUND: Triethanolamine

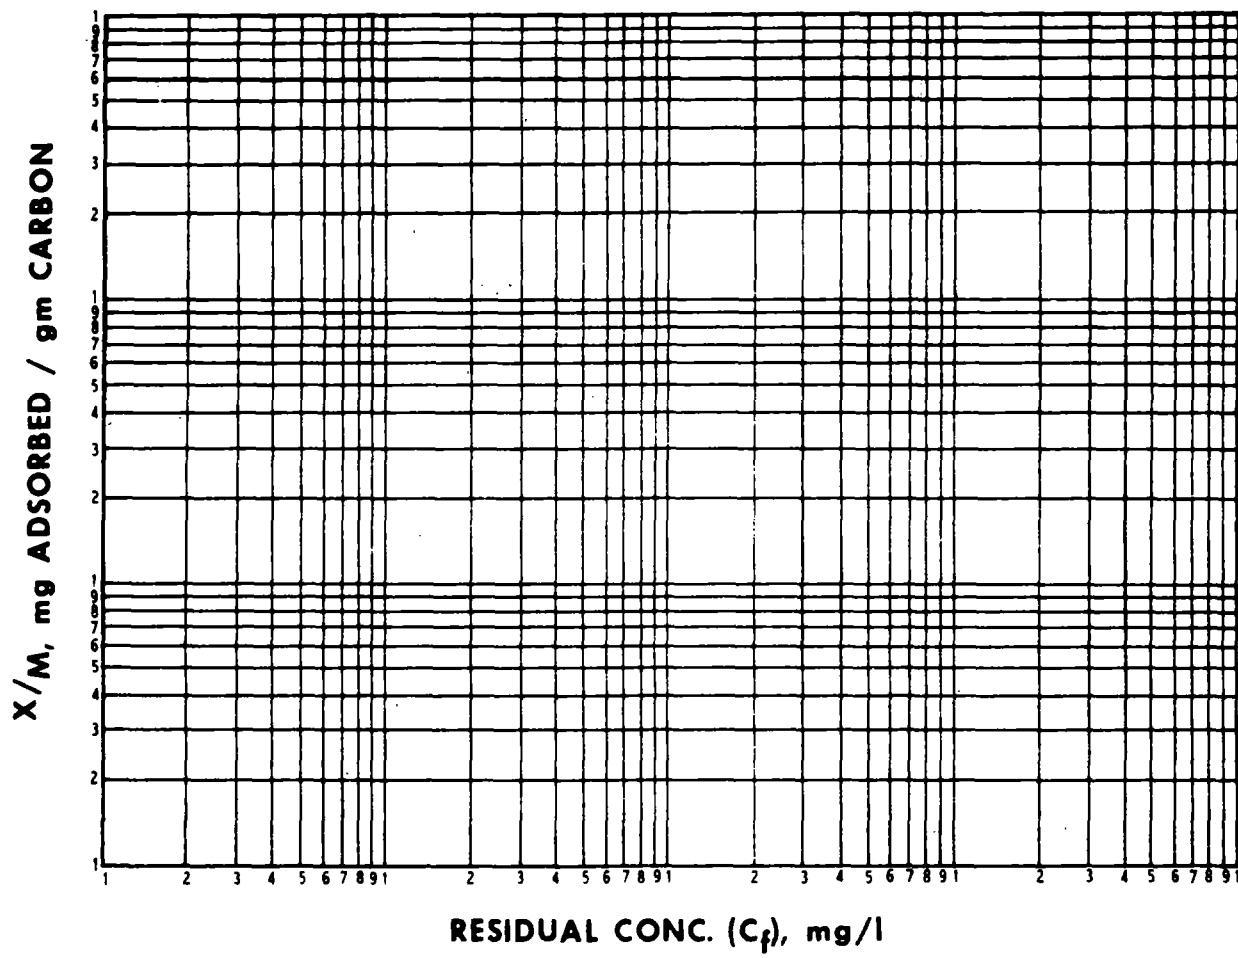

CARBON DOSE (mg/l)	pH = 3.0			pH = 7.0			pH = 9.0		
	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M	C_f	C_o - C_f = X	X/M
0	13.0		15.2			13.0			
5	12.6		14.4			13.0			
10	12.2		13.8			12.4			
25	12.8		12.4			11.8			
50	12.4		13.8			12.2			
100	13.0		12.4			11.2			
150	12.2		11.0			10.6			
200	12.8		10.8			10.8			

COMPOUND: Uracil

STRUCTURE:



FORMULA: C₄H₄N₂O₂ MOL. WT. 112.09

FREUNDLICH PARAMETERS	pH		
	All data pooled		
K	11		
1/n	0.63		
Corr. Coef. r	0.82		

INITIAL CONC. mg/l	ADSORPTION CAPACITY, mg/gm		
1.0	11		
0.1	2.6		
0.01	0.60		
0.001	0.14		

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

GRANULAR CARBON COLUMN

C_f, mg/l

C ₀ , mg/l	0.1	0.01	0.001
1.0	350	1,700	7,100
0.1		150	710
0.01			64


C ₀ , mg/l	
1.0	21
0.1	38
0.01	17

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 258 nm


REMARKS:

COMPOUND: Uracil

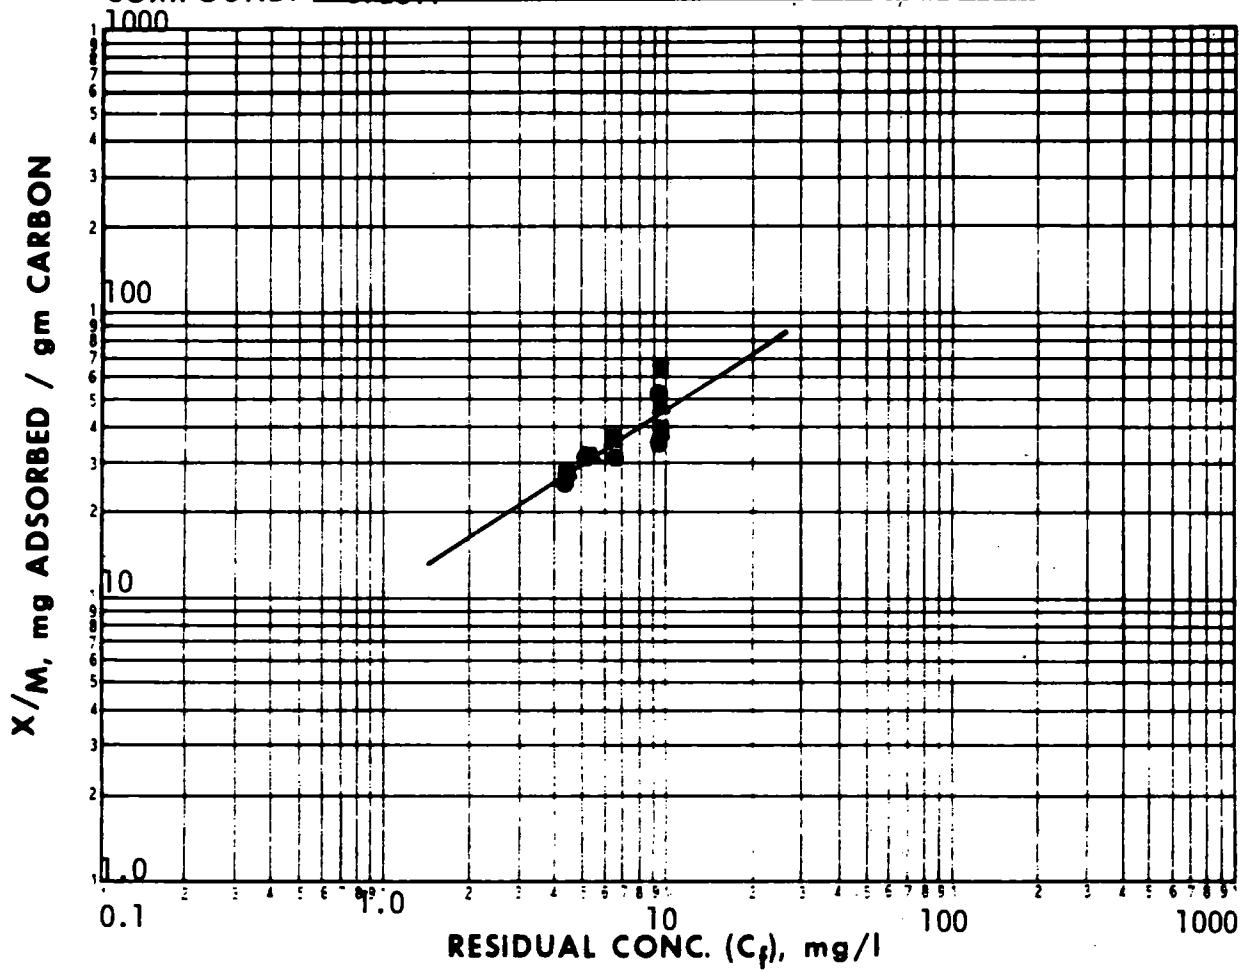

COMPOUND: P-Xylene

STRUCTURE:



FORMULA: C₈H₁₀ MOL. WT. 106.2

FREUNDLICH PARAMETERS	7.3	pH
K	85	
1/n	0.19	
Corr. Coef. r	0.93	
INITIAL CONC. mg/l		ADSORPTION CAPACITY, mg/gm
10	130	
1.0	85	
0.1	54	
0.01	35	

CALCULATED CARBON REQUIREMENTS TO ACHIEVE INDICATED
CHANGE IN CONCENTRATION (a)

SINGLE STAGE POWDERED CARBON

C_f, mg/l

C _o , mg/l	1.0	0.1	0.01
1.0		15	24
0.1			2.2
0.01			

GRANULAR CARBON COLUMN


C _o , mg/l	
1.0	12
0.1	1.9
0.01	0.3

(a) Carbon doses in mg/l at neutral pH.

ANALYTICAL METHOD: Ultraviolet Spectroscopy 267 nm

REMARKS:

COMPOUND: P-Xylene

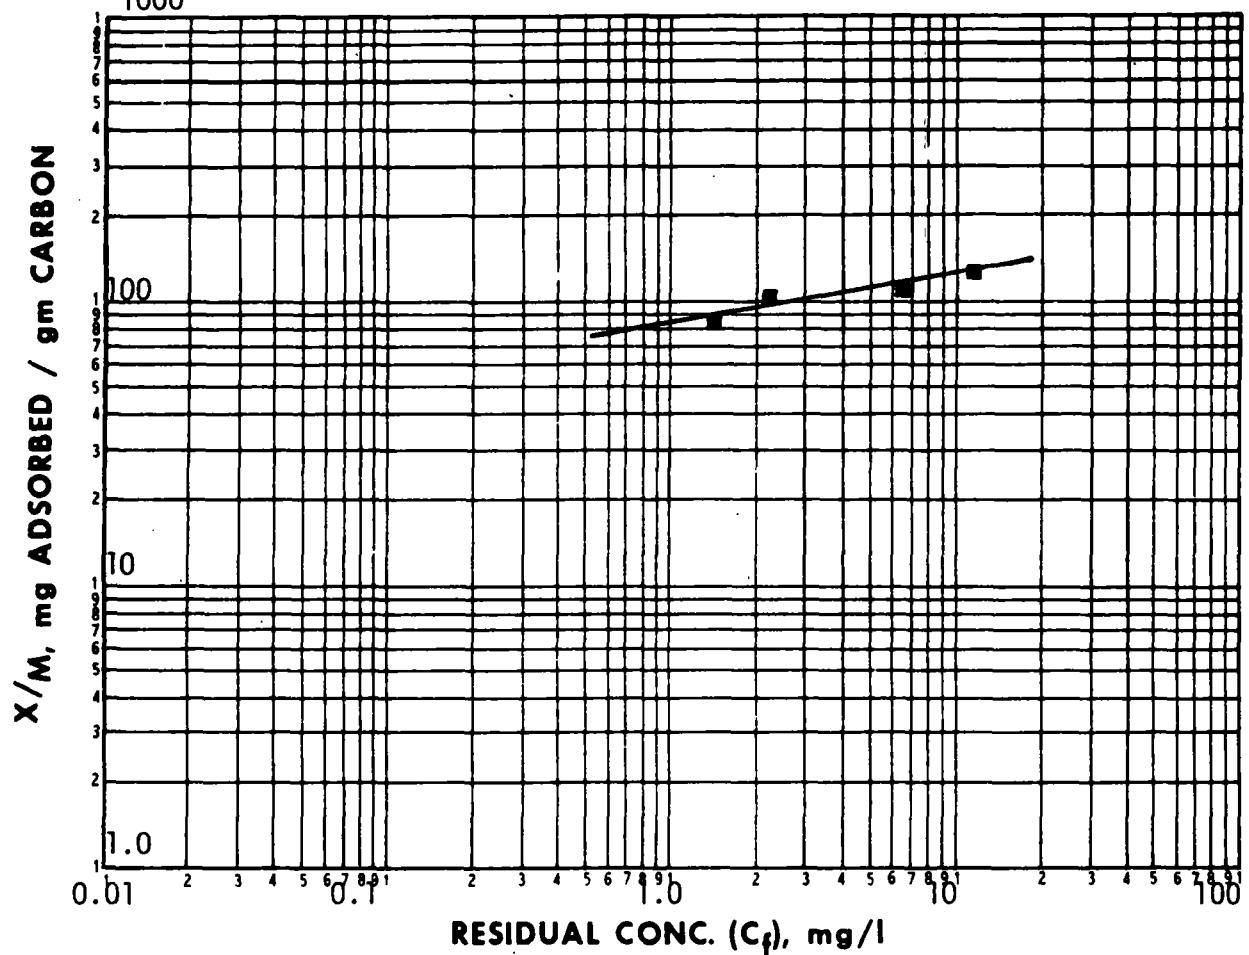

REFERENCES

1. Maugh, T. H. II. Chemicals: How Many Are There? *Science*, 199:162, 1978.
2. Shackelford, W. M., and L. H. Keith. Frequency of Organic Compounds Identified in Water. EPA-608/4-76-062, USEPA, Cincinnati, Ohio, December 1976.
3. Linner, E. R., and R. A. Gortner. Interfacial Energy and the Molecular Structure of Organic Compounds. III. The Effect of Organic Structure on Adsorbability. *J. Phys. Chem.*, 39:35, 1935.
4. Morris, J. C., and W. J. Weber, Jr. Adsorption of Biochemically Resistant Materials from Solution, Part 1. U. S. Public Health Service, AWTR-9, Report 999-WP-11, 1964.
5. Morris, J. C., and W. J. Weber, Jr. Adsorption of Biochemically Resistant Materials from Solution, Part II. U. S. Public Health Service, AWTR-16, Report 999-WP-33, 1966.
6. Ward, T. M., and F. W. Getzen. Influence of pH on the Adsorption of Aromatic Acids on Activated Carbon. *Environ. Sci. & Technol.*, 4:(1)64, 1970.
7. Aly, O. M., and S. D. Faust. Removal of 2,4-Dichlorophenoxyacetic Acid Derivatives from Natural Waters. *J. Am. Water Works Assn.*, 65:(2)221, 1965.
8. Dedrick, R. L., and R. B. Beckman. Kinetics of Adsorption by Activated Carbon from Dilute Aqueous Solution. *Chem. Engr. Progr. Symp. Ser.*, 63, 74, 1967.
9. Weber, W. J., Jr., and J. P. Gould. Organic Pesticides in the Environment. *Advan. Chem. Ser.*, 60. R. F. Gould (Ed.), Am. Chem. Soc., Washington, D. C., 1966.
10. DiGiano, F. J., and W. J. Weber, Jr. Technical Publication T-69-1. Dept. of Civil Engineering, Univ. of Michigan, Ann Arbor, 1969.
11. El-Dib, M. A., F. M. Ramadan, and M. Ismail. Adsorption of Sevin and Baygon on Granular Activated Carbon. *Water Research*, 9:795, 1975.

12. Bernardin, F. E., Jr., and E. M. Froelich. Practical Removal of Toxicity by Adsorption. Presented at the 30Th Annual Purdue Industrial Wastes Conference, May 8-9, 1975, Purdue University, Lafayette, Indiana.
13. Lawrence, J., and H. M. Tosine. Adsorption of Polychlorinated Biphenyls from Aqueous Solutions and Sewage. Environ. Sci. & Technol., 10:381, 1976.
14. Al-Bahrani, K. S., and R. J. Martin. Adsorption Studies Using Gas-Liquid Chromatography: I. Effect of Molecular Structure. Water Research, 10:731, 1976.
15. Argaman, Y. Treatment of Chlorinated Hydrocarbons' Wastewater By Activated Carbon Adsorption With Steam Regeneration. Prog. Wat. Tech., 9:65, 1977.
16. Singer, P. C., and C. Yen. Adsorption of Alkyl Phenols by Activated Carbon. Activated Carbon Adsorption of Organics from the Aqueous Phase, Proceedings of the September 1978 A C S Symposium, Miami Beach, Florida. (I. H. Suffet and M. J. McGuire, editors), Ann Arbor, Michigan. (In press 1980).
17. Muren, C. J., and V. L. Snoeyink. Competitive Adsorption of 2,4-Dichlorophenol and 2,4,6-Trichlorophenol in the Nanomolar to Micromolar Concentration Range. Environ. Sci. & Technol., 13:305, 1979.
18. Steiner, J., and J. E. Singley. Methoxychlor Removal from Potable Water. J. AWWA, 71:284, 1979.
19. El-Dib, M. A., and M. I. Badawy. Adsorption of Soluble Aromatic Hydrocarbons on Granular Activated Carbon. Water Research, 13:255, 1979.
20. Peel, R. G., and A. Benedek. Attainment of Equilibrium in Activated Carbon Isotherm Studies. Environ. Sci. & Technol., 14:66, 1980.
21. Fochtman, E. G., and R. A. Dobbs. Adsorption of Carcinogenic Compounds by Activated Carbon. Activated Carbon Adsorption of Organics from the Aqueous Phase., Proceedings of the September 1978 ACS Symposium in Miami Beach, Florida. (I. H. Suffet and M. J. McGuire, editors), Ann Arbor Sci. Publ., Ann Arbor, Michigan. (In press 1980).
22. Bellar, T. A., and J. J. Lichtenberg. Determining Volatile Organics at Microgram-per-Litre Levels by Gas Chromatography. J. AWWA, 66:739, 1974.

23. Austern, B. M., R. A. Dobbs, and J. M. Cohen. Gas Chromatographic Determination of Selected Organic Compounds Added to Wastewater. *Environ. Sci. & Technol.*, 9:588, 1975.
24. Environmental Protection Agency. Guidelines Establishing Test Procedures for the Analysis of Pollutants. 40 CFR Part 136, Federal Register, 44:69464, December 3, 1979.
25. May, W. E., and S. P. Wasik. Determination of the Solubility Behavior of Some Polycyclic Aromatic Hydrocarbons in Water. *Anal. Chem.*, 50:997, 1978.
26. Hassler, J. W., and W. E. McMinn. The Nature of Active Carbon. *Ind. Eng. Chem.*, 37:645, 1945.
27. Fochtman, E. G., and W. Eisenberg. Treatability of Carcinogenic and Other Hazardous Organic Compounds. Contract No. CI-68-03-2559, EPA-600/2-79-097, USEPA, Cincinnati, Ohio, August 1979.

BIBLIOGRAPHY

Cheremisinoff, P. N., and F. Ellerbusch, (editors), Carbon Adsorption Handbook. Ann Arbor Science Publishers, Inc., Ann Arbor, Michigan; 1978.

Hassler, J. W., Purification With Activated Carbon. Chemical Publishing Company, Incorporate, New York, New York; 1974.

Kipling, J. J. Adsorption from Solutions of Non-Electrolytes. Academic Press, New York, New York; 1965.

Mattson, J. S., and H. B. Mark, Jr. Activated Carbon-Surface Chemistry and Adsorption from Solution. Marcel Dekker, Incorporated, New York, New York; 1971.

Verschueren, K. Handbook of Environmental Data on Organic Chemicals. Van Nostrand Reinhold Company, New York, New York; 1977.

APPENDIX A

ACTIVATED CARBON ADSORPTION ISOTHERM PROTOCOL

1. General Discussion

1.1 Purpose of Test

Application of activated carbon for removal of solutes from aqueous solution is based on a property known as the adsorption capacity. The adsorption isotherm procedure is a method for the determination of the adsorptive capacity of activated carbons. The test can be used to compare adsorption capacities of different carbons for a given solute or to measure the adsorbability of different solutes on a given carbon.

2. Apparatus

2.1 Jar mill, jar and cylindrical grinding medium

2.2 Standard 200 mesh and 400 mesh sieves with 0.0029 inch (73.6 μ) and 0.0015 inch (38.1 μ) openings and mechanical sieve shakers.

2.3 Coordinated magnetic stirrers and stirring bars or jar test apparatus.

2.4 Ground-glass stoppered reagent bottles (1000 ml or appropriate volume).

2.5 Volumetric dispensing pipettes.

2.6 Filtration equipment; select from the following: 0.45 μ membrane filter, sintered silver filter disc, glass fiber filter paper, syringe equipped with a Swinney filter holder, or pressure filter apparatus.

2.7 Analytical balance

2.8 Drying oven

2.9 Desiccator

2.10 pH meter

3. Reagents

All reagents must be prepared with "organic-free" distilled water. Treatment of conventional distilled water with large amounts of activated carbon in a column or batch process is suitable for this purpose. If isotherm tests are to be conducted on volatile compounds the carbon-treated distilled water should be boiled for 15 - 20 minutes or purged over night with inert gas in order to remove volatile compounds which may contaminate distilled water during distillation or storage.

3.1 Preparation of adsorbent:

Although granular carbons can be compared or evaluated in their original form by means of a batch test, the general procedure is to pulverize the adsorbent. Use of pulverized carbon assures more rapid attainment of equilibrium. If the adsorbent is in granular form, place in jar with grinding medium. Jar should not be more than half full to insure efficient grinding of the carbon. Place on a jar mill until sample is pulverized. Sieve the pulverized material through a 200-mesh (0.0736 mm) sieve and retain on a 400-mesh (0.038/mm) sieve. Return carbon which did not pass through the 200-mesh sieve to the jar for additional grinding. Repeat procedure until approximately 90% of the sample passes the 200-mesh sieve. Powdered carbons are classified as described above without the grinding operation. Use the 200/400 mesh fraction for isotherm testing. Dry the classified carbon overnight in a drying oven at 105° C. Cool in a desiccator and store until needed for experimental purposes.

3.2 Preparation of activated carbon stock slurry: weigh out 50.00 grams of oven-dried and cooled pulverized carbon and transfer to a one-liter volumetric flask. Dilute to mark with "organic-free" distilled water. One ml of stock suspension contains 50 mg carbon. Prepare other working standard slurries by serial dilution of the stock slurry. Transfer slurries to appropriate flasks containing dispensing pipettes to provide a wide range of carbon concentrations. Table I lists the carbon dosages obtained with various volumes of stock slurry for one-liter sample volumes.

Table 1. Carbon Dosages for Given Pipette Volumes

Volume of Dispensing Pipette, (ml)	Carbon Dosage,* (mg/l)
5	250
10	500
15	750
20	1000
25	1250

* Not corrected for dilution of the one-liter sample volume

Dilution of the stock slurry by 1:10 and 1:100 would result in carbon doses 1/10 and 1/100 of those shown in Table 1.

3.3 Hydrochloric acid 6N. Dilute concentrated HCl 1:1 with "organic-free" distilled water.

3.4 Sodium hydroxide 6N. Add 240 grams of NaOH pellets to one liter of "organic-free" distilled water.

4. Procedure

4.1 If the test solution contains volatile or semivolatile components, place one-liter samples in a series of ground-glass stoppered reagent bottles. Add increasing carbon dosages to each successive sample. Add no carbon to one sample and use as a control. An initial concentration of 10 mg/l of test compound might require carbon dosages of 5, 10, 25, 50, 100, 250, 500, and 1000 mg/l. A preliminary isotherm may be required to bracket the desired range of dosages. Immediately after addition of the carbon dose, fill the reagent bottle to the bottom of the ground-glass stopper with additional test solution so that no air space remains. This will minimize loss of volatile solutes. Reagent bottle volumes should be recorded on the bottle and closely matched bottles used as a set. One-liter reagent bottles typically have a total volume of 1070-1090 ml. Carbon doses and test solution concentrations can be corrected for dilution associated with completely filling the ground-glass stoppered reagent bottles. In general, this correction is small and can be ignored.

4.2 Place the carbon-dosed samples on a coordinated magnetic stirrer apparatus and stir the control and samples for two hours. At the conclusion of the contact period separate the pulverized carbon from the test solution by an appropriate filtration procedure and analyze for the component of interest. Choice of filtration process will depend upon the characteristics of the test solution and the method of chemical analysis. Analysis of the control or a standard solution before and after filtration will determine whether or not a proper filtration method has been selected. Filtration of the sample should not result in a significant change in concentration of components.

In the case of volatile compounds, a syringe equipped with a Swinney filter holder can be used if the volume of filtrate required for analysis is small (i.e., analytical methods such as purge and trap gas chromatography, total organic carbon, or ultraviolet spectroscopy). Pressure filters can be used if larger volumes are required for analysis. Vacuum filtration with pre-washed membrane filters is suitable for solution containing nonvolatile components, provided adsorption losses are not encountered on the membrane. If adsorption losses are evident, sintered silver membranes or glass fiber paper can be used for separation of the pulverized carbon. Carbon can also be separated by centrifugation.

4.3 Analysis of the filtrate: The concentration of solute in equilibrium with each carbon dose is measured by an appropriate quantitative method such as spectrophotometry, colorimetry, total organic carbon, gas chromatography, evaporation to residue or other analytical technique.

5. Treatment of Data

5.1 Calculation of adsorption capacity: Activated carbon adsorption isotherm data are usually plotted according to the Freundlich equation. Detailed discussion of the equation and its uses can be found in the literature. Although the equation is empirical, it is nonetheless widely used and has been found to adequately describe the adsorption process in dilute solution. The Freundlich equation has the form:

$$\frac{X}{M} = K C_f^{\frac{1}{n}}$$

where $X = C_0 - C_f$ which is the amount of solute adsorbed from a given volume of solution

C_0 = initial concentration of solute in the untreated solution

C_f = final concentration in the treated solution at equilibrium

M = weight of activated carbon added to the solution

K & $1/n$ = empirical constants

Data are fitted to the logarithmic form of the above equation which can be written as follows:

$$\log \frac{X}{M} = \log K + \frac{1}{n} \log C_f \quad (2)$$

For dilute solutions this equation yields a straight line with a slope of $1/n$ and an intercept equal to the value of K (when $C_f = 1$) when X/M is plotted as a function of C_f on logarithmic paper. The intercept is an indicator of adsorption capacity and the slope of adsorption intensity.

A convenient form for tabulation of adsorption isotherm data is shown on the standard data form. Carbon dosages are shown in the left-hand column. The next column for each set of data contains the residual concentrations remaining in solution after carbon treatment. The C_f value for the control sample corresponding to the zero carbon dose is the C_0 value. The amount of solute adsorbed (X) is calculated by subtracting each C_f value from C_0 and is summarized in the appropriate column. Dividing "X" in mg of solute by the carbon dose in grams gives the adsorption capacity (X/M) per gram of carbon shown in the final column for each set of data. X/M values are plotted as a function of C_f according to equation (2) on logarithmic paper.

5.2 Least squares regression analysis may be used to locate the best-fit line for the plotted data points. A small programmable calculator is convenient for this purpose.

5.3 Extrapolation of the plotted isotherm to $C_f = 0$ (C_f value with zero carbon dose) gives the adsorption capacity at the initial concentration by noting the corresponding value from the X/M axis. Adsorption capacities at other concentrations can be read in the same manner. As the Freundlich equation states the adsorption capacity of carbon, X/M, is a function of the equilibrium concentration, C_f , of the solute.

5.4 Freundlich parameters: The plotted isotherm can be used to obtain the Freundlich parameters K and 1/n. K can be read from the X/M axis at $C_f = 1$. The slope (1/n) can be measured graphically using a ruler (i.e., mm rise/mm span) or taken from the programmable calculator. These parameters are useful in comparing the adsorbability of solutes and in rating the efficiency of different activated carbons.


6. Alternative Procedures

6.1 The pH of the test solution can affect the equilibrium adsorption capacity. For acidic solutes adsorption is favored at low pH while basic compounds are more strongly adsorbed at higher pH values. Solution pH can be adjusted with hydrochloric acid or sodium hydroxide prior to addition of the carbon if these effects are to be measured. Values of 3.0, 7.0, and 9.0 are recommended as a suitable range to determine pH effects. Use of buffers may be desirable in certain cases where a change in pH during adsorption is to be avoided.

6.2 In cases where nonvolatile solutes are to be measured it is not necessary to fill the reagent bottle to the bottom of the ground-glass stopper. If any doubt exists as to the volatility of the solute(s) completely filled reagent bottles should be used.

6.3 Isotherm testing is usually conducted at room temperature ($22 \pm 2^\circ C$) although conditions can be varied experimentally if desired.

COMPOUND: 2,6-Dinitrotoluene

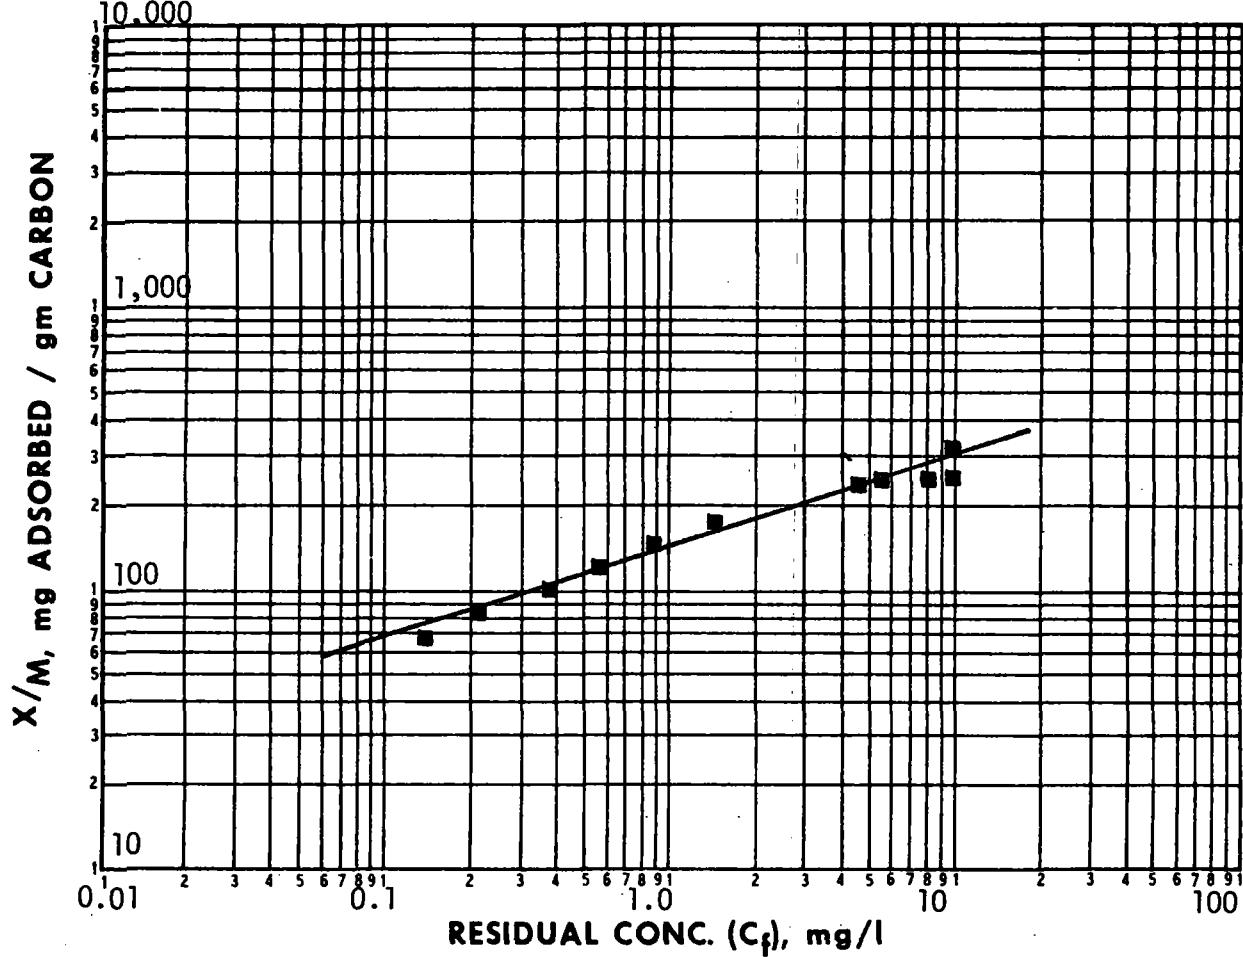

CARBON DOSE mg/l	■ pH = 5.4			pH =			pH =		
	C _f	C _o - C _f = X	X/M	C _f	C _o - C _f = X	X/M	C _f	C _o - C _f = X	X/M
0	10.58								
2.5	9.80	0.780	312						
5	9.28	1.30	260						
10	8.00	2.58	258						
20	5.48	5.10	255						
25	4.50	6.08	243						
50	1.45	9.13	183						
60	0.89	9.69	162						
75	0.56	10.02	134						
100	0.38	10.20	102						
125	0.21	10.37	83						
150	0.14	10.44	70						

APPENDIX B

PUBLISHED SOLUBILITIES OF SELECTED COMPOUNDS

<u>Compound</u>	<u>Solubility mg/l</u>	<u>Temp. °C</u>	<u>Reference</u>
Acenaphthene	3.47	25	1
Acrolein	40g/100 ml H ₂ O	-	2
Acrylonitrile	73,500	20	1
	75,000	25	2
Benzene	1,800	25	1
Benzidine	400	12	1
	400	-	2
Carbon Tetrachloride	785	20	1
	797	-	2
Chlorobenzene	488	25	1
	490	20	2
1,2,4 Trichlorobenzene	30	-	3
Hexachlorobenzene	0.006	25	1
1,2 Dichloroethane	8,690	20	1
	8,300	25	2
1,1,1 Trichloroethane	480 - 4,400	20	1
	4,400	20	2
Hexachloroethane	50	22	1
1,1 Dichloroethane	5,500	20	1
	5,000	-	2
1,1,2 Trichloroethane	4,500	20	1

<u>Compound</u>	<u>Solubility</u> mg/l	<u>Temp.</u> °C	<u>Reference</u>
1,2 Dichloropropane	2,700 2,700	20 20	1 2
1,3 Dichloropropylene	(cis) 2,700 (trans) 2,800	25 25	1 1
2,4 Dimethylphenol 3,5 Dimethylphenol	17,000 4,200	160 20	1 1
2,4 Dinitrotoluene	270 300	22 22	1 2
2,6 Dinitrotoluene	no data		
1,2 Diphenylhydrazine	221	-	2
Ethylbenzene	152 100	20 15	1 2
Fluoranthene	0.26	25	1
4 Chlorophenyl phenyl ether	59	20	1
4 Bromophenyl phenyl ether	38	20	1
Bis(2-chloroisopropyl) ether	1,700	-	1
Bis(2-chloroethoxy) methane	81,000	-	1
Methylene chloride	13,200 - 20,000 20,000	25 20	1 2
Methyl chloride	6,450 - 7,250 280 ml/100 ml H ₂ O 5,380	20 16 25	1 2 7
Methyl bromide	900 17,500	20 20	1 2
Bromoform	3,190 1,300	30 25	1 2
Dichlorobromomethane	Insoluble	-	2
Trichlorofluoromethane	1,100	25	1
Dichlorodifluoromethane	280	25	1

<u>Compound</u>	<u>Solubility mg/l</u>	<u>Temp. °C</u>	<u>Reference</u>
1,1,2,2 Tetrachloroethane	2,900	20	1
	2,870	25	2
Chloroethane	5,740	20	1
	5,740	25	2
Bis(chloromethyl) ether	22,000(calculated)		1
	Hydrolyzes ($t_{1/2} = 38$ sec)		1
	Decomposes		2
Bis(2-chloroethyl) ether	10,200	-	1
	11,000	20	2
2 Chloroethyl vinyl ether	15,000	-	1
2 Chloronaphthalene	6.74	25	1
2,4,6 Trichlorophenol	800	25	1
	900	25	2
Parachlorometacresol	3,850	20	1
	3,800	20	2
Chloroform	8,200	20	1
	8,200	20	2
2 Chlorophenol	28,500	20	1
	28,500	20	2
1,2 Dichlorobenzene	145	25	1
	145	25	2
1,3 Dichlorobenzene	123	-	1
	39	-	2
1,4 Dichlorobenzene	79	25	1
	80	25	2
3,3' Dichlorobenzidine	No data		
1,1 Dichloroethylene	400	20	1
	5,000	20	2
1,2 trans-Dichloroethylene	600	20	1
2,4 Dichlorophenol	4,500	20	1
	4,500	20	2

<u>Compound</u>	<u>Solubility</u> mg/l	<u>Temp.</u> °C	<u>Reference</u>
Chlorodibromomethane	No data		
Hexachlorobutadiene	2	20	1
Hexachlorocyclopentadiene	0.805	-	1
Isophorone	Insoluble	-	2
Naphthalene	34.4 30	25 25	1 2
Nitrobenzene	1,900 2,000	20 25	1 2
2 Nitrophenol	2,100	20	1
4 Nitrophenol	16,000	25	1
2,4 Dinitrophenol	5,600 1,370	18 54.5	1 2
4,6 Dinitro-o-cresol	250	-	2
N-Nitrosodimethylamine	Miscible	-	1
N-Nitrosodiphenylamine	No data		
N-Nitrosodi-n-propylamine	9,895	25	1
Pentachlorophenol	14 20	20 30	1 2
Phenol	93,000 6700 mg/100 ml H ₂ O	25 25	1 2
Bis(2-Ethylhexyl)phthalate	50	25	1
Butyl benzyl phthalate	Insoluble	-	1
Di-n-butyl phthalate	4,500 4,500	25 25	1 8
Di-n-octyl phthalate	Insoluble	-	1
Diethyl phthalate	1,000	32	1
Dimethyl phthalate	4,000	32	1

<u>Compound</u>	<u>Solubility</u> mg/l	<u>Temp.</u> °C	<u>Reference</u>
Benzo(a)anthracene	0.014	25	1
Benzo(a)pyrene	0.0038	25	1
3,4 Benzofluoranthene	0.0012	25	1
Benzo(k)fluoranthene	0.00055	25	1
Chrysene	0.002	25	1
Acenaphthylene	3.93	25	1
Anthracene	0.073 0.075	25 15	1 2
Benzo(ghi)perylene	0.00026	25	1
Fluorene	1.98	25	1
Phenanthrene	1.29 1.6	25 15	1 2
Dibenzo(a,h)anthracene	0.0005	25	1
Indeno(1,2,3-cd)pyrene	0.62	25	1
Pyrene	0.14	25	1
Tetrachloroethylene	150 - 200 200	20 -	1 2
Toluene	535 500	25 16	1 2
Trichloroethylene	1,100 1,000	20 25	1 2
Vinyl chloride	1.1 1	25 25	1 2
Aldrin	0.2	20	2
Dieldrin	0.186	25-29	2
Chlordane	0.056 1.85		3 4

<u>Compound</u>	<u>Solubility</u> mg/l	<u>Temp.</u> °C	<u>Reference</u>
4,4' DDT	0.002	-	2
4,4' DDE	0.010	-	3
	0.014	-	4
4,4' DDD	0.005	-	3
	0.020	-	4
a-Endosulfan-Alpha	0.530	-	4
b-Endosulfan-Beta	0.280	-	4
Endosulfan Sulfate	No data		
Endrin	0.23	25	2
Endrin aldehyde	No data		
Heptachlor	0.056	25-29	2
Heptachlor epoxide	0.350	-	4
	0.350	30	5
α BHC - Alpha	2.0	-	4
	2.03	28	6
β BHC - Beta	0.240	-	4
	0.20	28	6
γ BHC - Gamma	7.3	25	2
	31.4	-	4
	15.7	28	6
δ BHC - Delta	No data		6
PCB - 1242	0.24	-	1
	0.70	-	9
PCB - 1254	0.012	-	1
	0.07	-	9
PCB - 1221	15	-	1
	3.5	-	9
PCB - 1232	1.45	-	1
PCB - 1248	0.054	-	1

<u>Compound</u>	<u>Solubility</u> <u>mg/l</u>	<u>Temp.</u> <u>°C</u>	<u>Reference</u>
PCB - 1260	0.0027	-	1
	0.00095		7
PCB - 1016	0.34	-	1
	0.91		9
Toxaphene	3	20	2
2,3,7,8 Tetrachlorodibenzo-p-dioxin		No data	

References

1. Water-Related Environmental Fate of 129 Priority Pollutants. A Literature Search by Versar, Incorporated for USEPA Office of Water Planning and Standards. Contract No. 68-01-3852. January - February, 1979. Draft Copies.
2. ISHOW Data Base, University of Minnesota, Duluth. April 1979.
3. Spencer, W. F., and W. J. Farmer, Assessment of the Vapor Behavior of Toxic Organic Chemicals. Contribution of Federal Research, SEA, USDA, and the University of California, Riverside, California.
4. Weil, L., G. Dure, and K. E. Quentin, Solubility in Water of Insecticide Chlorinated Hydrocarbons and Polychlorinated Biphenyls in View of Water Pollution, Z. Wasser Abwasser Forsch. 7(6), 169 (1974).
5. Park, K. S., and W. N. Bruce, The Determination of the Water Solubility of Aldrin, Dieldrin, Heptachlor, and Heptachlor Epoxide. J. Econ. Entomol., 61, 770 (1968).
6. Kurihara, N., M. Uchida, T. Fujita, and M. Nakajima, Benzene Hexachloride Isomers and Related Compounds. Pestic. Biochem. Physio., 2(4), 383 (1973).
7. Chiou, C. T., V. H. Freed, D. W. Schmedding, and R. L. Kohnert, Partition Coefficient and Bioaccumulation of Selected Organic Chemicals. Environ. Sci. & Technol., 11(5) 475 (1977).
8. Residue Reviews, F. A. Gunther (editors), Springer-Verlag, New York, New York. 1975, p. 6.
9. Lee, M., E. Chian, and R. Griffin, Qualitative Study of the Solubility of Polychlorinated Biphenyls (PCBs) and Capacitor Fluid in Water. Progress Report for USEPA Grant R-804684 (October 1978).

TECHNICAL REPORT DATA
(Please read Instructions on the reverse before completing)

1. REPORT NO. EPA-600/8-80-023	2.	3. RECIPIENT'S ACCESSION NO.
4. TITLE AND SUBTITLE CARBON ADSORPTION ISOTHERMS FOR TOXIC ORGANICS		5. REPORT DATE April 1980 (Issuing Date) 6. PERFORMING ORGANIZATION CODE
7. AUTHOR(S) Richard A. Dobbs, Jesse M. Cohen		8. PERFORMING ORGANIZATION REPORT NO.
9. PERFORMING ORGANIZATION NAME AND ADDRESS Wastewater Research Division, TPDB, P-CTS Municipal Environmental Research Laboratory U.S. Environmental Protection Agency Cincinnati, Ohio 45268		10. PROGRAM ELEMENT NO. 36B1C AI-02 11. CONTRACT/GRAANT NO.
12. SPONSORING AGENCY NAME AND ADDRESS Municipal Environmental Research Laboratory-Cin., OH Office of Research and Development U.S. Environmental Protection Agency Cincinnati, Ohio 45268		13. TYPE OF REPORT AND PERIOD COVERED Research 8/72 - 3/1980 14. SPONSORING AGENCY CODE EPA/600/14
15. SUPPLEMENTARY NOTES Contact: Richard A. Dobbs (513) 684-7649		
16. ABSTRACT An experimental protocol for measuring the activated carbon adsorption isotherm was developed and applied to a wide range of organic compounds. Methods for treatment of the isotherm data and a standard format for presentation of results are shown. In the early phase of the study selection of compounds for testing in the experimental program presented a formidable task. Initial selections were based on the following criteria: (1) annual quantity produced, (2) critical concentration required to produce an adverse environmental effect, (3) probability of occurrence in water or wastewater, (4) persistence in the water environment, and (5) solubility. During the course of the study the Occupational Safety and Health Administration's (OSHA) list of regulated carcinogens and the U.S. Environmental Protection Agency's Consent Decree list of priority pollutants were developed. These compounds were added to those previously selected for the experimental phase of the study.		
17. KEY WORDS AND DOCUMENT ANALYSIS		
a. DESCRIPTORS Activated Carbon Treatment Adsorption	b. IDENTIFIERS/OPEN ENDED TERMS Physical-Chemical Treatment	c. COSATI Field/Group 13B
18. DISTRIBUTION STATEMENT Release to Public		19. SECURITY CLASS (<i>This Report</i>) Unclassified 21. NO. OF PAGES 332 20. SECURITY CLASS (<i>This page</i>) Unclassified 22. PRICE